75V, Synchronous Buck Controller Featuring Adaptive On-Time Control with External Soft Start

Features

- Hyper Speed Control® Architecture Enables:
 - High Input to Output Voltage Conversion Ratio Capability
 - Any Capacitor™ Stable
 - Ultra-Fast Load Transient Response
- Wide 4.5V to 75V Input Voltage Range
- · Adjustable Output Voltage from 0.6V to 30V
- 270 kHz to 800 kHz Programmable Switching Frequency
- · Built-in 5V Regulator for Single-Supply Operation
- Auxiliary Bootstrap LDO for Improving System Efficiency
- · Internal Bootstrap Diode
- · Adjustable Soft-Start Time
- Enable Input and Power Good Output
- · Programmable Current Limit
- · Hiccup Mode Short-Circuit Protection
- · Internal Compensation and Thermal Shutdown
- · Supports Safe Start-Up into a Prebiased Output

Applications

- · Networking/Telecom Equipment
- · Base Station, Servers
- · Distributed Power Systems
- · Industrial Power Supplies

General Description


The MIC2128 is a constant-frequency synchronous buck controller featuring a unique adaptive on-time control architecture with external soft start. The MIC2128 operates over an input voltage range from 4.5V to 75V. The output voltage is adjustable down to 0.6V with a guaranteed accuracy of $\pm 1\%$. The device operates with programmable switching frequency from 270 kHz to 800 kHz.

The MIC2128 features an external soft-start pin (SS) which allows the user to adjust output soft-start time to reduce inrush current from mains during start-up. The MIC2128 features an auxiliary bootstrap LDO which improves the system efficiency by supplying the MIC2128 internal circuit bias power and gate drivers from output of the converter. A logic level enable (EN) signal can be used to enable or disable the controller. The MIC2128 can start-up monotonically into a prebiased output. The MIC2128 features an open drain power good signal (PG) which signals when the output is in regulation and can be used for simple power supply sequencing purpose.


The MIC2128 offers a full suite of protection features to ensure protection of the IC during Fault conditions. These include undervoltage lockout to ensure proper operation under power-sag conditions, "hiccup" mode short-circuit protection and thermal shutdown.

The MIC2128 is available in a 16-pin 3 mm x 3 mm QFN package, with an operating junction temperature range from -40°C to +125°C.


Package Types

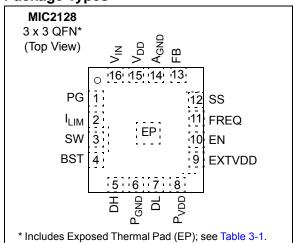

Typical Application

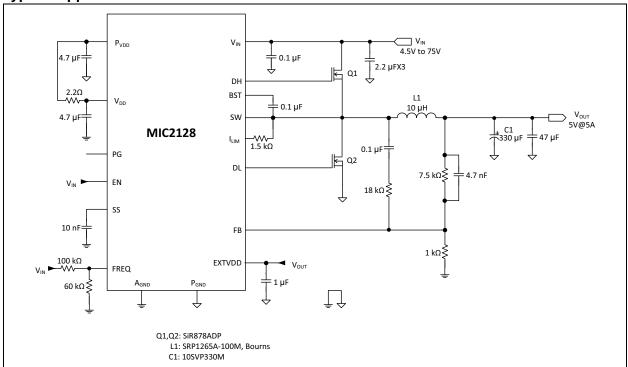

Functional Block Diagram

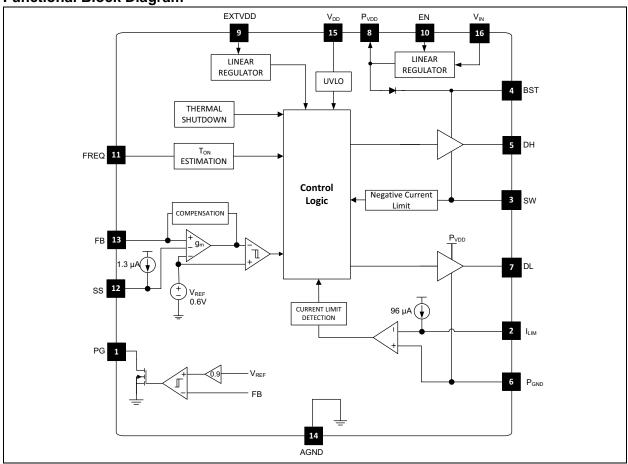

1.0 ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings †

V_{IN} , FREQ _, I_{LIM} , SW to P_{GND}	-0.3V to +76V
V _{DD} , P _{VDD} , FB, PG, SS to A _{GND}	-0.3V to +6V
EXTVDD to A _{GND}	-0.3V to +16V
BST to SW	0.3V to +6V
BST to A _{GND}	-0.3V to +82V
EN to A _{GND}	-0.3V to (V _{IN} +0.3V)
DH, DL to A _{GND}	0.3V to (V _{DD} +0.3V)
P _{GND} to A _{GND}	-0.3V to +0.3V
Junction Temperature	+150°C
Storage Temperature (T _S)	65°C to +150°C
Lead Temperature (soldering, 10s)	260°C
ESD Rating ⁽¹⁾	1000V

† Notice: Stresses above those listed under "Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational sections of this specification is not intended. Exposure to maximum rating conditions for extended periods may affect device reliability.

Note 1: Devices are ESD sensitive. Handling precautions recommended. Human body model, 1.5 k Ω in series with 100 pF.

Operating Ratings⁽¹⁾

Supply Voltage (V _{IN})	4.5V to 75V
SW, FREQ, I _{LIM} , EN	0V to V _{IN}
Junction Temperature (T _J)	40°C to +125°C
Package Thermal Resistance (3 mm × 3 mm QFN-16)	
Junction to Ambient (θ _{JA})	50.8°C/W
Junction to Case (θ_{JC})	25.3°C/W

Note 1: The device is not ensured to function outside the operating range.

ELECTRICAL CHARACTERISTICS (Note 1)

Electrical Specifications: un Boldface values indicate -40°			= 12V, \	/ _{OUT} = 1	.2V; V _{BS1}	$_{\Gamma}$ - V_{SW} = 5V, T_{A} = +25°C.
Parameter	Symbol	Min.	Тур.	Max.	Units	Test Conditions
Power Supply Input						
Input Voltage Range	V _{VIN}	4.5	_	5.5	V	P_{VDD} and V_{DD} shorted to V_{IN} ($V_{PVDD} = V_{VIN} = V_{VDD}$)
		5.5	_	75		
Quiescent Supply Current	ΙQ	_	1.4	1.8	mA	V _{FB} = 1.5V, no switching
Shutdown Supply Current	I _{VIN(SHDN)}	_	0.1	5	μA	EN = Low
		_	30	60	μA	$EN = Low, V_{IN} = V_{DD} = 5.5V$
PVDD,VDD and EXTVDD						
P _{VDD} Output Voltage	V _{PVDD}	4.8	5.1	5.4	V	V _{VIN} = 7V to 75V, I _{PVDD} = 10 mA
V _{DD} UVLO Threshold	V _{VDD_UVLO_Rise}	3.7	4.2	4.5	V	V _{DD} rising
V _{DD} UVLO Hysteresis	V _{VDD_UVLO_Hys}	_	600	_	mV	V _{DD} falling
EXTVDD Bypass Threshold	V _{EXTVDD_Rise}	4.4	4.6	4.85	V	EXTVDD rising
EXTVDD Bypass Hysteresis	V _{EXTVDD_Hys}	_	200	_	mV	
EXTVDD Dropout Voltage		_	250	_	mV	V _{EXTVDD} = 5V, I _{PVDD} = 25mA
Reference						
Feedback Reference Voltage	V _{REF}	0.597	0.6	0.603	V	T _J = 25°C
		0.594	0.6	0.606	V	$-40^{\circ}C \le T_{J} \le 125^{\circ}C$
FB Bias Current	I _{FB}	_	50	500	nA	V _{FB} = 0.6V
Enable Control						<u> </u>
EN Logic Level High	V _{EN_H}	1.6	_		V	
EN Logic Level Low	V _{EN_L}	_	_	0.6	V	
EN Hysteresis	V _{EN_Hys}	_	150	_	mV	
EN Bias Current	I _{EN}	_	6	30	μΑ	V _{EN} = 12V
ON Timer						<u> </u>
Switching Frequency	f ₀	_	800	_	kHz	$V_{FREQ} = V_{VIN}, V_{VIN} = 12V$
		230	270	300		V _{FREQ} = 33% of V _{VIN} , V _{VIN} = 12V
Maximum Duty Cycle	D _{MAX}		85	_	%	$V_{FREQ} = V_{VIN} = 12V$
Minimum Duty Cycle	D _{MIN}		0	_	%	V _{FB} > 0.6V
Minimum ON Time	t _{ON(MIN)}		80	_	ns	
Minimum OFF Time	t _{OFF(MIN)}	150	230	350	ns	
Soft-Start						
Soft-Start Current Source	I _{SS}	_	1.3	_	μA	
Current Limit						
Current-Limit Comparator Offset	V _{OFFSET}	-15	0	15	mV	V _{FB} = 0.59V
I _{LIM} Source Current	I _{CL}	80	96	110	μA	V _{FB} = 0.59V
I _{LIM} Source Current Tempco		_	0.3	_	μΑ/°C	
Negative Current Limit Comparator Threshold	_	_	48	_	mV	

Note 1: Specification for packaged product only.

^{2:} The application is fully functional at low V_{DD} (supply of the control section) if the external MOSFETs have low voltage V_{TH} .

ELECTRICAL CHARACTERISTICS (Note 1)

Electrical Specifications: unless otherwise specified, V_{IN} = 12V, V_{OUT} = 1.2V; V_{BST} - V_{SW} = 5V, T_A = +25°C. **Boldface** values indicate -40°C \leq T_J \leq +125°C (**Note 2**).

Boldiace values indicate -40 C \(\frac{1}{3} \) \(1							
Parameter	Symbol	Min.	Тур.	Max.	Units	Test Conditions	
FET Drivers							
DH On-Resistance, High State	R _{DH(PULL-UP)}	_	2	3	Ω		
DH On-Resistance, Low State	RDH _(PULL_DOWN)	_	2	4	Ω		
DL On-Resistance, High State	R _{DL(PULL-UP)}	1	2	4	Ω		
DL On-Resistance, Low State	R _{DL(PULL_DOWN)}		0.36	0.6	Ω		
SW, VIN and BST Leakage							
BST Leakage	_	_	_	30	μA		
V _{IN} Leakage	_		_	50	μA		
SW Leakage	_	_	_	50	μA		
Power Good (PG)							
PG Threshold Voltage	V_{PG_Rise}	85	_	95	%V _{OUT}	V _{FB} rising	
PG Hysteresis	V_{PG_Hys}	_	6	_	%V _{OUT}	V _{FB} falling	
PG Delay Time	PG_R_DLY	_	100	_	μs	V _{FB} rising	
PG Low Voltage	V _{OL_PG}	_	70	200	mV	V_{FB} < 90% × V_{NOM} , I_{PG} = 1 mA	
Thermal Protection							
Overtemperature Shutdown	T _{SHDN}		150	_	°C	Junction temperature rising	
Overtemperature Shutdown Hysteresis	T _{SHDN_Hys}	_	15	_	°C		

Note 1: Specification for packaged product only.

^{2:} The application is fully functional at low V_{DD} (supply of the control section) if the external MOSFETs have low voltage V_{TH} .

2.0 TYPICAL CHARACTERISTIC CURVES

Note: The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.

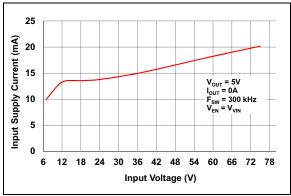


FIGURE 2-1: Input Supply Current vs. Input Voltage.

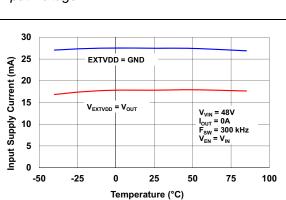


FIGURE 2-2: Input Supply Current vs. Temperature.

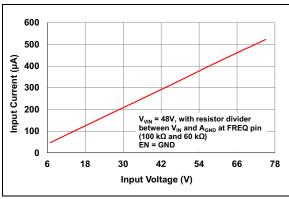


FIGURE 2-3: Input Shutdown Current vs. Input Voltage.

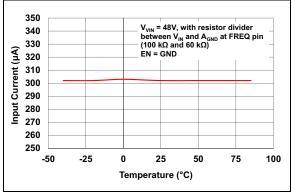


FIGURE 2-4: Input Shutdown Current vs. Temperature.

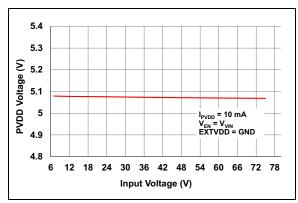


FIGURE 2-5: PVDD Line Regulation

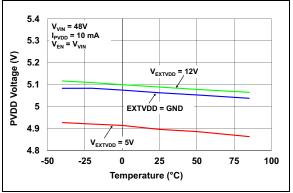


FIGURE 2-6: PVDD Voltage vs. Temperature.

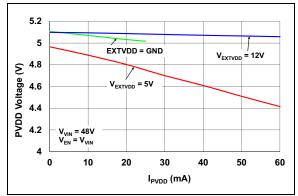


FIGURE 2-7: PVDD Load Regulation.

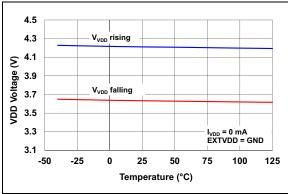


FIGURE 2-8: VDD UVLO Threshold vs. Temperature.

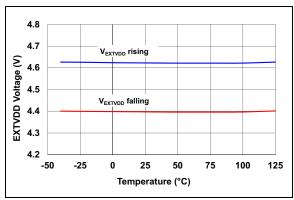


FIGURE 2-9: EXTVDD Threshold vs. Temperature.

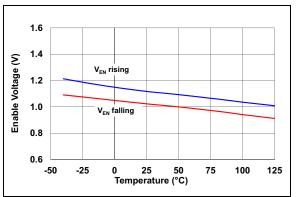


FIGURE 2-10: Enable Threshold vs. Temperature.

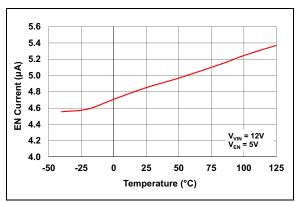


FIGURE 2-11: Enable Bias Current vs. Temperature

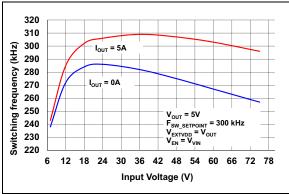


FIGURE 2-12: Switching Frequency vs. Input Voltage.

MIC2128

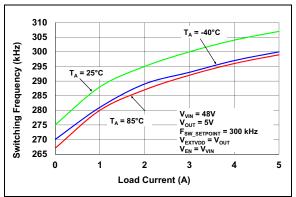


FIGURE 2-13: Switching Frequency vs. Load Current.

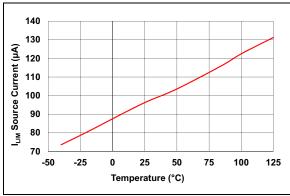


FIGURE 2-14: I_{LIM} Source Current vs. Temperature.

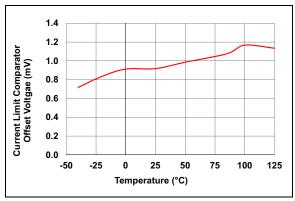


FIGURE 2-15: Current Limit Comparator Offset vs. Temperature.

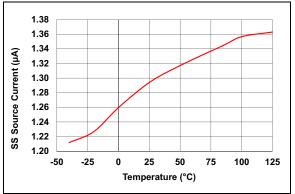


FIGURE 2-16: SS Source Current vs. Temperature.

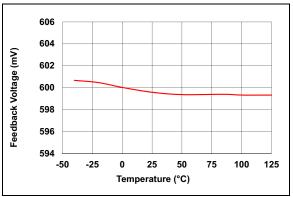


FIGURE 2-17: Feedback Voltage vs. Temperature.

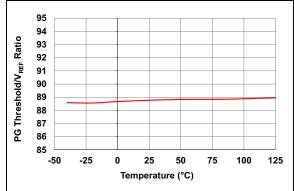


FIGURE 2-18: PG Threshold/V_{REF} Ratio vs. Temperature.

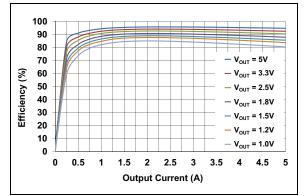


FIGURE 2-19: Efficiency vs. Output Current (Input Voltage=12V).

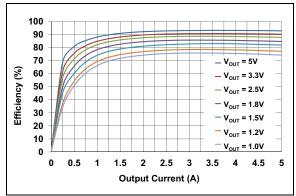


FIGURE 2-20: Efficiency vs. Output Current (Input Voltage = 24V).

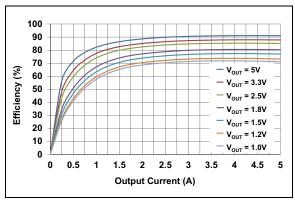


FIGURE 2-21: Efficiency vs. Output Current (Input Voltage = 36V).

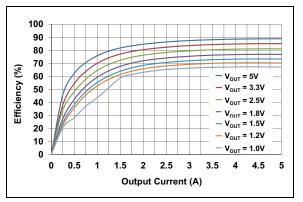


FIGURE 2-22: Efficiency vs. Output Current (Input Voltage = 48V).

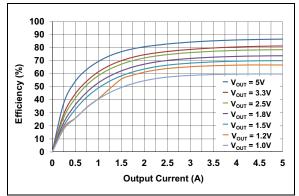


FIGURE 2-23: Efficiency vs. Output Current (Input Voltage = 60V).

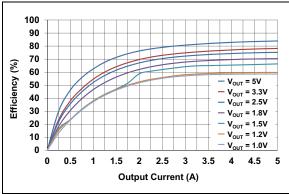


FIGURE 2-24: Efficiency vs. Output Current (Input Voltage = 75V).

MIC2128

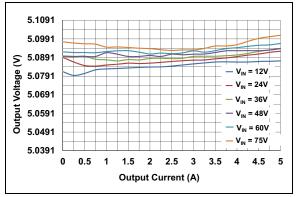


FIGURE 2-25: Load Regulation $(V_{OUT} = 5V)$.

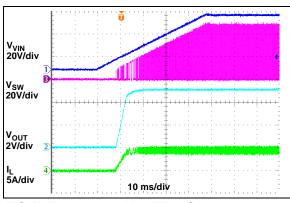


FIGURE 2-26: V_{VIN} Turn-On.

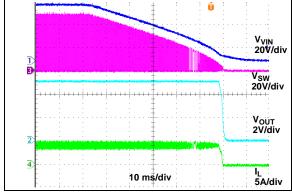


FIGURE 2-27: V_{VIN} Turn-Off.

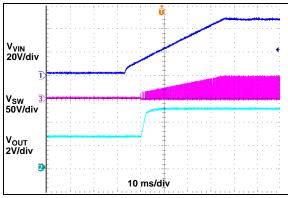


FIGURE 2-28: V_{VIN} Turn-On with Pre-biased Output.

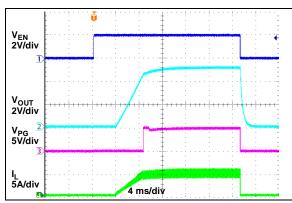


FIGURE 2-29: EN Turn-On/Turn-Off.

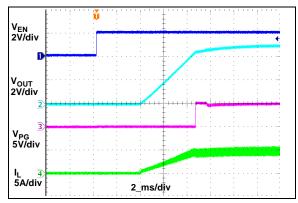


FIGURE 2-30: EN Turn-On Delay.

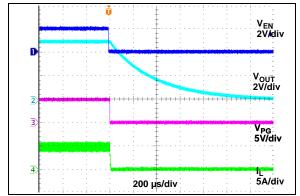


FIGURE 2-31: EN Turn-Off Delay.

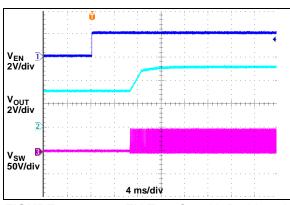


FIGURE 2-32: EN Turn-On with Prebiased Output.

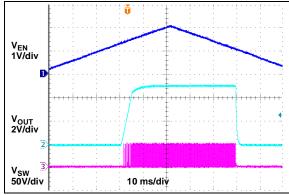


FIGURE 2-33: Enable Thresholds.

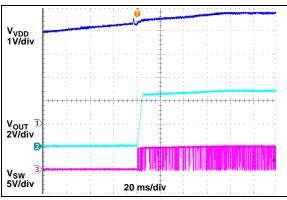


FIGURE 2-34: VDD UVLO Threshold-Rising.

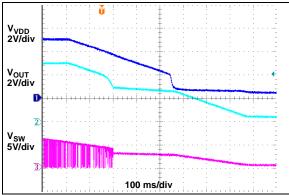


FIGURE 2-35: VDD UVLO Threshold-Falling.

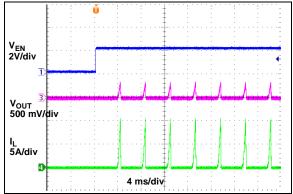


FIGURE 2-36: Enable into Output Short.

MIC2128

Note: Unless otherwise indicated, V_{VIN} = 48V, f_{SW} = 300 kHz, R_{ILIM} = 1.5 k Ω , L = 10 μ H, V_{EXTVDD} = V_{OUT} , T_A = +25°C (refer to the Typical Application circuit).

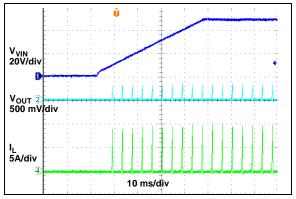


FIGURE 2-37:

Power-Up into Output Short.

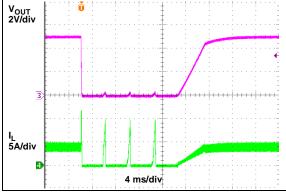


FIGURE 2-40: Circuit.

Recovery from Output Short

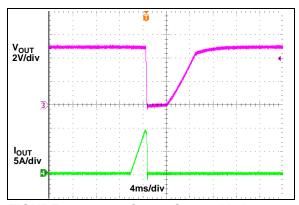


FIGURE 2-38: Threshold.

Output Current Limit

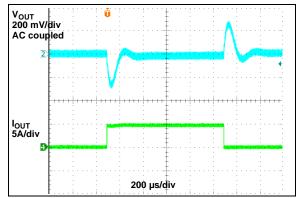


FIGURE 2-41: $(I_{OUT} = 0A \text{ to } 5A).$

Load Transient Response

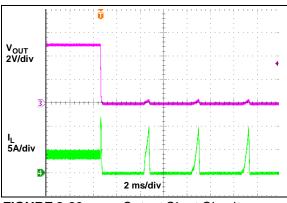


FIGURE 2-39:

Output Short Circuit.

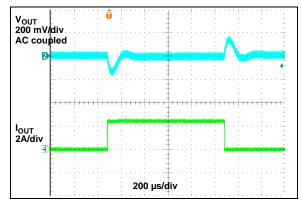


FIGURE 2-42: $(I_{OUT} = 0A \text{ to } 2.5A).$

Load Transient Response

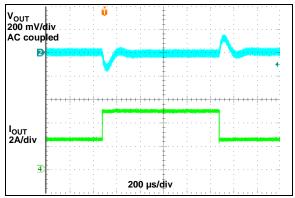


FIGURE 2-43: Load Transient Response $(I_{OUT} = 2.5A \text{ to } 5A)$.

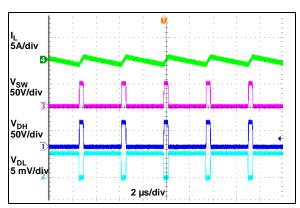


FIGURE 2-44: Switching Waveform at No Load.

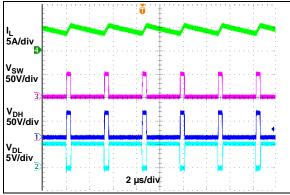


FIGURE 2-45: Switching Waveform at Full Load.

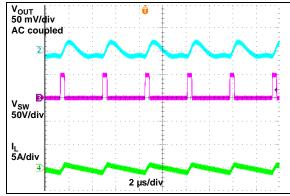


FIGURE 2-46: Switching Waveform at No Load.

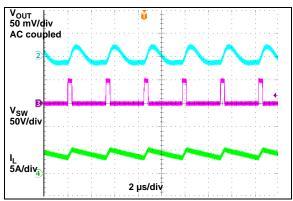


FIGURE 2-47: Switching Waveform at Full Load.

3.0 PIN DESCRIPTION

The descriptions of the pins are listed in Table 3-1.

TABLE 3-1: PIN FUNCTION TABLE

MIC2128	Symbol	Pin Function			
1	PG	Open-drain Power Good Output pin			
2	I _{LIM}	Current Limit setting resistor connection pin			
3	SW	Switch Pin and Current Sense Input for negative current limit			
4	BST	Bootstrap Capacitor Connection Pin			
5	DH	High-side N-MOSFET gate driver Output			
6	P_{GND}	Power Ground			
7	DL	Low-side N-MOSFET gate driver output.			
8	P _{VDD}	Internal high voltage LDO Output of the MIC2128			
9	EXTVDD	Supply to the internal low voltage LDO			
10	EN	Enable Input			
11	FREQ	Switching Frequency Programming Input			
12	SS	Soft-Start time setting capacitor connection pin			
13	FB	Feedback Input			
14	A _{GND}	Analog ground			
15	V _{DD}	Supply for the MIC2128 internal analog circuits			
16	V _{IN}	Supply Input for the internal high voltage LDO			
17	EP	Exposed Pad			

3.1 Power Good Output Pin (PG)

Connect PG to V_{DD} through a pull up resistor. PG is low when the FB voltage is 10% below the 0.6V reference voltage.

3.2 Current Limit Pin (I_{LIM})

Connect a resistor from I_{LIM} to SW to set current limit. Refer to **Section 4.3 "Current Limit (ILIM)"** for more details.

3.3 Switch Pin (SW)

SW pin provides return path for the high-side N-MOSFET gate driver when DH is low and is also used to sense low-side MOSFET current by monitoring the SW node voltage for negative current limit function.

Connect SW to the pin where high-side MOSFET source and the low-side MOSFET drain terminal are connected together.

3.4 Bootstrap Capacitor Pin (BST)

BST capacitor acts as supply for the high-side N-MOSFET driver. Connect a minimum of 0.1 μ F low ESR ceramic capacitor between BST and SW. Refer to Section 4.5 "High-Side MOSFET Gate Drive (DH)" section for more details.

3.5 High-Side N-MOSFET Gate Driver Output Pin (DH)

High-side N-MOSFET gate driver Output. Connect DH to the gate of external high-side N-MOSFET.

3.6 Power Ground Pin (P_{GND})

 P_{GND} provides return path for the internal low-side N-MOSFET gate driver output and also acts as reference for current limit comparator. Connect P_{GND} to the external low-side N-MOSFET source terminal and to the return terminal of P_{VDD} bypass capacitor.

3.7 Low-Side N-MOSFET Gate Driver Output Pin (DL)

Low-side N-MOSFET gate driver output. Connect to the gate terminal of the external low-side N-MOSFET.

3.8 Internal High Voltage LDO Output Pin (P_{VDD})

Internal high voltage LDO Output of the MIC2128. P_{VDD} is the supply for the low-side MOSFET driver and for floating high-side MOSFET driver. Connect a minimum of 4.7 μ F low ESR ceramic capacitor from P_{VDD} to P_{GND} .

3.9 EXTVDD

Supply to the internal low voltage LDO. Connect EXTVDD to the output of the Buck converter if it is between 4.7V to 14V to improve system efficiency. Bypass EXTVDD with a minimum of 1 μ F low ESR ceramic capacitor.

3.10 Enable Input Pin (EN)

EN is a logic input. Connect to logic high to enable the converter and connect to logic low to disable the converter.

3.11 Switching Frequency Programming Input Pin (FREQ)

Switching Frequency Programming Input. Connect to mid-point of the resistor divider formed between V_{IN} and A_{GND} to set switching frequency of the converter. Tie FREQ to V_{IN} to set the switching frequency to 800 kHz. Refer to Section 5.1 "Setting the Switching Frequency" for more details.

3.12 Soft-Start Time Setting Capacitor Connection Pin (SS)

Soft-Start time setting capacitor connection pin. Connect a ceramic capacitor from SS to A_{GND} to set the output Soft-Start time. Refer to **Section 5.3** "Setting the Soft-Start Time" section for further details.

3.13 Feedback Input Pin (FB)

FB is input to the transconductance amplifier of the control loop. The control loop regulates the FB voltage to 0.6V. Connect FB node to mid-point of the resistor divider between output and A_{GND} .

3.14 Analog Ground Pin (A_{GND})

 A_{GND} is reference to the analog control circuits inside the MIC2128. Connect A_{GND} to P_{GND} at one point on PCB.

3.15 Bias Voltage Pin (V_{DD})

Supply for the MIC2128 internal analog circuits. Connect V_{DD} to P_{VDD} of the MIC2128 through a low pass filter. Connect a minimum of 4.7 μF low ESR ceramic capacitor from V_{DD} to A_{GND} for decoupling.

3.16 Input Voltage Pin (V_{IN})

Supply Input to the internal high voltage LDO. Connect to the main power source and bypass to P_{GND} with a minimum of 0.1 μF low ESR ceramic capacitor.

3.17 Exposed Pad (EP)

Connect to $A_{\mbox{\footnotesize GND}}$ copper plane to improve thermal performance of the MIC2128.

4.0 FUNCTIONAL DESCRIPTION

The MIC2128 is an adaptive on-time synchronous buck controller designed to cover a wide range of input voltage applications ranging from 4.5V to 75V. An adaptive on-time control scheme is employed to get fast transient response and to obtain high voltage conversion ratios at constant switching frequency. Overcurrent protection is implemented by sensing low-side MOSFET's R_{DS(ON)} which eliminates lossy current sense resistor. The device features external soft-start, enable input, UVLO, power good output (PG), secondary bootstrap LDO and thermal shutdown.

4.1 Theory of Operation

The MIC2128 is an adaptive on-time synchronous buck controller which operates based on ripple at feedback node. The output voltage is sensed by the MIC2128 feedback pin (FB) and is compared to a 0.6V reference voltage (V_{REF}) at the low-gain transconductance error amplifier (gm) as shown in the Functional Block Diagram. Figure 4-1 shows the MIC2128 control loop timing during steady-state operation.

The error amplifier behaves as short circuit for the ripple voltage frequency on the FB pin which causes the error amplifier output voltage ripple to follow the feedback voltage ripple. When the transconductance error amplifier output (V_{gM}) is below the reference voltage of the comparator, which is same as the error amplifier reference (V_{REF}) , the comparator triggers and generates an on-time event. The on-time period is predetermined by the fixed t_{ON} estimator circuitry which is given by the following Equation 4-1:

EQUATION 4-1:

$$t_{ON(ESTIMATED)} = \frac{V_{OUT}}{V_{VIN} \times f_{SW}}$$

Where:

V_{OUT} = Output voltage

V_{VIN} = Power stage input voltage f_{SW} = Switching frequency

At the end of the ON time, the internal high-side driver turns off the high-side MOSFET and the low-side driver turns on the low-side MOSFET. The OFF time of the high-side MOSFET depends on the feedback voltage. When the feedback voltage decreases, the output of the gm amplifier (V_{gM}) also decreases. When the output of the gm amplifier (V_{gM}) is below the reference voltage of the comparator (which is same as the error amplifier reference (V_{REF})) the OFF time ends and ON time is triggered. If the OFF time determined by the feedback voltage is less than the minimum OFF time ($t_{OFF(MIN)}$)of the MIC2128, which is about 230 ns (typical), the MIC2128 control logic applies the $t_{OFF(MIN)}$ instead.

The maximum duty cycle can be calculated using the following Equation 4-2:

EQUATION 4-2:

$$D_{MAX} = \frac{t_{SW} - t_{OFF(MIN)}}{t_{SW}} = 1 - \frac{230ns}{t_{SW}}$$

Where:

 t_{SW} = Switching period, equal to 1/ f_{SW}

It is not recommended to use the MIC2128 with an OFF time close to t_{OFF(MIN)} during steady-state operation.

The adaptive on-time control scheme results in a constant switching frequency over wide range of input voltage and load current. The actual ON time and resulting switching frequency varies with the different rising and falling times of the external MOSFETs. The minimum controllable ON time $(t_{\text{ON(MIN)}})$ results in a lower switching frequency than the target switching frequency in high V_{IN} to V_{OUT} ratio applications.

The equation below shows the output-to-input voltage ratio, below which the MIC2128 lowers the switching frequency in order to regulate the output-to-set value.

EQUATION 4-3:

$$\frac{V_{OUT}}{V_{IN}} = t_{ON(MIN)} \times f_{SW}$$

Where:

 V_{OUT} = Output voltage V_{IN} = Input voltage

 f_{SW} = Switching frequency

t_{ON(MIN)} = Minimum controllable ON time (80 ns typ.)

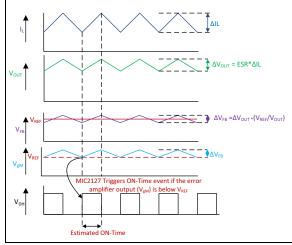


FIGURE 4-1: MIC2128 Control Loop Timing.

Figure 4-2 shows operation of the MIC2128 during load transient. The output voltage drops due to a sudden increase in load, which results in the error amplifier output (V_{gM}) falling below V_{REF} . This causes the comparator to trigger an on-time event. At the end of the ON time, a minimum OFF time t_{OFF(MIN)} is generated to charge the bootstrap capacitor. The next ON time is triggered immediately after the t_{OFF(MIN)} if the error amplifier output voltage (V_{gM}) is still below V_{REF} due to the low feedback voltage. This operation results in higher switching frequency during load transients. The switching frequency returns to the nominal set frequency once the output stabilizes at new load current level. The output recovery time is fast and the output voltage deviation is small in the MIC2128 converter due to the varying duty cycle and switching frequency.

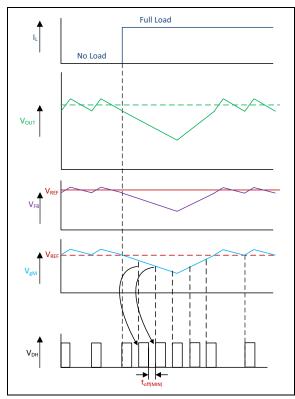


FIGURE 4-2: MIC2128 Load Transient Response.

Unlike true current-mode control, the MIC2128 uses the output voltage ripple to trigger an on-time event. In order to meet the stability requirements, the MIC2128 feedback voltage ripple should be in phase with the inductor current ripple and large enough to be sensed by the internal error amplifier. The recommended feedback voltage ripple is 20 mV~100 mV over the full input voltage range. If a low-ESR output capacitor is selected, then the feedback voltage ripple may be too small to be sensed by the internal error amplifier. Also, the output voltage ripple and the feedback voltage ripple are not necessarily in phase with the inductor

current ripple if the ESR of the output capacitor is very low. For these applications, ripple injection is required to ensure proper operation. Refer to **Section 5.8** "Ripple Injection" for details about the ripple injection technique.

4.2 Soft Start (SS)

Soft Start reduces the power supply inrush current at start-up by controlling the output voltage rise time. The MIC2128 features SS pin which allows the user to set the soft-start time by connecting a capacitor from the SS pin to $A_{GND}.$ An internal current source of 1.3 μA charges this capacitor and generates a linear voltage which is used as the reference for the internal error amplifier during Soft Start. Once the voltage on this SS capacitor is above the internal fixed reference of 0.6V, the error amplifier uses the fixed 0.6V as reference instead of the voltage on the external SS capacitor.

4.3 Current Limit (I_{LIM})

The MIC2128 uses the low-side MOSFET $R_{DS(ON)}$ to sense inductor current. In each switching cycle of the MIC2128 converter, the inductor current is sensed by monitoring the voltage across the low-side MOSFET during the OFF period of the switching cycle during which low-side MOSFET is ON. An internal current source of 96 μA generates a voltage across the external current limit setting resistor R_{CL} as show in the Figure 4-3.

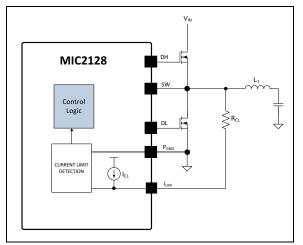


FIGURE 4-3: MIC2128 Current Limiting Circuit.

The I_{LIM} pin voltage (V_{ILIM}) is the difference of the voltage across the low-side MOSFET and the voltage across the resistor (V_{CL}). The sensed voltage V_{ILIM} is compared with the power ground (P_{GND}) after a blanking time of 150 ns.

If the absolute value of the voltage drop across the low-side MOSFET is greater than the absolute value of the voltage across the current setting resistor (V_{CL}), the MIC2128 triggers the current limit event. Consecutive

eight current limit events trigger the hiccup mode. Once the controller enters into hiccup mode, it initiates a soft-start sequence after a hiccup timeout of 4 ms (typical). Both the high-side and low-side MOSFETs are turned off during hiccup timeout. The hiccup sequence including the soft start reduces the stress on the switching FETs and protects the load and supply from severe short conditions.

The current limit can be programmed by using the following Equation 4-4.

EQUATION 4-4:

$$R_{CL} = \frac{\left(I_{CLIM} + \frac{\varDelta IL_{PP}}{2}\right) \times R_{DS(ON)} + V_{OFFSET}}{I_{CL}}$$

Where:

I_{LIM} = Load current limit

R_{DS (ON)} = On-resistance of low-side power MOSFET

 ΔI_{LPP} = Inductor peak-to-peak ripple current

V_{OFFSET} = Current-limit comparator offset (15 mV max.)

 I_{CL} = Current-limit source current (96 μ A typ)

Since MOSFET $R_{DS(ON)}$ varies from 30% to 40% with temperature, it is recommended to consider the $R_{DS(ON)}$ variation while calculating R_{CL} in the above equation to avoid false current limiting due to increased MOSFET junction temperature rise. It is also recommended to connect SW pin directly to the drain of the low-side MOSFET to accurately sense the MOSFETs $R_{DS(ON)}$.

To improve the current limit variation, the MIC2128 adjusts the internal current limit source current (I_{CL}) at a rate of 0.3 μ A/°C when the MIC2128 junction temperature changes to compensate the $R_{DS(ON)}$ variation of external low-side MOSFET. The effectiveness of this method depends on the thermal gradient between the MIC2128 and the external low-side MOSFET. The lower the thermal gradient, the better the current limit variation.

A small capacitor (C_{CL}) can be connected from the I_{LIM} pin to PGND to filter the switch node ringing during the Off-time allowing a better current sensing. The time constant of R_{CL} and C_{CL} should be less than the minimum off time.

4.4 Negative Current Limit

The MIC2128 implements negative current limit by sensing the SW voltage when the low-side FET is ON. If the SW node voltage exceeds 48 mV typical, the device turns off the low-side FET for 500 ns. Negative current limit value is shown in Equation 4-5.

EQUATION 4-5:

$$I_{NLIM} = \frac{48mV}{R_{DS(ON)}}$$

Where:

I_{NLIM} = Negative current limit

 $R_{DS(ON)}$ = On-resistance of low-side power MOSFET

4.5 High-Side MOSFET Gate Drive (DH)

The MIC2128's high-side drive circuit is designed to switch an N-Channel external MOSFET. The MIC2128 Functional Block diagram shows a bootstrap diode between PVDD and BST pins. This circuit supplies energy to the high-side drive circuit. A low ESR ceramic capacitor should be connected between BST and SW pins (refer Typical Application Circuit). The capacitor between BST and SW pins, C_{BST} , is charged while the low-side MOSFET is on. When the high-side MOSFET driver is turned on, energy from C_{BST} is used to turn the MOSFET on. A minimum of 0.1 μF low ESR ceramic capacitor is recommended between BST and SW pins. The required value of C_{BS} can be calculated using the following Equation 4-6.

EQUATION 4-6:

$$C_{BST} = \frac{Q_{G_HS}}{\Delta V_{RST}}$$

Where:

 $Q_{G\ HS}$ = High-side MOSFET total gate charge

 ΔV_{BST} = Drop across the CBST,

generally 50 mV to 100 mV

A small resistor in series with CBST, can be used to slow down the turn-on time of the high-side N-channel MOSFET.

4.6 Low-Side MOSFET Gate Drive (DL)

The MIC2128's low-side drive circuit is designed to switch an N-Channel external MOSFET. The internal low-side MOSFET driver is powered by PVDD. Connect a minimum of 4.7 μ F low-ESR ceramic capacitor to supply the transient gate current of the external MOSFET.

4.7 Auxiliary Bootstrap LDO (EXTVDD)

The MIC2128 features an auxiliary bootstrap LDO which improves the system efficiency by supplying the MIC2128 internal circuit bias power and gate drivers from the converter output voltage. This LDO is enabled when the voltage on the EXTVDD pin is above 4.6V (typical) and at the same time the main LDO which operates from $V_{\mbox{\scriptsize IN}}$ is disabled to reduce power consumption.

5.0 APPLICATIONS INFORMATION

5.1 Setting the Switching Frequency

The MIC2128 is an adjustable-frequency, synchronous buck controller featuring a unique adaptive on-time control architecture. The switching frequency can be adjusted between 270 kHz and 800 kHz by changing the resistor divider network between V_{IN} and A_{GND} pins consisting of R_1 and R_2 as shown in Figure 5-1.

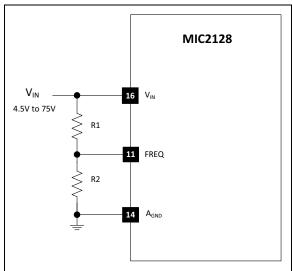


FIGURE 5-1: Switching Frequency Adjustment.

Equation 5-1 shows the estimated switching frequency:

EQUATION 5-1:

$$f_{SW_ADJ} = f_O \times \frac{R_2}{R_1 + R_2}$$

 f_O is the switching frequency when R_1 is 100 $k\Omega$ and R_2 being open; f_O is typically 800 kHz. For more precise setting, it is recommended to use Figure 5-2:

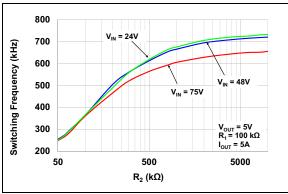


FIGURE 5-2: Switching Frequency vs. R₂.

5.2 Output Voltage Setting

The output voltage can be adjusted using a resistor divider from output to A_{GND} whose mid-point is connected to FB pin as shown the Figure 5-3.

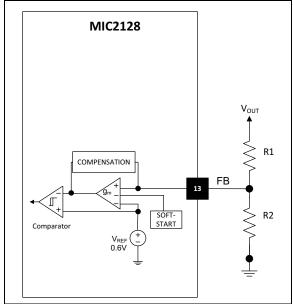


FIGURE 5-3: Output Voltage Adjustment.

The output voltage can be calculated using Equation 5-2:

EQUATION 5-2:

$$V_{OUT} = V_{REF} \times \left(I + \frac{R_I}{R_2}\right)$$
 Where:
$$V_{REF} = 0.6 V$$

The maximum output voltage that can be programmed using the MIC2128 is limited to 30V, if not limited by the maximum duty cycle (see Equation 4-2).

A typical value of R_1 is less than 30 k Ω . If R_1 is too large, it may allow noise to be introduced into the voltage feedback loop and also increases the offset between the set output voltage and actual output voltage because of the error amplifier bias current. If R_1 is too small in value, it will decrease the efficiency of the power supply, especially at light loads. Once R_1 is selected, R_2 can be calculated using Equation 5-3.

EQUATION 5-3:

$$R_2 = \frac{R_I}{\frac{V_{OUT}}{V_{REF}} - I}$$

5.3 Setting the Soft-Start Time

The output Soft-Start time can be set by connecting a capacitor from SS to A_{GND} from 2 ms to 100 ms as shown in Figure 5-4.

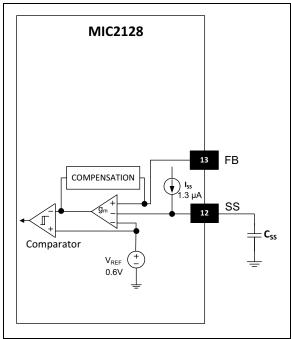


FIGURE 5-4: Setting the Soft-Start Time.

The value of the capacitor can be calculated using Equation 5-4.

EQUATION 5-4:

 $C_{SS} = \frac{I_{SS} \times t_{SS}}{V_{REF}}$ Where: $C_{SS} = \text{Capacitor from SS pin to A}_{GND}$ $I_{SS} = \text{Internal Soft-Start current (1.3 μA typical)}$ $t_{SS} = \text{Output Soft-Start time}$ $V_{REF} = 0.6V$

5.4 MOSFET Selection

Important parameters for MOSFET selection are:

- · Voltage rating
- On-resistance
- · Total gate charge

The voltage rating for the high-side and low-side MOSFETs are essentially equal to the power stage input voltage V_{IN} . A safety factor of 30% should be added to the $V_{IN(MAX)}$ while selecting the voltage rating of the MOSFETs to account for voltage spikes due to circuit parasitic elements.

5.4.1 HIGH-SIDE MOSFET POWER LOSSES

The total power loss in the high-side MOSFET (P_{HSFET}) is the sum of the power losses because of conduction ($P_{CONDUCTION}$), switching (P_{SW}), reverse recovery charge of low-side MOSFET body diode (P_{Qrr}) and MOSFET's output capacitance discharge as calculated in the Equation 5-5.

EQUATION 5-5:

$$P_{HSFET} = P_{CONDUCTION(HS)} + P_{SW(HS)} + P_{Qrr} + P_{COSS}$$

$$P_{CONDUCTION(HS)} = (I_{RMS(HS)})^2 \times R_{DS(ON_HS)}$$

$$P_{SW(HS)} = 0.5 \times V_{IN} \times I_{LOAD} \times (t_R + t_F) \times f_{SW}$$

$$P_{Qrr} = V_{IN} \times Q_{rr} \times f_{SW}$$

$$P_{COSS} = \frac{1}{2} \times (C_{OSS(HS)} + C_{OSS(HS)}) \times (V_{IN})^2 \times f_{SW}$$
Where:
$$R_{DS(ON_HS)} = \text{On-resistance of the high-side MOSFET}$$

$$V_{IN} = \text{Operating input voltage}$$

$$I_{LOAD} = \text{Load current}$$

$$f_{SW} = \text{Operating switching frequency}$$

$$Q_{rr} = \text{Reverse recovery charge of low-side MOSFET body diode or of external diode across low-side MOSFET}$$

$$C_{OSS(HS)} = \text{Effective high-side MOSFET output capacitance}$$

$$C_{OSS(LS)} = \text{Effective low-side MOSFET output capacitance}$$

$$I_{RMS(HS)} = \text{RMS current of the high-side MOSFET which can be calculated using Equation 5-6.}$$

$$t_{R, t_F} = \text{The high-side MOSFET turn-on and turn-off transition times which can be approximated by Equation 5-8 and Equation 5-9}$$

EQUATION 5-6:

$$I_{RMS(HS)} = I_{LOAD} \times \sqrt{D}$$

 I_{LOAD} is the load current and D is the operating duty cycle, given by Equation 5-7.

EQUATION 5-7:

$$D = \frac{V_{OUT}}{V_{IN}}$$

EQUATION 5-8:

$$t_R = \frac{Q_{SW(HS)} \times [R_{DH(PULL_UP)} + R_{HS(GATE)}]}{V_{DD} - V_{TH}}$$

EQUATION 5-9:

$$t_F \, = \, \frac{Q_{SW(HS)} \times [R_{DH(PULL_DOWN)} + R_{HS(GATE)}]}{V_{TH}} \label{eq:tf}$$

Where:

 $R_{DH(PULL-UP)}$ = High-side gate driver pull-up

resistance

R_{DH(PULL-DOWN)} = High-side gate driver pull-down resistance

resistano

 $R_{HS(GATE)}$ = High-side MOSFET gate resistance

V_{TH} = Gate threshold voltage of the

high-side MOSFET

 Switching gate charge of the high-side MOSFET which can be approximated by Equation 5-10.

EQUATION 5-10:

$$Q_{SW(HS)} \,=\, \frac{Q_{GS(HS)}}{2} + Q_{GD(HS)}$$

Where:

Q_{SW(HS)}

 $Q_{GS(HS)}$ = High-side MOSFET gate to source

charge

 $Q_{GD(HS)}$ = High-side MOSFET gate to drain charge

5.4.2 LOW-SIDE MOSFET POWER LOSSES

The total power loss in the low-side MOSFET (P_{LSFET}) is the sum of the power losses because of conduction ($P_{CONDUCTION(LS)}$) and body diode conduction during the dead time (P_{DT}) as calculated in Equation 5-11.

EQUATION 5-11:

$$\begin{split} P_{LSFET} &= P_{CONDUCTION(LS)} + P_{DT} \\ P_{CONDUCTION(LS)} &= \left(I_{RMS(LS)}\right)^2 \times R_{DS(ON_LS)} \end{split}$$

$$P_{DT} = 2 \times V_F \times I_{LOAD} \times t_{DT} \times f_{SW}$$

Where:

 $R_{DS(ON\ LS)}$ = On-resistance of the low-side MOSFET

 V_F = Low-side MOSFET body diode forward

voltage drop

 t_{DT} = Dead time which is approximately 20 ns

 f_{SW} = Switching Frequency

I_{RMS(LS)} = RMS current of the low-side MOSFET which can be calculated using

Equation 5-12

EQUATION 5-12:

$$I_{RMS(LS)} \; = \; I_{LOAD} \times \sqrt{1-D}$$

 $\ensuremath{I_{LOAD}}$ is the load current and D is the operating duty cycle.

5.5 Inductor Selection

Inductance value, saturation and RMS currents are required to select the output inductor. The input and output voltages and the inductance value determine the peak-to-peak inductor ripple current.

The lower the inductance value, the higher the peak-to-peak ripple current through the inductor, which increases the core losses in the inductor. Higher inductor ripple current also requires more output capacitance to smooth out the ripple current. The greater the inductance value, the lower the peak-to-peak ripple current, which results in a larger and more expensive inductor.

A good compromise between size, loss and cost is to set the inductor ripple current to be equal to 30% of the maximum output current.

The inductance value is calculated by Equation 5-13:

EQUATION 5-13:

$$L = \frac{V_{OUT} \times (V_{IN} - V_{OUT})}{V_{IN} \times f_{SW} \times 0.3 \times I_{FL}}$$

Where:

V_{IN} = Input voltage

 f_{SW} = Switching frequency I_{FL} = Full load current V_{OLIT} = Output voltage

For a selected Inductor, the peak-to-peak inductor ripple current ripple can be calculated using Equation 5-14.

EQUATION 5-14:

$$\varDelta I_{L_PP} \; = \; \frac{V_{OUT} \times (V_{IN} - V_{OUT})}{V_{IN} \times f_{SW} \times L}$$

The peak inductor current is equal to the load current plus one half of the peak-to-peak inductor current ripple which is shown in Equation 5-15.

EQUATION 5-15:

$$I_{L_PK} = I_{LOAD} + \frac{\Delta I_{L_PP}}{2}$$

MIC2128

The RMS and saturation current ratings of the selected inductor should be at least equal to the RMS current and saturation current calculated in the Equation 5-16 and Equation 5-17.

EQUATION 5-16:

$$I_{L_RMS} = \sqrt{\left(I_{LOAD(MAX)}\right)^2 + \frac{\left(\Delta I_{L_PP}\right)^2}{12}}$$

Where:

 $I_{LOAD(MAX)}$ = Maximum load current

EQUATION 5-17:

$$I_{L_SAT} = \frac{R_{CL} \times I_{CL} + 15mV}{R_{DS(ON)}}$$

Where:

R_{CL} = Current limit resistor

 I_{CL} = Current-Limit Source Current (96 μ A typical)

 $R_{DS (ON)}$ = On-resistance of low-side power MOSFET

Maximizing the efficiency requires the proper selection of core material and minimizing the winding resistance. Use of ferrite materials is recommended in the higher switching frequency applications. Lower cost iron powder cores may be used but the increase in core loss reduces the efficiency of the power supply. This is especially noticeable at low output power. The winding resistance decreases efficiency at the higher output current levels. The winding resistance must be minimized although this usually comes at the expense of a larger inductor. The power dissipated in the inductor is equal to the sum of the core and copper losses. At higher output loads, the core losses are usually insignificant and can be ignored. At lower output currents, the core losses can be a significant contributor. Core loss information is usually available from the magnetic's vendor.

The amount of copper loss in the inductor is calculated by Equation 5-18.

EQUATION 5-18:

$$P_{INDUCTOR(CU)} = (I_{L_RMS})^2 \times R_{DCR}$$

5.6 Output Capacitor Selection

The main parameters for selecting the output capacitor are capacitance value, voltage rating and RMS current rating. The type of the output capacitor is usually determined by its equivalent series resistance (ESR). Recommended capacitor types are ceramic, tantalum, low-ESR aluminum electrolytic, OS-CON and POSCAP. The output capacitor ESR also affects the control loop from a stability point of view. The maximum value of ESR can be calculated using Equation 5-19.

EQUATION 5-19:

$$ESR \le \frac{\Delta V_{OUT_PP}}{\Delta I_{L_PP}}$$

Where:

 ΔV_{OUT_PP} = Peak-to-peak output voltage ripple $\Delta I_{L\ PP}$ = Peak-to-peak inductor current ripple

The required output capacitance to meet steady state output ripple can be calculated using Equation 5-20.

EQUATION 5-20:

$$C_{OUT} = \frac{\Delta I_{L_PP}}{8 \times f_{SW} \times \Delta V_{OUT_PP}}$$

Where:

 C_{OUT} = Output capacitance value f_{SW} = Switching frequency

As described in Section 4.1 "Theory of Operation", the MIC2128 requires at least 20 mV peak-to-peak ripple at the FB pin to ensure that the gm amplifier and the comparator behave properly. Also, the output voltage ripple should be in phase with the inductor current. Therefore, the output voltage ripple caused by the output capacitor's value should be much smaller than the ripple caused by the output capacitor ESR. If low-ESR capacitors, such as ceramic capacitors, are selected as the output capacitors, a ripple injection circuit should be used to provide the enough feedback-voltage ripple. Refer to the Section 5.8 "Ripple Injection" for details.

The voltage rating of the capacitor should be twice the output voltage for a tantalum and 20% greater for aluminum electrolytic, ceramic or OS-CON. The output capacitor RMS current is calculated in Equation 5-21.

EQUATION 5-21:

$$I_{C_OUT(RMS)} = \frac{\Delta I_{L_PP}}{\sqrt{12}}$$

The power dissipated in the output capacitor is shown in Equation 5-22.

EQUATION 5-22:

$$P_{DIS(C_OUT)} = (I_{C_OUT(RMS)})^2 \times ESR_{C_OUT}$$

5.7 Input Capacitor Selection

The input capacitor reduces peak current drawn from the power supply and reduces noise and voltage ripple on the input. The input voltage ripple depends on the input capacitance and ESR. The input capacitance and ESR values can be calculated using Equation 5-23.

EQUATION 5-23:

$$C_{IN} = \frac{I_{LOAD} \times D \times (1-D)}{\eta \times f_{SW} \times \Delta V_{IN_C}}$$

$$ESR_{C_IN} = \frac{\Delta V_{IN_ESR}}{I_{L_PK}}$$

Where:

I_{LOAD} = Load Current

I_{L PK} = Peak Inductor Current

 ΔV_{INC} = Input ripple due to capacitance

 ΔV_{INESR} = Input ripple due to input capacitor ESR

η = Power conversion efficiency

The input capacitor should be rated for ripple current rating and voltage rating. The RMS value of input capacitor current is determined at the maximum output current. The RMS current rating of the input capacitor should be greater than or equal to the input capacitor RMS current calculated using the Equation 5-24.

EQUATION 5-24:

$$I_{C_IN(RMS)} \, = \, I_{LOAD(MAX)} \times \sqrt{D \times (1-D)}$$

The power dissipated in the input capacitor is calculated using Equation 5-25.

EQUATION 5-25:

$$P_{DISS(C\ IN)} = (I_{C\ IN(RMS)})^2 \times ESR_{C\ IN}$$

5.8 Ripple Injection

The minimum recommended ripple at the FB pin for proper operation of the MIC2128 error amplifier and comparator is 20 mV. However, the output voltage ripple is generally designed as 1% to 2% of the output voltage. For low output voltages, such as a 1V, the output voltage ripple is only 10 mV to 20 mV, and the feedback voltage ripple is less than 20 mV. If the feedback voltage ripple is so small that the gm amplifier and comparator cannot sense it, then the MIC2128 loses control and the output voltage is not regulated. In order to have sufficient $V_{\rm FB}$ ripple, ripple injection method should be applied for low output voltage ripple applications.

The applications are divided into three situations according to the amount of the feedback voltage ripple:

 Enough ripple at the feedback due to the large ESR of the output capacitor (Figure 5-5). The converter is stable without any additional ripple injection at the FB node. The feedback voltage ripple is given by Equation 5-26.

EQUATION 5-26:

$$\Delta V_{FB(PP)} = \frac{R_2}{R_2 + R_1} \times ESR \times \Delta I_{L_PP}$$

 ΔI_{L_PP} is the peak-to-peak value of the inductor current ripple.

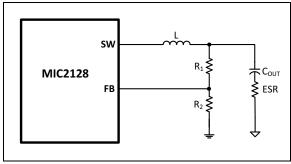


FIGURE 5-5: Enough Ripple at FB.

2. Inadequate ripple at the feedback voltage due to the small ESR of the output capacitor.

The output voltage ripple can be fed into the FB pin through a feed forward capacitor, C_{FF} in this case, as shown in Figure 5-6. The typical C_{FF} value is between 1 nF and 100 nF. With the feed forward capacitor, the feedback voltage ripple is very close to the output voltage ripple which is shown in Equation 5-27.

EQUATION 5-27:

$$\Delta V_{FB(PP)} = ESR \times \Delta I_{L_PP}$$

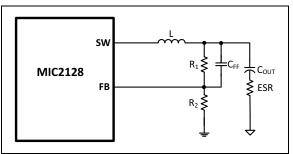


FIGURE 5-6:

Inadequate Ripple at FB.

3. Virtually no ripple at the FB pin voltage due to the very-low ESR of the output capacitors:

In this case, additional ripple can be injected into the FB pin from the switching node SW via a resistor R_{INJ} and a capacitor C_{INJ} , as shown in Figure 5-7.

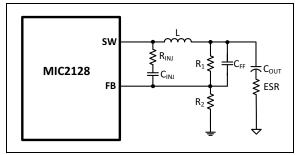


FIGURE 5-7:

Invisible Ripple at FB.

The injected ripple at the FB pin in this case is given by the Equation 5-28:.

EQUATION 5-28:

$$\varDelta V_{FB(PP)} = \frac{V_{OUT} \times (1-D)}{C_{FF} \times R_{INJ} \times f_{SW}}$$

In the above Equation 5-28, it is assumed that the time constant associated with the C_{FF} meets the criteria shown in Equation 5-29.

EQUATION 5-29:

$$\tau \geq T_{SW}$$

$$\tau \geq C_{FF} \times (R_1 || R_2 || R_{INJ})$$

The process of sizing the ripple injection resistor and capacitors is:

- Select C_{INJ} in the range of 47 nF to 100 nF, which can be considered as short for a wide range of the frequencies.
- 2. Select C_{FF} in the range of 0.47 nF to 10 nF, if R_1 and R_2 are in $k\Omega$ range.
- 3. Select R_{IN.I} according to Equation 5-30.

EQUATION 5-30:

$$R_{INJ} = \frac{V_{OUT} \times (I - D)}{C_{FF} \times f_{SW} \times \Delta V_{FB(PP)}}$$

Where:

V_{OUT} = Output voltage D = Duty cycle

 f_{SW} = Switching frequency $\Delta V_{FB}(pp)$ = Feedback Ripple

Once all the ripple injection component values are calculated, ensure that the criteria shown in the Equation 5-29 is met.

5.9 Power Dissipation in MIC2128

The MIC2128 features two Low Dropout Regulators (LDOs) to supply power at the P_{VDD} pin from either V_{IN} or EXTVDD depending on the voltage at the EXTVDD pin. P_{VDD} powers MOSFET drivers and V_{DD} pin, which is recommended to connect to P_{VDD} through a low pass filter, powers the internal circuitry. In the applications where the output voltage is 5V and above (up to 14V), it is recommended to connect EXTVDD to the output to reduce the power dissipation in the MIC2128, to reduce the MIC2128 junction temperature and to improve the system efficiency.

The power dissipation in the MIC2128 depends on the internal LDO being in use, gate charge of the external MOSFETs and switching frequency. The power dissipation and the junction temperature of the MIC2128 can be estimated using the Equation 5-31, Equation 5-32 and Equation 5-33.

Power dissipation in the MIC2128 when EXTVDD is not used:

EQUATION 5-31:

$$P_{IC} = V_{IN} \times (I_{SW} + I_Q)$$

Power dissipation in the MIC2128 when EXTVDD is used:

EQUATION 5-32:

$$\begin{split} P_{IC} &= V_{EXTVDD} \times (I_{SW} + I_Q) \\ I_{SW} &= Q_G \times f_{SW} \\ Q_G &= Q_{G \ HS} + Q_{G \ LS} \end{split}$$

Where:

I_{SW} = Switching current into the V_{IN} pin

 I_Q = Quiescent current (1.4 mA typ)

 ${
m Q_G}$ = Total gate charge of the external MOS-FETs which is sum of the gate charge of high-side MOSFET (${
m Q_{G-HS}}$) and the low-side MOSFET (${
m Q_{G-LS}}$) at 5V gate to source voltage. Gate charge information can be obtained from the MOSFETs

 $\mbox{datasheet.} \\ \mbox{V}_{\mbox{EXTVDD}} \ \ \, = \ \, \mbox{Voltage at the EXTVDD pin} \\ \label{eq:velocity}$

 $(4.6 \le V_{EXTVDD} \le 14 \text{ V typ.})$

The junction temperature of the MIC2128 can be estimated using Equation 5-33.

EQUATION 5-33:

$$T_J = (P_{IC} \times \theta_{JA}) + T_A$$

Where:

 T_J = Junction temperature P_{IC} = Power dissipation

 θ_{JA} = Junction Ambient Thermal resistance (50.8°C/W)

The maximum recommended operating junction temperature for the MIC2128 is 125°C.

Using the output voltage of the same switching regulator, when it is in between 4.6V (typ.) to 14V, as the voltage at the EXTVDD pin, significantly reduces the power dissipation inside the MIC2128. This reduces the junction temperature rise as illustrated below.

For the typical case of V_{VIN} = 48V, V_{OUT} = 5V, the maximum ambient temperature = 85°C and 10 mA of I_{SW} .

The condition where EXTVDD is not used is shown in Equation 5-34:

EQUATION 5-34:

$$P_{IC} = 48V \times (10mA + 1.5mA)$$

 $P_{IC} = 0.552W$
 $T_J = (0.552W \times 50.8 \,^{\circ}C/W) + 85 \,^{\circ}C$
 $T_J = 113 \,^{\circ}C$

When the 5V output is used as the input to the EXT-VDD pin, the MIC2128 junction temperature reduces from 113°C to 88°C as calculated in Equation 5-35:

EQUATION 5-35:

$$\begin{split} P_{IC} &= 5V \times (10mA + 1.5mA) \\ P_{IC} &= 0.058W \\ T_{J} &= (0.058W \times 50.8 \, ^{\circ}\!C/W) + 85 \, ^{\circ}\!C \\ T_{J} &= 88 \, ^{\circ}\!C \end{split}$$

6.0 PCB LAYOUT GUIDELINES

PCB layout is critical to achieve reliable, stable and efficient performance. The following guidelines should be followed to ensure proper operation of the MIC2128converter.

6.1 IC

- The ceramic bypass capacitors, which are connected to the V_{DD} and P_{VDD} pins, must be located right at the IC. Use wide traces to connect to the V_{DD} , P_{VDD} and A_{GND} , P_{GND} pins respectively.
- The signal ground pin (A_{GND}) must be connected directly to the ground planes.
- Place the IC close to the point-of-load (POL).
- Signal and power grounds should be kept separate and connected at only one location.

6.2 Input Capacitor

- Place the input ceramic capacitors as close as possible to the MOSFETs.
- Place several vias to the ground plane close to the input capacitor ground terminal.

6.3 Inductor

- Keep the inductor connection to the switch node (SW) short.
- Do not route any digital lines underneath or close to the inductor.
- Keep the switch node (SW) away from the feedback (FB) pin.
- The SW pin should be connected directly to the drain of the low-side MOSFET to accurately sense the voltage across the low-side MOSFET.

6.4 Output Capacitor

- Use a copper plane to connect the output capacitor ground terminal to the input capacitor ground terminal.
- The feedback trace should be separate from the power trace and connected as close as possible to the output capacitor. Sensing a long high-current load trace can degrade the DC load regulation.

6.5 MOSFETs

- MOSFET gate drive traces must be short and wide. The ground plane should be the connection between the MOSFET source and PGND.
- Chose a low-side MOSFET with a high CGS/CGD ratio and a low internal gate resistance to minimize the effect of d_v/d_t inducted turn-on.
- Use a 4.5V V_{GS} rated MOSFET. Its higher gate threshold voltage is more immune to glitches than a 2.5V or 3.3V rated MOSFET.

7.0 PACKAGING INFORMATION

7.1 Package Marking Information

16-Pin QFN (3 x 3 mm)



Example



Legend: XX...X Customer-specific information

WW Week code (week of January 1 is week '01')

NNN Alphanumeric traceability code

e3 Pb-free JEDEC designator for Matte Tin (Sn)

This package is Pb-free. The Pb-free JEDEC designator (@3) can be found on the outer packaging for this package.


•, ▲, ▼ Pin one index is identified by a dot, delta up, or delta down (triangle mark).

Note: In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information. Package may or may not include the corporate logo.

Underbar (_) symbol may not be to scale.

TITLE

16 LEAD QFN 3x3mm PACKAGE OUTLINE & RECOMMENDED LAND PATTERN

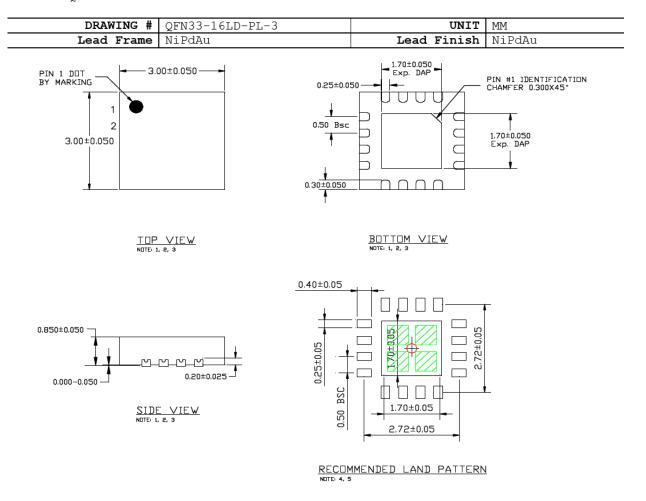

NOTE:

- 1. MAX PACKAGE WARPAGE IS 0.05mm.
- 2. MAX ALLOWABLE BURR IS 0.076mm IN ALL DIRECTIONS
- 3. PIN #1 IS ON TOP WILL BE LASER MARKED.
- 4. RED CIRCLE IN LAND PATTERN INDICATES THERMAL VIA. SIZE SHOULD BE 0.30-0.35mm IN DIAMETER AND SHOULD BE CONNECTED TO GND FOR MAX THERMAL PERFORMANCE.
- 5. GREEN RECTANGLES (SHADED AREA) indicate SOLDER STENCIL OPENING ON EXPOSED PAD AREA. SIZE SHOULD BE 0.60x0.60mm IN SIZE, 0.20mm SPACING.

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging.

APPENDIX A: REVISION HISTORY

Revision A (September 2016)

• Original release of this document.

PRODUCT IDENTIFICATION SYSTEM

 $\underline{\text{To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.}\\$

PART NO.	<u>X</u>	<u>xx</u>	Example	s:	
Device	Temperature	Package Code	a) MIC212	8YML:	Synchronous Buck Controller, -40°C to +125°C junction temperature range, 16LD QFN package
Device:		chronous Buck Controller Featuring Control with External Soft Start			
Temperature:		e with Industrial Temperature Grade to +125°C)			
Package:	ML = 16-Lea	ad, 3x3 mm QFN			

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.

QUALITY MANAGEMENT SYSTEM CERTIFIED BY DNV = ISO/TS 16949 ==

Trademarks

The Microchip name and logo, the Microchip logo, AnyRate, dsPIC, FlashFlex, flexPWR, Heldo, JukeBlox, KeeLoq, KeeLoq logo, Kleer, LANCheck, LINK MD, MediaLB, MOST, MOST logo, MPLAB, OptoLyzer, PIC, PICSTART, PIC32 logo, RightTouch, SpyNIC, SST, SST Logo, SuperFlash and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

ClockWorks, The Embedded Control Solutions Company, ETHERSYNCH, Hyper Speed Control, HyperLight Load, IntelliMOS, mTouch, Precision Edge, and QUIET-WIRE are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BodyCom, chipKIT, chipKIT logo, CodeGuard, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming, ICSP, Inter-Chip Connectivity, JitterBlocker, KleerNet, KleerNet logo, MiWi, motorBench, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PureSilicon, RightTouch logo, REAL ICE, Ripple Blocker, Serial Quad I/O, SQI, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

 $\ensuremath{\mathsf{SQTP}}$ is a service mark of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

GestIC is a registered trademarks of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2016, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

ISBN: 978-1-5224-0922-9



Worldwide Sales and Service

AMERICAS

Corporate Office 2355 West Chandler Blvd. Chandler, AZ 85224-6199 Tel: 480-792-7200

Fax: 480-792-7277 Technical Support:

http://www.microchip.com/support

Web Address: www.microchip.com

Atlanta Duluth, GA

Tel: 678-957-9614 Fax: 678-957-1455

Austin, TX Tel: 512-257-3370

Boston

Westborough, MA Tel: 774-760-0087 Fax: 774-760-0088

Chicago Itasca, IL

Tel: 630-285-0071 Fax: 630-285-0075

Cleveland

Independence, OH Tel: 216-447-0464 Fax: 216-447-0643

Dallas

Addison, TX Tel: 972-818-7423 Fax: 972-818-2924

Detroit Novi, MI

Tel: 248-848-4000

Houston, TX Tel: 281-894-5983

Indianapolis Noblesville, IN

Tel: 317-773-8323 Fax: 317-773-5453

Los Angeles

Mission Viejo, CA Tel: 949-462-9523 Fax: 949-462-9608

New York, NY Tel: 631-435-6000

San Jose, CA Tel: 408-735-9110

Canada - Toronto Tel: 905-695-1980 Fax: 905-695-2078

ASIA/PACIFIC

Asia Pacific Office Suites 3707-14, 37th Floor

Tower 6, The Gateway Harbour City, Kowloon

Hong Kong Tel: 852-2943-5100

Fax: 852-2401-3431

Australia - Sydney Tel: 61-2-9868-6733 Fax: 61-2-9868-6755

China - Beijing

Tel: 86-10-8569-7000 Fax: 86-10-8528-2104

China - Chengdu Tel: 86-28-8665-5511 Fax: 86-28-8665-7889

China - Chongqing Tel: 86-23-8980-9588 Fax: 86-23-8980-9500

China - Dongguan Tel: 86-769-8702-9880

China - Guangzhou Tel: 86-20-8755-8029

China - Hangzhou Tel: 86-571-8792-8115 Fax: 86-571-8792-8116

China - Hong Kong SAR Tel: 852-2943-5100 Fax: 852-2401-3431

China - Nanjing Tel: 86-25-8473-2460 Fax: 86-25-8473-2470

China - Qingdao Tel: 86-532-8502-7355

Fax: 86-532-8502-7205 **China - Shanghai** Tel: 86-21-5407-5533

Fax: 86-21-5407-5066

China - Shenyang Tel: 86-24-2334-2829 Fax: 86-24-2334-2393

China - Shenzhen Tel: 86-755-8864-2200 Fax: 86-755-8203-1760

China - Wuhan Tel: 86-27-5980-5300 Fax: 86-27-5980-5118

China - Xian Tel: 86-29-8833-7252 Fax: 86-29-8833-7256

ASIA/PACIFIC

China - Xiamen Tel: 86-592-2388138 Fax: 86-592-2388130

China - Zhuhai Tel: 86-756-3210040 Fax: 86-756-3210049

India - Bangalore Tel: 91-80-3090-4444 Fax: 91-80-3090-4123

India - New Delhi Tel: 91-11-4160-8631 Fax: 91-11-4160-8632

India - Pune Tel: 91-20-3019-1500

Japan - Osaka Tel: 81-6-6152-7160 Fax: 81-6-6152-9310

Japan - Tokyo Tel: 81-3-6880- 3770 Fax: 81-3-6880-3771

Korea - Daegu Tel: 82-53-744-4301 Fax: 82-53-744-4302

Korea - Seoul Tel: 82-2-554-7200 Fax: 82-2-558-5932 or 82-2-558-5934

Malaysia - Kuala Lumpur Tel: 60-3-6201-9857 Fax: 60-3-6201-9859

Malaysia - Penang Tel: 60-4-227-8870 Fax: 60-4-227-4068

Philippines - Manila Tel: 63-2-634-9065 Fax: 63-2-634-9069

Singapore Tel: 65-6334-8870 Fax: 65-6334-8850

Taiwan - Hsin Chu Tel: 886-3-5778-366 Fax: 886-3-5770-955

Taiwan - Kaohsiung Tel: 886-7-213-7828

Taiwan - Taipei Tel: 886-2-2508-8600 Fax: 886-2-2508-0102

Thailand - Bangkok Tel: 66-2-694-1351 Fax: 66-2-694-1350

EUROPE

Austria - Wels Tel: 43-7242-2244-39 Fax: 43-7242-2244-393

Denmark - Copenhagen Tel: 45-4450-2828 Fax: 45-4485-2829

France - Paris Tel: 33-1-69-53-63-20 Fax: 33-1-69-30-90-79

Germany - Dusseldorf Tel: 49-2129-3766400

Germany - Karlsruhe Tel: 49-721-625370

Germany - Munich Tel: 49-89-627-144-0 Fax: 49-89-627-144-44

Italy - Milan Tel: 39-0331-742611 Fax: 39-0331-466781

Italy - Venice Tel: 39-049-7625286

Netherlands - Drunen Tel: 31-416-690399 Fax: 31-416-690340

Poland - Warsaw Tel: 48-22-3325737

Spain - Madrid Tel: 34-91-708-08-90 Fax: 34-91-708-08-91

Sweden - Stockholm Tel: 46-8-5090-4654

UK - Wokingham Tel: 44-118-921-5800 Fax: 44-118-921-5820

06/23/16