

FEATURES

5-input, 1-output HDMI transceiver

HDMI support

3 GHz video support (up to 4k × 2k)

Audio return channel (ARC)

3D TV support

Content type bits

CEC 1.4-compatible

Extended colorimetry

Character- and icon-based on-screen display (OSD)

3D OSD overlay on all mandatory 3D formats

Support for OSD overlay on 3 GHz video formats

High-bandwidth Digital Content Protection (HDCP 1.4)

HDCP repeater support: up to 127 KSVs supported

300 MHz maximum TMDS clock frequency (up to 4k × 2k)

48-/36-/30-bit Deep Color input modes supported

Ultralow jitter digital PLL (100% deskew)

TTL pixel port input

Allows digital video input to facilitate analog video support

Interlaced-to-progressive converter

HDMI receiver for 5 input ports

3 GHz support on all inputs

Adaptive equalizer for cable lengths up to 30 meters

Flexible internal EDID RAM supports dual EDIDs

Replication of either dual EDID on any input port

5 V detect inputs

Hot Plug assert control outputs

HDMI transmitter

3 GHz support on transmitter outputs

EDID data extraction

Hot Plug detect (HPD) inputs

Audio return channel (ARC) receiver

3 GHz color space converter (CSC)

Audio

HDMI-compatible audio interface

8-channel audio extraction port

8-channel audio insertion port

S/PDIF (IEC 60958-compatible) digital audio input/output

Super Audio CD® (SACD) with DSD input/output interface

High bit rate (HBR) audio

Dolby® TrueHD

DTS-HD Master Audio™

Full audio input and output support

General

Interrupt controller

Standard identification (STDI) circuit

Software libraries, driver, and application available

APPLICATIONS

AVR

HTiB

Soundbar with HDMI repeater support

Other repeater applications

FUNCTIONAL BLOCK DIAGRAM

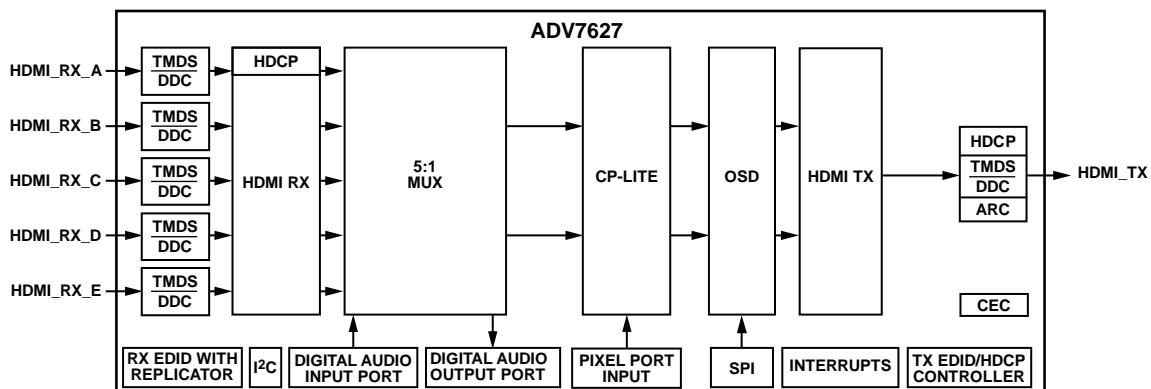


Figure 1.

11833-001

Rev. 0

Document Feedback

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.

Tel: 781.329.4700

©2013 Analog Devices, Inc. All rights reserved.

Technical Support

www.analog.com

TABLE OF CONTENTS

| | | | |
|---|----|-----------------------------------|----|
| Features | 1 | Power Supply Recommendations..... | 21 |
| Applications..... | 1 | Power-Up Sequence | 21 |
| Functional Block Diagram | 1 | Power-Down Sequence..... | 21 |
| Revision History | 2 | Theory of Operation | 22 |
| General Description | 3 | HDMI Receiver..... | 22 |
| Detailed Functional Block Diagram | 4 | HDCP Repeater Functionality | 22 |
| Specifications..... | 5 | Digital Audio Ports | 22 |
| Digital, HDMI, and AC Specifications | 5 | On-Screen Display | 22 |
| Data and I ² C Timing Characteristics..... | 6 | Pixel Port Input..... | 22 |
| Power Specifications | 12 | HDMI Transmitter | 22 |
| Absolute Maximum Ratings..... | 14 | I ² C Interface | 22 |
| Package Thermal Performance..... | 14 | Other Features | 22 |
| ESD Caution..... | 14 | Outline Dimensions | 23 |
| Pin Configuration and Function Descriptions..... | 15 | Ordering Guide | 23 |

REVISION HISTORY

12/13—Revision 0: Initial Version

GENERAL DESCRIPTION

The [ADV7627](#) is a high performance, five-input, one-output, High-Definition Multimedia Interface (HDMI®) transceiver. The [ADV7627](#) supports 3 GHz video and features one HDMI receiver, one HDMI transmitter, an audio output port, an audio input port, and a pixel port input. The [ADV7627](#) supports all HDCP repeater functions through fully tested Analog Devices, Inc., repeater software libraries and drivers.

The HDMI receiver and transmitter in the [ADV7627](#) support the reception and transmission of 3 GHz video formats up to 4k × 2k at 24 Hz/25 Hz/30 Hz, in addition to all mandatory HDMI 3D TV formats. The receiver and transmitter also provide support for THX® Media Director™.

The HDMI receiver features an integrated equalizer that ensures robust operation of the interface with cable lengths up to 30 meters. The HDMI receiver has a 768-byte volatile extended display identification data (EDID) memory, which can facilitate one or two EDIDs. Each HDMI port features dedicated 5 V detect and Hot Plug™ assert pins.

The HDMI transmitter supports audio return channel (ARC) and features an integrated HDMI CEC controller that supports capability discovery and control (CDC).

The [ADV7627](#) offers an audio output port and an audio input port. Each audio port supports the extraction and insertion of up to eight channels of audio data out of or into the HDMI streams. HDMI audio formats, including I²S, S/PDIF, direct stream digital (DSD), and high bit rate (HBR) audio are supported.


The [ADV7627](#) features a TTL pixel port input that facilitates the reception of digital video data from an analog front-end decoder (for example, the [ADV7180](#), [ADV7181D](#), or [ADV7842](#)).

The [ADV7627](#) has an integrated on-screen display (OSD) generator that enables the creation and control of high quality character- and icon-based system status and control displays. The OSD can be overlaid on 3 GHz video formats and 3D video. Customers who are interested in using OSD are provided with Blimp, the Analog Devices OSD development tool.

The [ADV7627](#) is provided in a space-saving, 260-ball, 15 mm × 15 mm CSP_BGA surface-mount, RoHS-compliant package and is specified over the 0°C to 70°C temperature range.

DETAILED FUNCTIONAL BLOCK DIAGRAM

1833-002

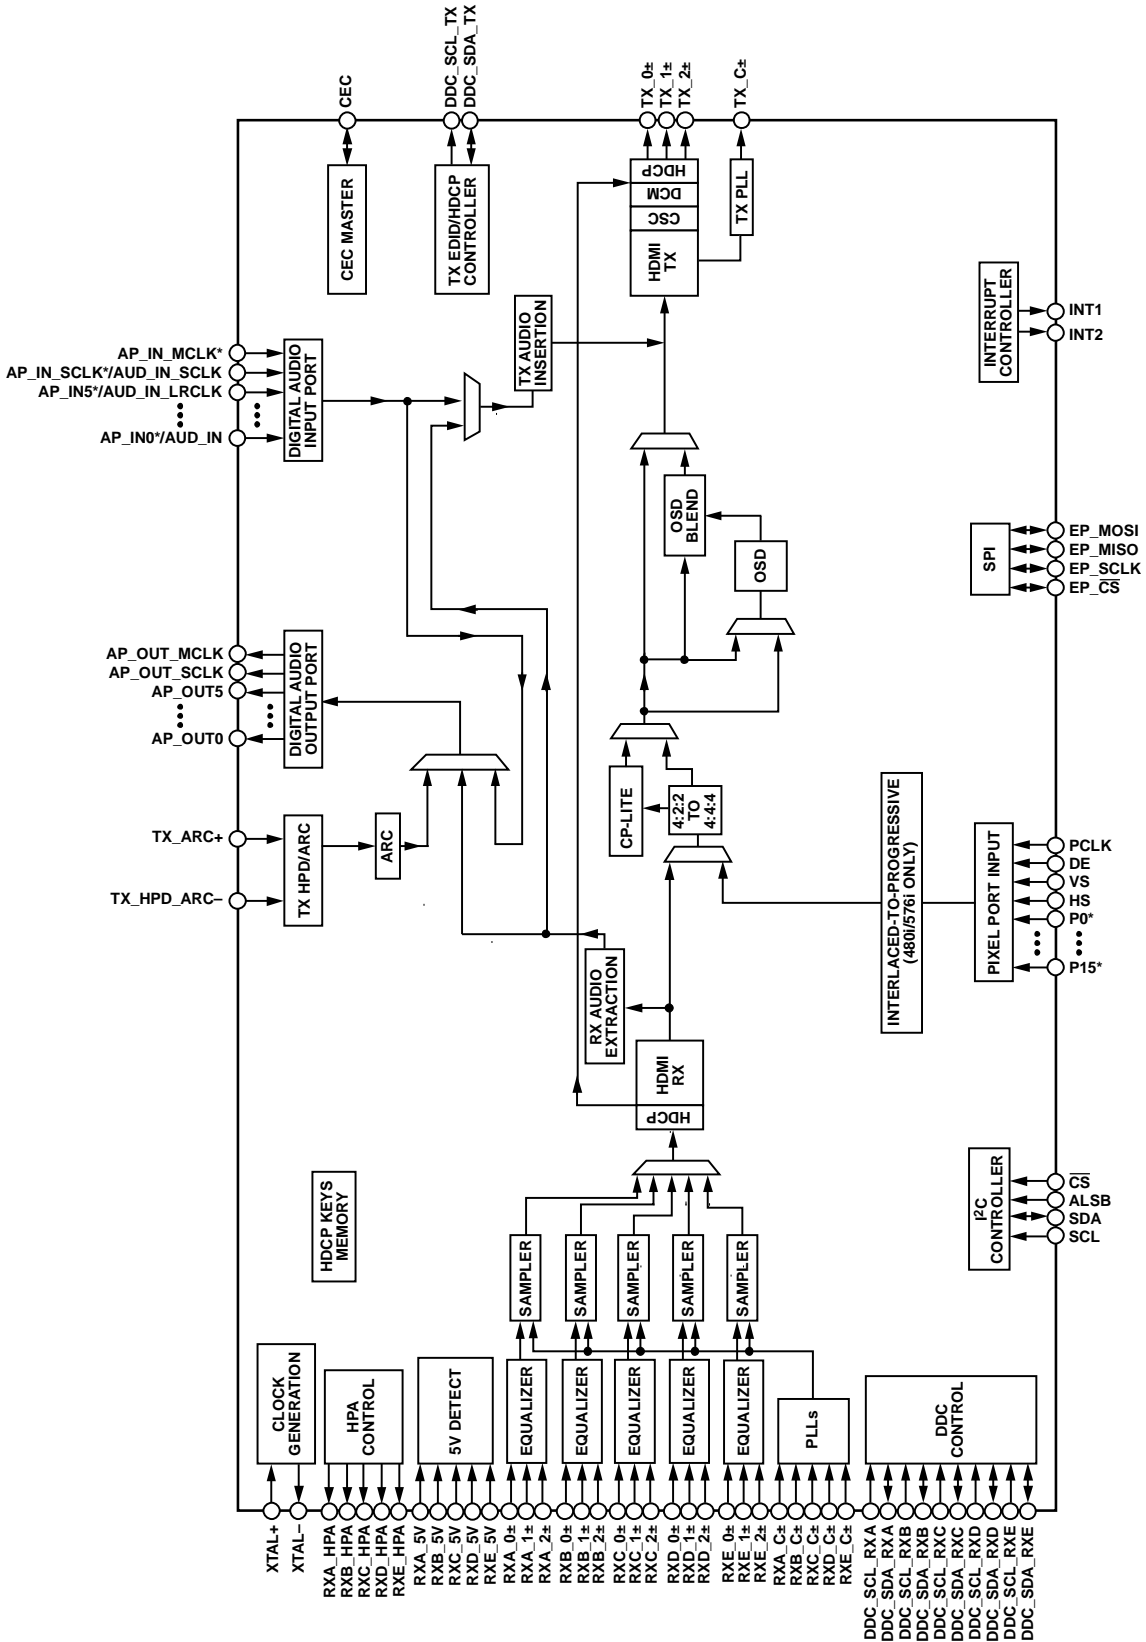

*PINS FOR PIXEL PORT INPUT SIGNALS P15 TO P8 ARE SHARED WITH AP_IN AUDIO INPUT PORT PINS.

Figure 2. Detailed Functional Block Diagram

SPECIFICATIONS

AVDD_TX = 1.8 V ± 5%, CVDD = 1.8 V ± 5%, DVDD = 1.8 V ± 5%, DVDDIO = 3.3 V ± 5%, PVDD = 1.8 V ± 5%,
PVDD_TX = 1.8 V ± 5%, TVDD = 3.3 V ± 5%, T_{MIN} to T_{MAX} = 0°C to 70°C.

DIGITAL, HDMI, AND AC SPECIFICATIONS

Table 1.

| Parameter | Test Conditions/Comments | Min | Typ | Max | Unit |
|---|---|-------------|-----|-------------|----------|
| DIGITAL INPUTS | | | | | |
| Input High Voltage (V _{IH}) | | 2 | | | V |
| Input Low Voltage (V _{IL}) | | | | 0.8 | V |
| Input Leakage Current (I _{IN}) | | -60 | | +60 | μA |
| Input Capacitance (C _{IN}) | | | | 20 | pF |
| DIGITAL INPUTS (5 V TOLERANT) ¹ | | | | | |
| Input High Voltage (V _{IH}) | | 2.85 | | | V |
| Input Low Voltage (V _{IL}) | | | | 0.8 | V |
| Input Leakage Current (I _{IN}) | RXA_5V, RXB_5V, RXC_5V, RXD_5V, RXE_5V All other 5 V tolerant digital inputs | -450 -60 | | +450 +60 | μA μA |
| DIGITAL OUTPUTS | | | | | |
| Output High Voltage (V _{OH}) | | 2.4 | | | V |
| Output Low Voltage (V _{OL}) | | | | 0.4 | V |
| High Impedance Leakage Current (I _{LEAK}) | | | 10 | | μA |
| Output Capacitance (C _{OUT}) | | | | 20 | pF |
| DIGITAL OUTPUTS (5 V TOLERANT) ² | | | | | |
| Output High Voltage (V _{OH}) | | 4.85 | | | V |
| Output Low Voltage (V _{OL}) | | | | 0.4 | V |
| AC SPECIFICATIONS | | | | | |
| TMDS Input Clock Range | | 25 | | 300 | MHz |
| TMDS Output Clock Frequency | | 25 | | 300 | MHz |

¹ The following pins are 5 V tolerant inputs: DDC_SCL_RXA, DDC_SDA_RXA, DDC_SCL_RXB, DDC_SDA_RXB, DDC_SCL_RXC, DDC_SDA_RXC, DDC_SCL_RXD, DDC_SDA_RXD, DDC_SCL_RXE, DDC_SDA_RXE, RXA_5V, RXB_5V, RXC_5V, RXD_5V, RXE_5V, CEC, DDC_SCL_TX, DDC_SDA_TX, TX_HPD_ARC-, and TX_ARC+.

² The following pins are 5 V tolerant outputs: RXA_HPA, RXB_HPA, RXC_HPA, RXD_HPA, and RXE_HPA.

DATA AND I²C TIMING CHARACTERISTICS

Table 2.

| Parameter | Symbol | Test Conditions/Comments | Min | Typ | Max | Unit |
|--|-----------------------------------|--|---------------------|------|-----------------------|--------------|
| VIDEO SYSTEM CLOCK AND XTAL | | | | | | |
| Crystal Nominal Frequency | | | | 27.0 | | MHz |
| Crystal Frequency Stability | | | | | ±50 | ppm |
| External Clock Source | | External crystal must operate at 1.8 V | | | | |
| Input High Voltage | V _{IH} | XTAL driven with external clock source | 1.2 | | | V |
| Input Low Voltage | V _{IL} | XTAL driven with external clock source | | | 0.4 | V |
| Pixel Port Input Clock Frequency Range | | Interlaced-to-progressive converter not enabled | 13.5 | | 148.5 | MHz |
| | | Interlaced-to-progressive converter enabled (480i, 576i) | | | 13.5 | MHz |
| Serial Port EP_SCLK Frequency | | | | | 27 | MHz |
| Audio SCLK Frequency | | | | | 49.152 | MHz |
| Audio MCLK Frequency | | | | | 98.304 | MHz |
| Audio DSD Clock Frequency | | | | | 5.6448 | MHz |
| RESET FEATURE | | | | | | |
| Reset Pulse Width | | | 5 | | | ms |
| I ² C PORTS (FAST MODE) | | | | | | |
| xCL Frequency ¹ | | | | | 400 | kHz |
| xCL Minimum Pulse Width High ¹ | t ₁ | | 600 | | | ns |
| xCL Minimum Pulse Width Low ¹ | t ₂ | | 1.3 | | | µs |
| Start Condition Hold Time | t ₃ | | 600 | | | ns |
| Start Condition Setup Time | t ₄ | | 600 | | | ns |
| xDA Setup Time ² | t ₅ | | 100 | | | ns |
| xCL and xDA Rise Time ^{1,2} | t ₆ | | | | 300 | ns |
| xCL and xDA Fall Time ^{1,2} | t ₇ | | | | 300 | ns |
| Setup Time (Stop Condition) | t ₈ | | 0.6 | | | µs |
| SERIAL PORT, MASTER MODE ^{3,4} | | SPI Mode 0 | | | | |
| EP_ $\overline{\text{CS}}$ Falling Edge to EP_SCLK Rising/Falling Edge | t ₉ , t ₁₀ | | 1 × EP_SCLK periods | | 1.5 × EP_SCLK periods | ns |
| EP_SCLK Rising/Falling Edge to EP_ $\overline{\text{CS}}$ Rising Edge | t ₁₁ , t ₁₂ | | 1 × EP_SCLK periods | | 1.5 × EP_SCLK periods | ns |
| EP_ $\overline{\text{CS}}$ Pulse Width ⁵ | t ₁₃ | | 1000 | | | ns |
| EP_SCLK High Time | t ₁₄ | | 40 | | 60 | % duty cycle |
| EP_SCLK Low Time | | | 40 | | 60 | % duty cycle |
| EP_MOSI Start of Data Invalid to EP_SCLK Falling Edge | t ₁₅ | | | | 0 | ns |
| EP_ $\overline{\text{CS}}$ Start of Data Invalid to EP_SCLK Falling Edge | t ₁₅ | | | | 0 | ns |
| EP_SCLK Falling Edge to EP_MOSI End of Data Invalid | t ₁₆ | | | | 2.15 | ns |
| EP_SCLK Falling Edge to EP_ $\overline{\text{CS}}$ End of Data Invalid | t ₁₆ | | | | 2.15 | ns |
| EP_MISO Setup Time | t ₁₇ | Valid regardless of the EP_SCLK active edge used | 7.5 | | | ns |
| EP_MISO Hold Time | t ₁₈ | Valid regardless of the EP_SCLK active edge used | 0 | | | ns |

| Parameter | Symbol | Test Conditions/Comments | Min | Typ | Max | Unit |
|--|-----------------|--|-----|----------------------------|-----|--------------|
| SERIAL PORT, SLAVE MODE ^{3,4} | | | | | | |
| EP_ \overline{CS} Falling Edge to EP_SCLK Rising Edge | t ₂₀ | SPI Mode 0 | 10 | | | ns |
| Final EP_SCLK Rising Edge to EP_ \overline{CS} Rising Edge | t ₂₂ | | 10 | | | ns |
| EP_ \overline{CS} Pulse Width ⁵ | t ₂₃ | | | 20 × EP_SCLK periods | | ns |
| EP_SCLK High Time | t ₂₄ | | 45 | | 55 | % duty cycle |
| EP_SCLK Low Time | | | 45 | | 55 | % duty cycle |
| EP_MOSI Setup Time | t ₂₅ | | 0.5 | | | ns |
| EP_MOSI Hold Time | t ₂₆ | | 1.4 | | | ns |
| EP_SCLK Falling Edge to EP_MISO Start of Data Invalid | t ₂₇ | | 5.5 | | | ns |
| EP_SCLK Falling Edge to EP_MISO End of Data Invalid | t ₂₈ | | | | 9 | ns |
| VIDEO DATA AND CONTROL INPUTS | | | | | | |
| PCLK High Time ⁵ | t ₂₉ | | | 0.45 to 0.55 × PCLK period | | % duty cycle |
| PCLK Low Time ⁵ | | | | 0.45 to 0.55 × PCLK period | | % duty cycle |
| Pixel Port Input, Setup Time, SDR and DDR Modes | t ₃₀ | Data latched on rising edge | 1.0 | | | ns |
| Pixel Port Input, Hold Time, SDR and DDR Modes | t ₃₁ | Data latched on rising edge | 1.4 | | | ns |
| Pixel Port Input, Setup Time, DDR Mode | t ₃₂ | Data latched on falling edge | 1.0 | | | ns |
| Pixel Port Input, Hold Time, DDR Mode | t ₃₃ | Data latched on falling edge | 1.4 | | | ns |
| AUDIO INPUT PORT, I ² S INPUT | | | | | | |
| AP_IN_SCLK High Time | t ₃₇ | | 45 | | 55 | % duty cycle |
| AP_IN_SCLK Low Time | | | 45 | | 55 | % duty cycle |
| AP_IN Data Setup Time | t ₃₈ | | 2.3 | | | ns |
| AP_IN Data Hold Time | t ₃₉ | | 1.6 | | | ns |
| AUD_IN_SCLK High Time | t ₃₇ | | 45 | | 55 | % duty cycle |
| AUD_IN_SCLK Low Time | | | 45 | | 55 | % duty cycle |
| AUD_IN Data Setup Time | t ₃₈ | | 1.0 | | | ns |
| AUD_IN Data Hold Time | t ₃₉ | | 3.5 | | | ns |
| AUDIO INPUT PORT, DSD INPUT | | | | | | |
| AP_IN_SCLK High Time | t ₄₀ | | 45 | | 55 | % duty cycle |
| AP_IN_SCLK Low Time | | | 45 | | 55 | % duty cycle |
| AP_IN DSD Data Setup Time | t ₄₁ | | 2.3 | | | ns |
| AP_IN DSD Data Hold Time | t ₄₂ | | 1.6 | | | ns |
| AUDIO OUTPUT PORT, I ² S OUTPUT | | | | | | |
| AP_OUT_SCLK High Time | t ₄₆ | | 45 | | 55 | % duty cycle |
| AP_OUT_SCLK Low Time | | | 45 | | 55 | % duty cycle |
| AP_OUT LRCLK Transition Time | t ₄₇ | Start of invalid LRCLK to falling AP_OUT_SCLK edge | | | 10 | ns |
| AP_OUT LRCLK Transition Time | t ₄₈ | Falling AP_OUT_SCLK edge to end of invalid LRCLK | | | 10 | ns |

| Parameter | Symbol | Test Conditions/Comments | Min | Typ | Max | Unit |
|---------------------------------|----------|---|-----|-----|-----|--------------|
| AP_OUT Data Transition Time | t_{49} | Start of invalid data to falling AP_OUT_SCLK edge | | | 10 | ns |
| AP_OUT Data Transition Time | t_{50} | Falling AP_OUT_SCLK edge to end of invalid data | | | 10 | ns |
| AUDIO OUTPUT PORT, DSD OUTPUT | | | | | | |
| AP_OUT_SCLK High Time | t_{51} | | 45 | | 55 | % duty cycle |
| AP_OUT_SCLK Low Time | | | 45 | | 55 | % duty cycle |
| AP_OUT DSD Data Transition Time | t_{52} | Start of invalid data to falling AP_OUT_SCLK edge | | | 10 | ns |
| AP_OUT DSD Data Transition Time | t_{53} | Falling AP_OUT_SCLK edge to end of invalid data | | | 10 | ns |

¹ xCL refers to SCL, DDC_SCL_RXA, DDC_SCL_RXB, DDC_SCL_RXC, DDC_SCL_RXD, and DDC_SCL_RXE.
² xDA refers to SDA, DDC_SDA_RXA, DDC_SDA_RXB, DDC_SDA_RXC, DDC_SDA_RXD, and DDC_SDA_RXE.
³ SPI Mode 0 only.
⁴ All serial port measurements are for CPHA = 0, CPOL = 0 (clock is low in idle state; negative edge of clock is used to transmit data and positive edge is used to sample data).
⁵ Measurements guaranteed by design only.

Timing Diagrams

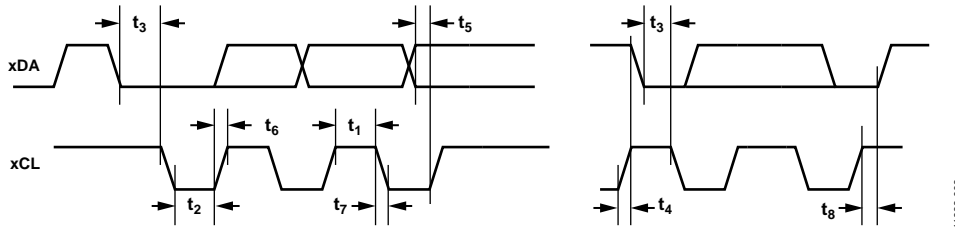


Figure 3. I²C Timing

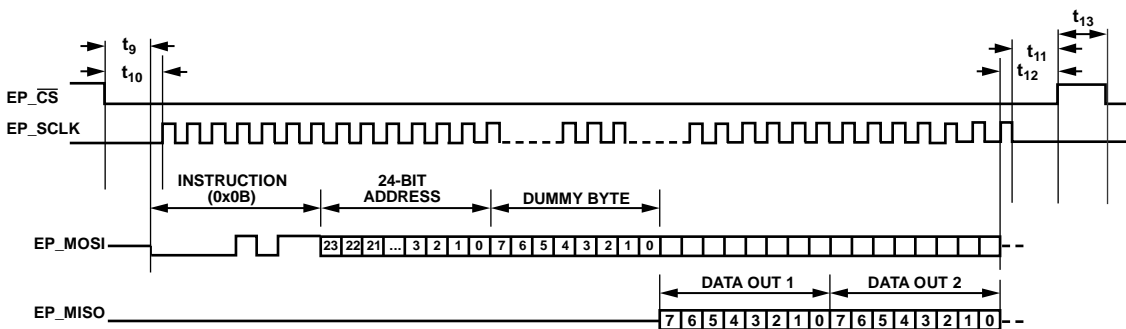


Figure 4. Detailed SPI Master Timing Diagram (SPI Mode 0, CPOL = CPHA = 0)

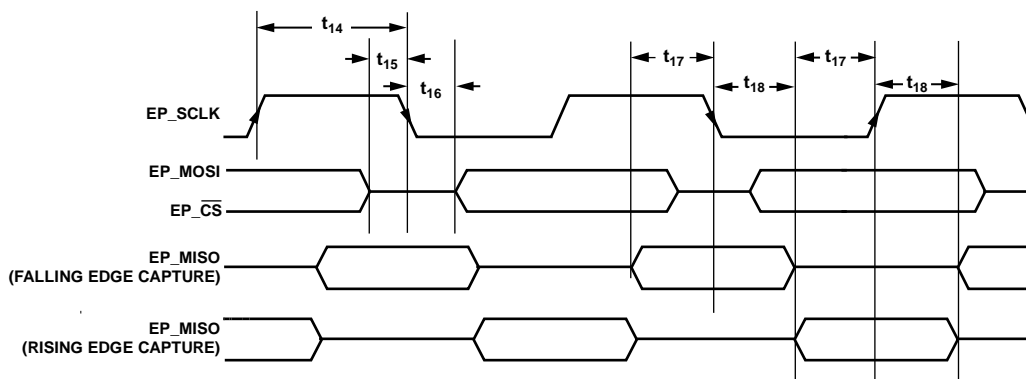


Figure 5. SPI Master Mode Timing (SPI Mode 0)

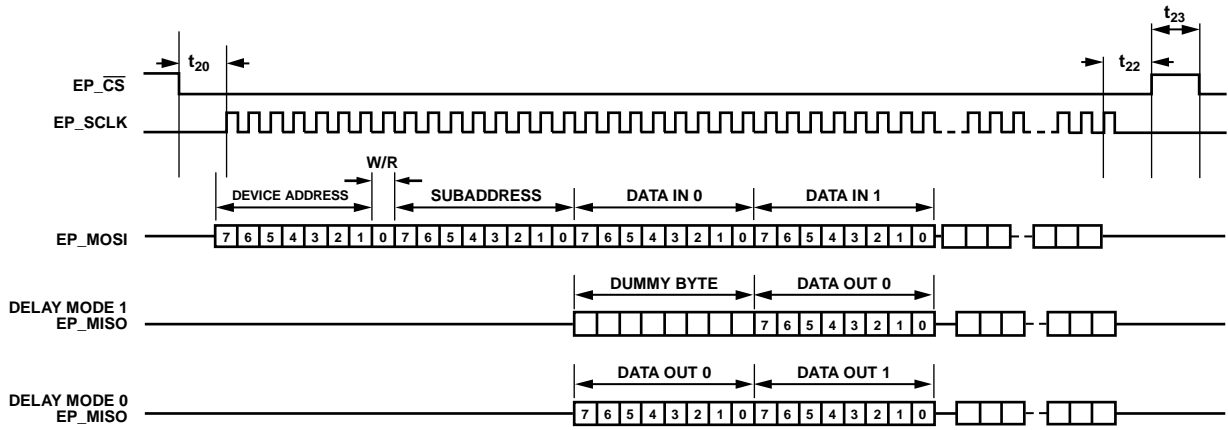


Figure 6. Detailed SPI Slave Timing Diagram (SPI Mode 0, CPOL = CPHA = 0)

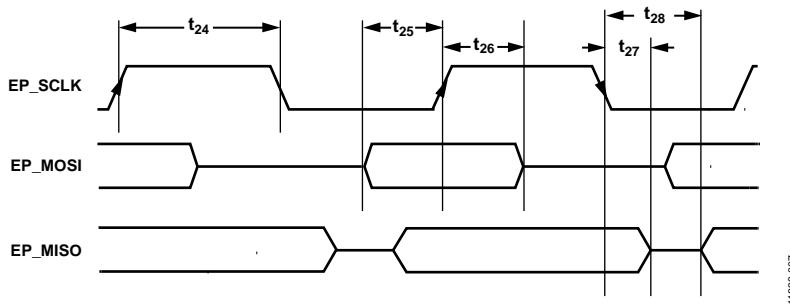


Figure 7. SPI Slave Mode Timing (SPI Mode 0)

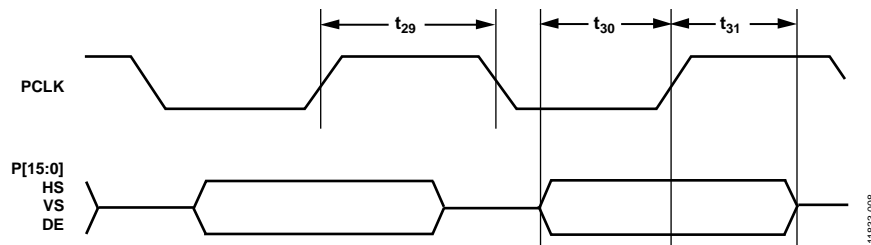


Figure 8. Pixel Port Input, Noninterleaved SDR Video Data and Control Timing


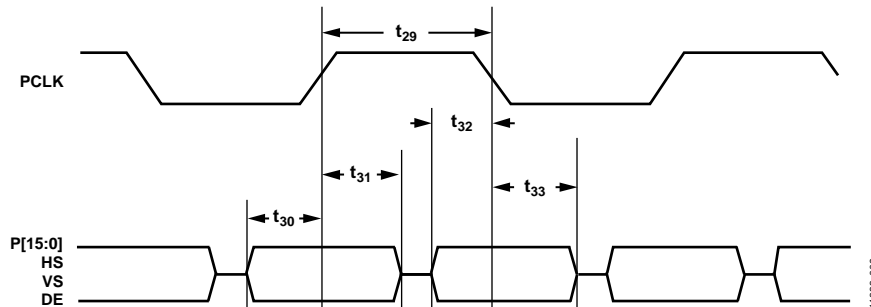


Figure 9. Pixel Port Input, Noninterleaved DDR Video Data and Control Timing

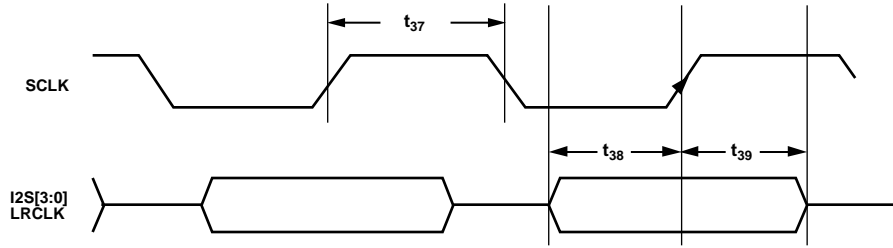

AUDIO INPUT PORTS I²S SIGNAL ASSIGNMENT


| INPUT PORT | SCLK | LRCLK | I ² S[3:0] |
|------------|-------------|--------------|---------------------------------|
| AUD_IN | AUD_IN_SCLK | AUD_IN_LRCLK | AUD_IN (I ² S0 ONLY) |
| AP_IN | AP_IN_SCLK | AP_IN5 | AP_IN[4:1] |

NOTES

1. AUD_IN PORT NOT AVAILABLE WHEN AP_IN PORT USED.
2. AP_IN PORT NOT AVAILABLE WHEN PIXEL PORT INPUT USED.


11833-012

Figure 10. I²S Input Timing

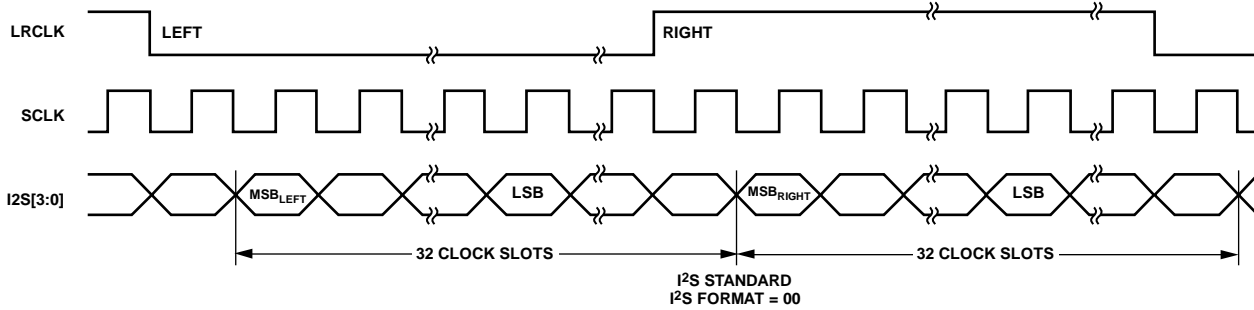

11833-013

Figure 11. I²S Standard Audio, Data Width 16 to 24 Bits per Channel

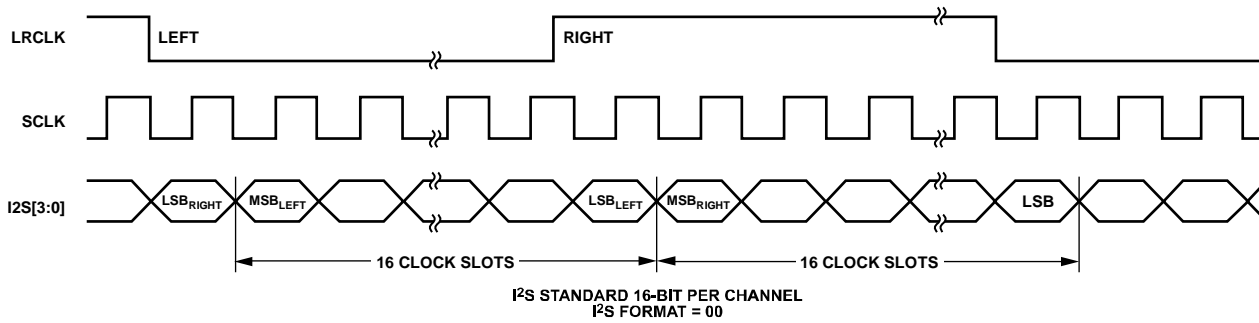

11833-014

Figure 12. I²S Standard Audio, 16-Bit Samples Only

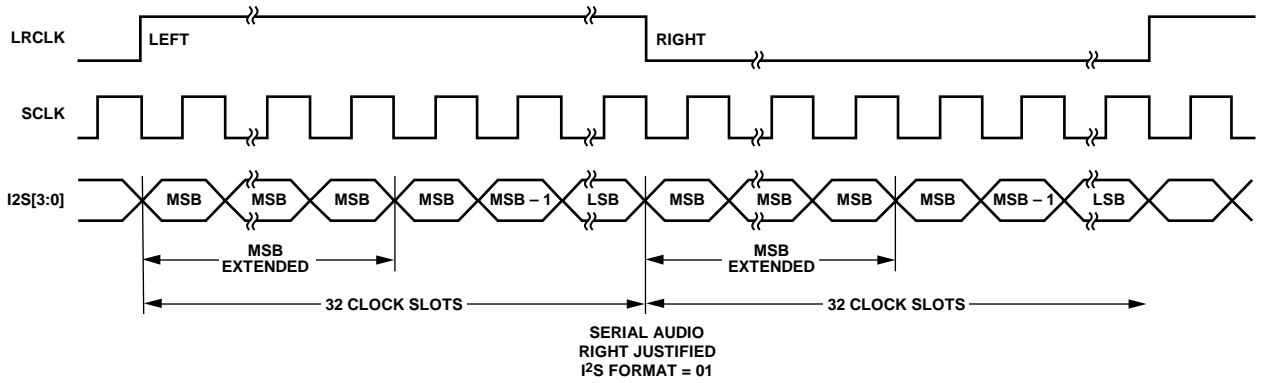


Figure 13. Serial Audio, Right-Justified

11833-015

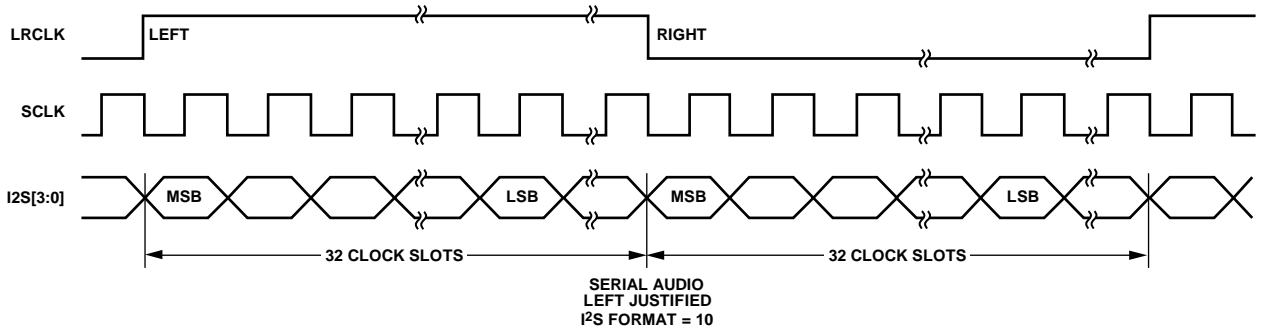


Figure 14. Serial Audio, Left-Justified

11833-016

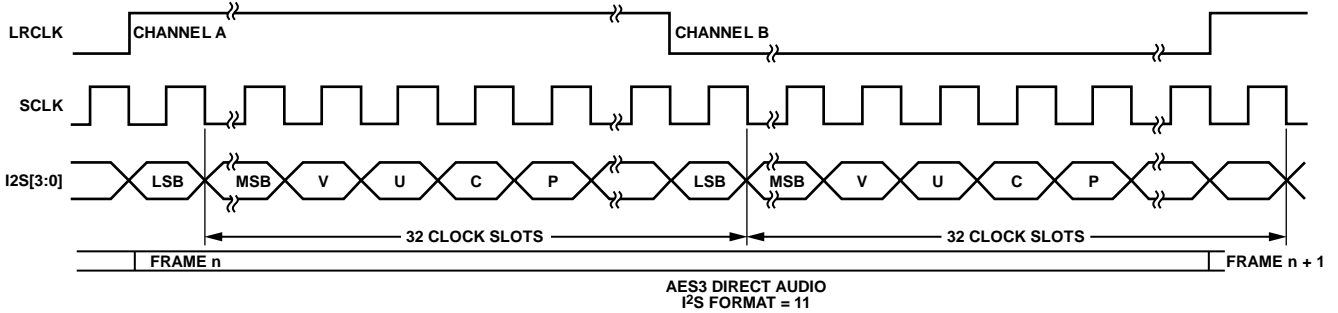


Figure 15. AES3 Direct Audio

11833-017


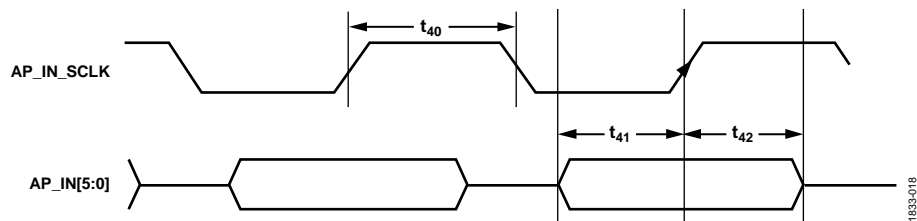


Figure 16. DSD Input Timing


11833-018

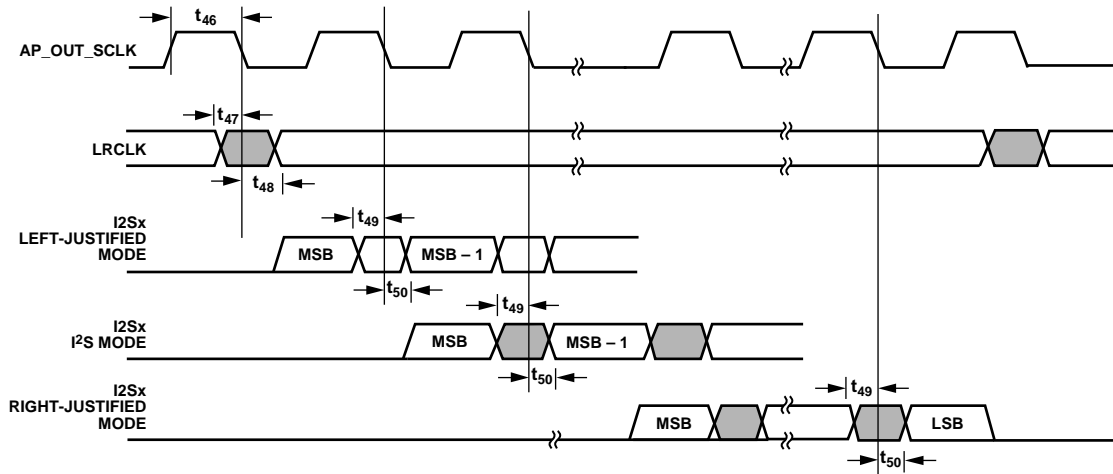

NOTES
 1. LRCLK IS A SIGNAL ACCESSIBLE VIA AP_OUT5.
 2. I2Sx ARE SIGNALS ACCESSIBLE VIA AP_OUT1 TO AP_OUT4.

11833-020

Figure 17. I2S Output Timing

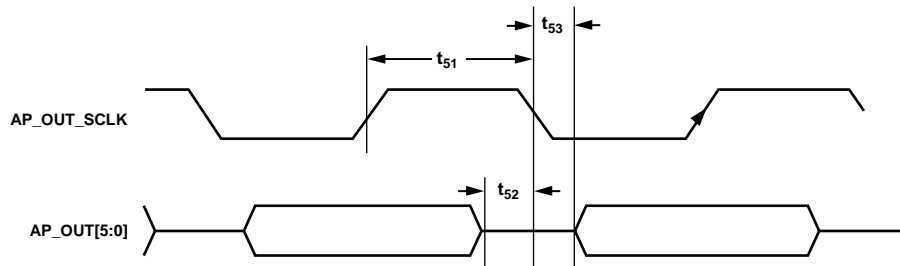

11833-021

Figure 18. DSD Output Timing

POWER SPECIFICATIONS

Table 3.

| Parameter | Symbol | Min | Typ | Max | Unit |
|--|----------------------|------|------|------|------|
| POWER SUPPLIES | | | | | |
| HDMI Tx Analog Power Supply | AVDD_TX | 1.71 | 1.8 | 1.89 | V |
| Comparator Power Supply | CVDD | 1.71 | 1.8 | 1.89 | V |
| Digital Power Supply | DVDD | 1.71 | 1.8 | 1.89 | V |
| Digital I/O Power Supply | DVDDIO | 3.14 | 3.3 | 3.46 | V |
| PLL Power Supply | PVDD | 1.71 | 1.8 | 1.89 | V |
| HDMI Tx PLL Power Supply | PVDD_TX | 1.71 | 1.8 | 1.89 | V |
| Termination Power Supply | TVDD | 3.14 | 3.3 | 3.46 | V |
| CURRENT CONSUMPTION—MUX MODE^{1, 2} | | | | | |
| HDMI Tx Analog Power Supply | I _{AVDD_TX} | | 24 | | mA |
| Comparator Power Supply | I _{CVDD} | | 96.5 | | mA |
| Digital Core Power Supply | I _{DVDD} | | 173 | | mA |
| Digital I/O Power Supply | I _{DVDDIO} | | 1.5 | | mA |
| PLL Power Supply | I _{PVDD} | | 34 | | mA |
| HDMI Tx PLL Power Supply | I _{PVDD_TX} | | 70 | | mA |
| Termination Power Supply | I _{TVDD} | | 113 | | mA |

| Parameter | Symbol | Min | Typ | Max | Unit |
|--|----------------------|-----|------|--------|------|
| CURRENT CONSUMPTION—AUDIO INSERT MODE^{1, 3} | | | | | |
| HDMI Tx Analog Power Supply | I _{AVDD_TX} | | 26 | | mA |
| Comparator Power Supply | I _{CVDD} | | 184 | | mA |
| Digital Core Power Supply | I _{DVDD} | | 216 | | mA |
| Digital I/O Power Supply | I _{DVDDIO} | | 0.05 | | mA |
| PLL Power Supply | I _{PVDD} | | 64.1 | | mA |
| HDMI Tx PLL Power Supply | I _{PVDD_TX} | | 71 | | mA |
| Termination Power Supply | I _{TVDD} | | 116 | | mA |
| CURRENT CONSUMPTION—POWER-DOWN MODE 0^{1, 4} | | | | | |
| HDMI Tx Analog Power Supply | I _{AVDD_TX} | | 1.30 | | mA |
| Comparator Power Supply | I _{CVDD} | | 0.84 | | mA |
| Digital Core Power Supply | I _{DVDD} | | 0.25 | | mA |
| Digital I/O Power Supply | I _{DVDDIO} | | 0.21 | | mA |
| PLL Power Supply | I _{PVDD} | | 0.02 | | mA |
| HDMI Tx PLL Power Supply | I _{PVDD_TX} | | 0.10 | | mA |
| Termination Power Supply | I _{TVDD} | | 0.14 | | mA |
| CURRENT CONSUMPTION—POWER-DOWN MODE 1^{1, 5} | | | | | |
| HDMI Tx Analog Power Supply | I _{AVDD_TX} | | 1.90 | | mA |
| Comparator Power Supply | I _{CVDD} | | 0.84 | | mA |
| Digital Core Power Supply | I _{DVDD} | | 0.95 | | mA |
| Digital I/O Power Supply | I _{DVDDIO} | | 0.21 | | mA |
| PLL Power Supply | I _{PVDD} | | 0.02 | | mA |
| HDMI Tx PLL Power Supply | I _{PVDD_TX} | | 0.10 | | mA |
| Termination Power Supply | I _{TVDD} | | 0.14 | | mA |
| CURRENT CONSUMPTION—EXAMPLE MAXIMUM OPERATING MODE^{1, 6} | | | | | |
| HDMI Tx Analog Power Supply | I _{AVDD_TX} | | | 31.00 | mA |
| Comparator Power Supply | I _{CVDD} | | | 213.00 | mA |
| Digital Core Power Supply | I _{DVDD} | | | 255.00 | mA |
| Digital I/O Power Supply | I _{DVDDIO} | | | 0.20 | mA |
| PLL Power Supply | I _{PVDD} | | | 75.00 | mA |
| HDMI Tx PLL Power Supply | I _{PVDD_TX} | | | 82.00 | mA |
| Termination Power Supply | I _{TVDD} | | | 127.00 | mA |

¹ Data recorded during lab characterization. Typical current consumption values are recorded with nominal voltage supply levels and at room temperature.

² ADV7627 configured in mux mode with one active HDMI Rx input and the HDMI Tx output in use. 4k × 2k at 30 Hz video format with pseudo random test pattern applied to the active HDMI Rx input port. HDMI Rx termination closed on the active HDMI Rx input port and open on the unused HDMI Rx input ports. HDMI Tx source termination enabled.

³ ADV7627 configured in audio insert mode with one active HDMI Rx input and the HDMI Tx output in use. Audio inserted on HDMI Tx output from the AP_IN input port. HBR audio used. No audio extraction. 4k × 2k at 30 Hz video format with pseudo random test pattern applied to the active HDMI Rx input port. HDMI Rx port termination closed on the active HDMI Rx input port and open on the unused HDMI Rx input ports. HDMI Tx source termination enabled. OSD not enabled.

⁴ ADV7627 configured in Power-Down Mode 0. In Power-Down Mode 0, all blocks are powered down except for the I²C slave.

⁵ ADV7627 configured in Power-Down Mode 1. In Power-Down Mode 1, all blocks are powered down except for the I²C slave and the CEC (to monitor wake-up interrupts).

⁶ ADV7627 configured in an example maximum operating mode with one active HDMI Rx input and the HDMI Tx output in use. HBR audio from the active HDMI Rx input inserted on the HDMI Tx output. No audio extraction. 4k × 2k at 30 Hz video format with pseudo random test pattern applied to the active HDMI Rx input port. HDMI Rx port termination closed on the active HDMI Rx input port and open on the unused HDMI Rx input ports. HDMI Tx source termination enabled. OSD not enabled. Maximum current consumption values recorded with maximum power supply levels at device maximum operating temperature.

ABSOLUTE MAXIMUM RATINGS

Table 4.

| Parameter | Rating |
|--|---|
| AVDD_TX to GND | 2.2 V |
| CVDD to GND | 2.2 V |
| DVDD to GND | 2.2 V |
| PVDD to GND | 2.2 V |
| PVDD_TX to GND | 2.2 V |
| DVDDIO to GND | 4.0 V |
| TVDD to GND | 4.0 V |
| Digital Inputs Voltage to GND | GND – 0.3 V to DVDDIO + 0.3 V up to a maximum of 4.0 V |
| 5 V Tolerant Digital Inputs to GND ¹ | 5.5 V |
| Digital Outputs Voltage to GND | GND – 0.3 V to DVDDIO + 0.3 V up to a maximum of 4.0 V |
| XTAL+, XTAL– Pins | –0.3 V to PVDD + 0.3 V |
| Maximum Junction Temperature (T _{JMAX}) | 125°C |
| Storage Temperature Range | –65°C to +150°C |
| Infrared Reflow, Soldering (20 sec) | 260°C |

¹ The following inputs are 5 V tolerant: DDC_SCL_RXA, DDC_SDA_RXA, DDC_SCL_RXB, DDC_SDA_RXB, DDC_SCL_RXC, DDC_SDA_RXC, DDC_SCL_RXD, DDC_SDA_RXD, DDC_SCL_RXE, DDC_SDA_RXE, RXA_5V, RXB_5V, RXC_5V, RXD_5V, RXE_5V, CEC, DDC_SCL_TX, DDC_SDA_TX, TX_HPD_ARC–, and TX_ARC+.

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

PACKAGE THERMAL PERFORMANCE

To reduce power consumption when using the [ADV7627](#), the user is advised to turn off unused sections of the device.

Due to printed circuit board (PCB) metal variation and, therefore, variation in PCB heat conductivity, the value of θ_{JA} may differ for various PCBs. The most efficient measurement solution is obtained using the package surface temperature to estimate the die temperature because this solution eliminates the variance associated with the θ_{JA} value.

The maximum junction temperature (T_{JMAX}) of 125°C must not be exceeded. The following equation calculates the junction temperature using the measured package surface temperature and applies only when no heat sink is used on the device under test (DUT):

$$T_J = T_S + (\Psi_{JT} \times W_{TOTAL})$$

where:

T_S is the package surface temperature (°C).

$\Psi_{JT} = 0.41^\circ\text{C}/\text{W}$ for the 260-ball CSP_BGA (based on 2s2p test board defined in the JEDEC specification).

$$W_{TOTAL} = ((PVDD \times I_{PVDD}) + (PVDD_TX \times I_{PVDD_TX}) + (TVDD \times I_{TVDD}) + (CVDD \times I_{CVDD}) + (AVDD_TX \times I_{AVDD_TX}) + (DVDD \times I_{DVDD}) + (DVDDIO \times I_{DVDDIO}))$$

Note that this calculation assumes a configuration of one active HDMI Rx input and one active HDMI Tx output, where termination is open on the unused Rx input ports.

ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

PIN CONFIGURATION AND FUNCTION DESCRIPTIONS

| | | | | | | | | | | | | | | | | | | | |
|---|-------------|-------------|-------------|--------------------|-----------------|---------|---------|-------------|-------------|-------------|-------------|---------|---------|---------------|-------------|-------------|------------|--------|--------|
| A | GND | RXA_2+ | RXA_1+ | RXA_0+ | RXA_C+ | CVDD | RXB_2+ | RXB_1+ | RXB_0+ | RXB_C+ | CVDD | RXC_2+ | RXC_1+ | RXC_0+ | RXC_C+ | CVDD | RXC_5V | GND | |
| B | GND | RXA_2- | RXA_1- | RXA_0- | RXA_C- | CVDD | RXB_2- | RXB_1- | RXB_0- | RXB_C- | CVDD | RXC_2- | RXC_1- | RXC_0- | RXC_C- | CVDD | RXC_HPA | GND | |
| C | GND | CVDD | CVDD | TVDD | TVDD | GND | GND | TVDD | TVDD | GND | GND | TVDD | TVDD | GND | GND | CVDD | GND | GND | |
| D | INT1 | INT2 | SCL | SDA | \overline{CS} | RXA_5V | RXA_HPA | DDC_SCL_RXA | DDC_SDA_RXA | DDC_SCL_RXB | DDC_SDA_RXB | RXB_HPA | RXB_5V | DDC_SDA_RXC | DDC_SCL_RXC | TVDD | RXD_2- | RXD_2+ | |
| E | NC | NC | ALSB | \overline{RESET} | | | | | | | | | | | | RXD_5V | TVDD | RXD_1- | RXD_1+ |
| F | NC | NC | AP_OUT0 | AP_OUT1 | | | | | | | | | | | | RXD_HPA | GND | RXD_0- | RXD_0+ |
| G | NC | NC | AP_OUT2 | AP_OUT3 | | | DVDD | DVDD | DVDD | DVDD | DVDD | TEST5 | | | | DDC_SCL_RXD | GND | RXD_C- | RXD_C+ |
| H | NC | NC | AP_OUT4 | AP_OUT5 | | | DVDDIO | GND | GND | GND | GND | GND | | | | DDC_SDA_RXD | GND | CVDD | CVDD |
| J | AP_OUT_MCLK | AP_OUT_SCLK | TEST6 | TEST7 | | | DVDDIO | GND | GND | GND | GND | GND | | | | DDC_SCL_RXE | TVDD | RXE_2- | RXE_2+ |
| K | GND | GND | TEST8 | AUD_IN | | | GND | GND | GND | GND | GND | GND | | | | DDC_SDA_RXE | TVDD | RXE_1- | RXE_1+ |
| L | XTAL+ | XTAL- | AUD_IN_SCLK | AUD_IN_LRCLK | | | GND | GND | GND | GND | GND | GND | | | | RXE_HPA | GND | RXE_0- | RXE_0+ |
| M | PVDD | PVDD | TEST3 | TEST2 | | | GND | GND | GND | GND | GND | GND | | | | RXE_5V | GND | RXE_C- | RXE_C+ |
| N | GND | GND | PVDD_TX | PVDD_TX | | | | | | | | | | | | GND | GND | CVDD | CVDD |
| P | NC | NC | GND | TEST14 | | | | | | | | | | | | HS | VS | TEST4 | TEST1 |
| R | NC | NC | GND | AVDD_TX | TX_HPD_ARC- | R_TX | GND | TX_ARC+ | DDC_SDA_TX | DDC_SCL_TX | CEC | DVDDIO | EP_CS | P9/AP_IN_SCLK | P11/AP_IN4 | P13/AP_IN2 | P15/AP_IN0 | PCLK | |
| T | NC | NC | GND | AVDD_TX | TEST9 | GND | GND | GND | GND | AVDD_TX | AVDD_TX | DVDDIO | EP_SCLK | P8/AP_IN_MCLK | P10/AP_IN5 | P12/AP_IN3 | P14/AP_IN1 | DE | |
| U | NC | NC | GND | TEST10 | TEST11 | PVDD_TX | GND | TX_C+ | TX_0+ | TX_1+ | TX_2+ | GND | EP_MOSI | P1 | P3 | P5 | P7 | GND | |
| V | GND | GND | GND | TEST12 | TEST13 | PVDD_TX | GND | TX_C- | TX_0- | TX_1- | TX_2- | GND | EP_MISO | P0 | P2 | P4 | P6 | GND | |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | |

Figure 19. Pin Configuration

Table 5. Pin Function Descriptions

| Pin No. | Mnemonic | Function | Description |
|---------|----------|---------------|----------------------------------|
| A1 | GND | Ground | Ground. |
| A2 | RXA_2+ | HDMI Rx input | HDMI RxA Channel 2 True Input. |
| A3 | RXA_1+ | HDMI Rx input | HDMI RxA Channel 1 True Input. |
| A4 | RXA_0+ | HDMI Rx input | HDMI RxA Channel 0 True Input. |
| A5 | RXA_C+ | HDMI Rx input | HDMI RxA Clock True Input. |
| A6 | CVDD | Power | Comparator Power Supply (1.8 V). |
| A7 | RXB_2+ | HDMI Rx input | HDMI RxB Channel 2 True Input. |
| A8 | RXB_1+ | HDMI Rx input | HDMI RxB Channel 1 True Input. |
| A9 | RXB_0+ | HDMI Rx input | HDMI RxB Channel 0 True Input. |
| A10 | RXB_C+ | HDMI Rx input | HDMI RxB Clock True Input. |
| A11 | CVDD | Power | Comparator Power Supply (1.8 V). |
| A12 | RXC_2+ | HDMI Rx input | HDMI RxC Channel 2 True Input. |

| Pin No. | Mnemonic | Function | Description |
|---------|------------------------|--------------------------|---|
| A13 | RXC_1+ | HDMI Rx input | HDMI RxC Channel 1 True Input. |
| A14 | RXC_0+ | HDMI Rx input | HDMI RxC Channel 0 True Input. |
| A15 | RXC_C+ | HDMI Rx input | HDMI RxC Clock True Input. |
| A16 | CVDD | Power | Comparator Power Supply (1.8 V). |
| A17 | RXC_5V | HDMI Rx input | HDMI RxC 5 V Detect Pin. |
| A18 | GND | Ground | Ground. |
| B1 | GND | Ground | Ground. |
| B2 | RXA_2– | HDMI Rx input | HDMI RxA Channel 2 Complement Input. |
| B3 | RXA_1– | HDMI Rx input | HDMI RxA Channel 1 Complement Input. |
| B4 | RXA_0– | HDMI Rx input | HDMI RxA Channel 0 Complement Input. |
| B5 | RXA_C– | HDMI Rx input | HDMI RxA Clock Complement Input. |
| B6 | CVDD | Power | Comparator Power Supply (1.8 V). |
| B7 | RXB_2– | HDMI Rx input | HDMI RxB Channel 2 Complement Input. |
| B8 | RXB_1– | HDMI Rx input | HDMI RxB Channel 1 Complement Input. |
| B9 | RXB_0– | HDMI Rx input | HDMI RxB Channel 0 Complement Input. |
| B10 | RXB_C– | HDMI Rx input | HDMI RxB Clock Complement Input. |
| B11 | CVDD | Power | Comparator Power Supply (1.8 V). |
| B12 | RXC_2– | HDMI Rx input | HDMI RxC Channel 2 Complement Input. |
| B13 | RXC_1– | HDMI Rx input | HDMI RxC Channel 1 Complement Input. |
| B14 | RXC_0– | HDMI Rx input | HDMI RxC Channel 0 Complement Input. |
| B15 | RXC_C– | HDMI Rx input | HDMI RxC Clock Complement Input. |
| B16 | CVDD | Power | Comparator Power Supply (1.8 V). |
| B17 | RXC_HPA | HDMI Rx output | HDMI RxC Hot Plug Assert. |
| B18 | GND | Ground | Ground. |
| C1 | GND | Ground | Ground. |
| C2 | CVDD | Power | Comparator Power Supply (1.8 V). |
| C3 | CVDD | Power | Comparator Power Supply (1.8 V). |
| C4 | TVDD | Power | HDMI Rx Terminator Supply Voltage (3.3 V). |
| C5 | TVDD | Power | HDMI Rx Terminator Supply Voltage (3.3 V). |
| C6 | GND | Ground | Ground. |
| C7 | GND | Ground | Ground. |
| C8 | TVDD | Power | HDMI Rx Terminator Supply Voltage (3.3 V). |
| C9 | TVDD | Power | HDMI Rx Terminator Supply Voltage (3.3 V). |
| C10 | GND | Ground | Ground. |
| C11 | GND | Ground | Ground. |
| C12 | TVDD | Power | HDMI Rx Terminator Supply Voltage (3.3 V). |
| C13 | TVDD | Power | HDMI Rx Terminator Supply Voltage (3.3 V). |
| C14 | GND | Ground | Ground. |
| C15 | GND | Ground | Ground. |
| C16 | CVDD | Power | Comparator Power Supply (1.8 V). |
| C17 | GND | Ground | Ground. |
| C18 | GND | Ground | Ground. |
| D1 | INT1 | Control | Interrupt Output. This pin can be active low or high. When an unmasked status bit changes, an interrupt is generated on this pin. |
| D2 | INT2 | Control | Interrupt Output. This pin can be active low or high. When an unmasked status bit changes, an interrupt is generated on this pin. |
| D3 | SCL | I ² C control | I ² C Clock Input. This pin is open drain; connect this pin to a 3.3 V supply using a 4.7 k Ω resistor. |
| D4 | SDA | I ² C control | I ² C Data Input. This pin is open drain; connect this pin to a 3.3 V supply using a 4.7 k Ω resistor. |
| D5 | $\overline{\text{CS}}$ | Digital input | Chip Select Pin. This pin must be set low or left floating for the chip to process I ² C messages that are destined for the ADV7627 . The ADV7627 ignores I ² C messages when this pin is high. |
| D6 | RXA_5V | HDMI Rx input | HDMI RxA 5 V Detect Pin. |

| Pin No. | Mnemonic | Function | Description |
|---------|---------------------------|--------------------------|--|
| D7 | RXA_HPA | HDMI Rx output | HDMI RxA Hot Plug Assert. |
| D8 | DDC_SCL_RXA | HDMI Rx DDC | HDCP Slave Serial Clock for HDMI RxA. |
| D9 | DDC_SDA_RXA | HDMI Rx DDC | HDCP Slave Serial Data for HDMI RxA. |
| D10 | DDC_SCL_RXB | HDMI Rx DDC | HDCP Slave Serial Clock for HDMI RxB. |
| D11 | DDC_SDA_RXB | HDMI Rx DDC | HDCP Slave Serial Data for HDMI RxB. |
| D12 | RXB_HPA | HDMI Rx output | HDMI RxB Hot Plug Assert. |
| D13 | RXB_5V | HDMI Rx input | HDMI RxB 5 V Detect Pin. |
| D14 | DDC_SDA_RXC | HDMI Rx DDC | HDCP Slave Serial Data for HDMI RxC. |
| D15 | DDC_SCL_RXC | HDMI Rx DDC | HDCP Slave Serial Clock for HDMI RxC. |
| D16 | TVDD | Power | HDMI Rx Terminator Supply Voltage (3.3 V). |
| D17 | RXD_2- | HDMI Rx input | HDMI RxD Channel 2 Complement Input. |
| D18 | RXD_2+ | HDMI Rx input | HDMI RxD Channel 2 True Input. |
| E1 | NC | Do not connect | Leave this pin floating. |
| E2 | NC | Do not connect | Leave this pin floating. |
| E3 | ALSB | I ² C control | Pin to set the I ² C address of the I/O register map for the device. When the ALSB pin is tied low, the I/O register map I ² C address is 0xB0. When the ALSB pin is tied high, the I/O register map I ² C address is 0xB2. |
| E4 | $\overline{\text{RESET}}$ | Miscellaneous digital | Reset Pin. |
| E15 | RXD_5V | HDMI Rx input | HDMI RxD 5 V Detect Pin. |
| E16 | TVDD | Power | HDMI Rx Terminator Supply Voltage (3.3 V). |
| E17 | RXD_1- | HDMI Rx input | HDMI RxD Channel 1 Complement Input. |
| E18 | RXD_1+ | HDMI Rx input | HDMI RxD Channel 1 True Input. |
| F1 | NC | Do not connect | Leave this pin floating. |
| F2 | NC | Do not connect | Leave this pin floating. |
| F3 | AP_OUT0 | Audio output | Audio Output Port, Output 0. |
| F4 | AP_OUT1 | Audio output | Audio Output Port, Output 1. |
| F15 | RXD_HPA | HDMI Rx output | HDMI RxD Hot Plug Assert. |
| F16 | GND | Ground | Ground. |
| F17 | RXD_0- | HDMI Rx input | HDMI RxD Channel 0 Complement Input. |
| F18 | RXD_0+ | HDMI Rx input | HDMI RxD Channel 0 True Input. |
| G1 | NC | Do not connect | Leave this pin floating. |
| G2 | NC | Do not connect | Leave this pin floating. |
| G3 | AP_OUT2 | Audio output | Audio Output Port, Output 2. |
| G4 | AP_OUT3 | Audio output | Audio Output Port, Output 3. |
| G7 | DVDD | Power | Digital Power Supply (1.8 V). |
| G8 | DVDD | Power | Digital Power Supply (1.8 V). |
| G9 | DVDD | Power | Digital Power Supply (1.8 V). |
| G10 | DVDD | Power | Digital Power Supply (1.8 V). |
| G11 | DVDD | Power | Digital Power Supply (1.8 V). |
| G12 | TEST5 | Test pin | Test Pin 5. Leave this pin floating. |
| G15 | DDC_SCL_RXD | HDMI Rx DDC | HDCP Slave Serial Clock for HDMI RxD. |
| G16 | GND | Ground | Ground. |
| G17 | RXD_C- | HDMI Rx input | HDMI RxD Clock Complement Input. |
| G18 | RXD_C+ | HDMI Rx input | HDMI RxD Clock True Input. |
| H1 | NC | Do not connect | Leave this pin floating. |
| H2 | NC | Do not connect | Leave this pin floating. |
| H3 | AP_OUT4 | Audio output | Audio Output Port, Output 4. |
| H4 | AP_OUT5 | Audio output | Audio Output Port, Output 5. |
| H7 | DVDDIO | Power | Digital Interface Supply (3.3V). |
| H8 | GND | Ground | Ground. |
| H9 | GND | Ground | Ground. |
| H10 | GND | Ground | Ground. |
| H11 | GND | Ground | Ground. |

| Pin No. | Mnemonic | Function | Description |
|---------|--------------|-----------------------|---|
| H12 | GND | Ground | Ground. |
| H15 | DDC_SDA_RXD | HDMI Rx DDC | HDCP Slave Serial Data for HDMI RxD. |
| H16 | GND | Ground | Ground. |
| H17 | CVDD | Power | Comparator Power Supply (1.8 V). |
| H18 | CVDD | Power | Comparator Power Supply (1.8 V). |
| J1 | AP_OUT_MCLK | Audio output | Audio Output Port, MCLK. |
| J2 | AP_OUT_SCLK | Audio output | Audio Output Port, SCLK. |
| J3 | TEST6 | Test pin | Connect this pin to ground using a 4.7 kΩ resistor. |
| J4 | TEST7 | Test pin | Connect this pin to ground using a 4.7 kΩ resistor. |
| J7 | DVDDIO | Power | Digital Interface Supply (3.3 V). |
| J8 | GND | Ground | Ground. |
| J9 | GND | Ground | Ground. |
| J10 | GND | Ground | Ground. |
| J11 | GND | Ground | Ground. |
| J12 | GND | Ground | Ground. |
| J15 | DDC_SCL_RXE | HDMI Rx DDC | HDCP Slave Serial Clock for HDMI RxE. |
| J16 | TVDD | Power | HDMI Rx Terminator Supply Voltage (3.3 V). |
| J17 | RXE_2- | HDMI Rx input | HDMI RxE Channel 2 Complement Input. |
| J18 | RXE_2+ | HDMI Rx input | HDMI RxE Channel 2 True Input. |
| K1 | GND | Ground | Ground. |
| K2 | GND | Ground | Ground. |
| K3 | TEST8 | Test pin | Connect this pin to ground using a 4.7 kΩ resistor. |
| K4 | AUD_IN | Audio input | Audio Input Port, I ² S or S/PDIF Input. |
| K7 | GND | Ground | Ground. |
| K8 | GND | Ground | Ground. |
| K9 | GND | Ground | Ground. |
| K10 | GND | Ground | Ground. |
| K11 | GND | Ground | Ground. |
| K12 | GND | Ground | Ground. |
| K15 | DDC_SDA_RXE | HDMI Rx DDC | HDCP Slave Serial Data for HDMI RxE. |
| K16 | TVDD | Power | HDMI Rx Terminator Supply Voltage (3.3 V). |
| K17 | RXE_1- | HDMI Rx input | HDMI RxE Channel 1 Complement Input. |
| K18 | RXE_1+ | HDMI Rx input | HDMI RxE Channel 1 True Input. |
| L1 | XTAL+ | Miscellaneous digital | ADV7627 Crystal Input. |
| L2 | XTAL- | Miscellaneous digital | ADV7627 Crystal Output. |
| L3 | AUD_IN_SCLK | Audio input | Audio Input Port, SCLK. |
| L4 | AUD_IN_LRCLK | Audio input | Audio Input Port, LRCLK. |
| L7 | GND | Ground | Ground. |
| L8 | GND | Ground | Ground. |
| L9 | GND | Ground | Ground. |
| L10 | GND | Ground | Ground. |
| L11 | GND | Ground | Ground. |
| L12 | GND | Ground | Ground. |
| L15 | RXE_HPA | HDMI Rx output | HDMI RxE Hot Plug Assert. |
| L16 | GND | Ground | Ground. |
| L17 | RXE_0- | HDMI Rx input | HDMI RxE Channel 0 Complement Input. |
| L18 | RXE_0+ | HDMI Rx input | HDMI RxE Channel 0 True Input. |
| M1 | PVDD | Power | PLL Digital Supply (1.8 V). |
| M2 | PVDD | Power | PLL Digital Supply (1.8 V). |
| M3 | TEST3 | Test pin | Test Pin 3. Leave this pin floating. |
| M4 | TEST2 | Test pin | Test Pin 2. Leave this pin floating. |
| M7 | GND | Ground | Ground. |
| M8 | GND | Ground | Ground. |

| Pin No. | Mnemonic | Function | Description |
|---------|---------------|------------------------------|---|
| M9 | GND | Ground | Ground. |
| M10 | GND | Ground | Ground. |
| M11 | GND | Ground | Ground. |
| M12 | GND | Ground | Ground. |
| M15 | RXE_5V | HDMI Rx input | HDMI RxE 5 V Detect Pin. |
| M16 | GND | Ground | Ground. |
| M17 | RXE_C- | HDMI Rx input | HDMI RxE Clock Complement Input. |
| M18 | RXE_C+ | HDMI Rx input | HDMI RxE Clock True Input. |
| N1 | GND | Ground | Ground. |
| N2 | GND | Ground | Ground. |
| N3 | PVDD_TX | Power | HDMI Tx PLL Power Supply (1.8 V). |
| N4 | PVDD_TX | Power | HDMI Tx PLL Power Supply (1.8 V). |
| N15 | GND | Ground | Ground. |
| N16 | GND | Ground | Ground. |
| N17 | CVDD | Power | Comparator Power Supply (1.8 V). |
| N18 | CVDD | Power | Comparator Power Supply (1.8 V). |
| P1 | NC | Do not connect | Leave this pin floating. |
| P2 | NC | Do not connect | Leave this pin floating. |
| P3 | GND | Ground | Ground. |
| P4 | TEST14 | Test pin | Connect this pin to ground using a 4.7 k Ω resistor. |
| P15 | HS | Pixel port input sync | Horizontal Synchronization for Pixel Port Input Video. |
| P16 | VS | Pixel port input sync | Vertical Synchronization for Pixel Port Input Video. |
| P17 | TEST4 | Test pin | Test Pin 4. Leave this pin floating. |
| P18 | TEST1 | Test pin | Test Pin 1. Leave this pin floating. |
| R1 | NC | Do not connect | Leave this pin floating. |
| R2 | NC | Do not connect | Leave this pin floating. |
| R3 | GND | Ground | Ground. |
| R4 | AVDD_TX | Power | HDMI Tx Analog Supply (1.8 V). |
| R5 | TX_HPD_ARC- | HDMI Tx input | HDMI Tx Hot Plug Detect (HPD) Signal and Audio Return Channel Complement Input. |
| R6 | R_TX | HDMI Tx input | This pin sets the internal reference currents for HDMI Tx. Place a 470 Ω resistor (1% tolerance) between this pin and GND. Place the external resistor as close as possible to the ADV7627 . |
| R7 | GND | Ground | Ground. |
| R8 | TX_ARC+ | HDMI Tx input | HDMI Tx Audio Return Channel True Input. |
| R9 | DDC_SDA_TX | HDMI Tx DDC | HDCP Slave Serial Data for HDMI Tx. |
| R10 | DDC_SCL_TX | HDMI Tx DDC | HDCP Slave Serial Clock for HDMI Tx. |
| R11 | CEC | HDMI Tx CEC | HDMI Tx Consumer Electronics Control (CEC). |
| R12 | DVDDIO | Power | Digital Interface Supply (3.3 V). |
| R13 | EP_CS | Serial port control | SPI Chip Select Interface for the OSD. |
| R14 | P9/AP_IN_SCLK | Pixel port input/audio input | Pixel Port Input P9/Audio Input Port, SCLK. |
| R15 | P11/AP_IN4 | Pixel port input/audio input | Pixel Port Input P11/Audio Input Port, Input 4. |
| R16 | P13/AP_IN2 | Pixel port input/audio input | Pixel Port Input P13/Audio Input Port, Input 2. |
| R17 | P15/AP_IN0 | Pixel port input/audio input | Pixel Port Input P15/Audio Input Port, Input 0. |
| R18 | PCLK | Pixel port input clock | Pixel Clock for Pixel Port Input Video. |
| T1 | NC | Do not connect | Leave this pin floating. |
| T2 | NC | Do not connect | Leave this pin floating. |
| T3 | GND | Ground | Ground. |
| T4 | AVDD_TX | Power | HDMI Tx Analog Supply (1.8 V). |
| T5 | TEST9 | Test pin | Connect this pin to ground using a 4.7 k Ω resistor. |
| T6 | GND | Ground | Ground. |
| T7 | GND | Ground | Ground. |
| T8 | GND | Ground | Ground. |
| T9 | GND | Ground | Ground. |

| Pin No. | Mnemonic | Function | Description |
|---------|---------------|------------------------------|---|
| T10 | AVDD_TX | Power | HDMI Tx Analog Supply (1.8V). |
| T11 | AVDD_TX | Power | HDMI Tx Analog Supply (1.8V). |
| T12 | DVDDIO | Power | Digital Interface Supply (3.3V). |
| T13 | EP_SCLK | Serial port control | SPI Clock Interface for the OSD. |
| T14 | P8/AP_IN_MCLK | Pixel port input/audio input | Pixel Port Input P8/Audio Input Port, MCLK. |
| T15 | P10/AP_IN5 | Pixel port input/audio input | Pixel Port Input P10/Audio Input Port, Input 5. |
| T16 | P12/AP_IN3 | Pixel port input/audio input | Pixel Port Input P12/Audio Input Port, Input 3. |
| T17 | P14/AP_IN1 | Pixel port input/audio input | Pixel Port Input P14/Audio Input Port, Input 1. |
| T18 | DE | Pixel port input sync | Data Enable for Pixel Port Input Video. |
| U1 | NC | Do not connect | Leave this pin floating. |
| U2 | NC | Do not connect | Leave this pin floating. |
| U3 | GND | Ground | Ground. |
| U4 | TEST10 | Test pin | Connect this pin to ground using a 4.7 k Ω resistor. |
| U5 | TEST11 | Test pin | Connect this pin to ground using a 4.7 k Ω resistor. |
| U6 | PVDD_TX | Power | HDMI Tx PLL Power Supply (1.8V). |
| U7 | GND | Ground | Ground. |
| U8 | TX_C+ | HDMI Tx output | HDMI Tx Clock True Output. |
| U9 | TX_0+ | HDMI Tx output | HDMI Tx Channel 0 True Output. |
| U10 | TX_1+ | HDMI Tx output | HDMI Tx Channel 1 True Output. |
| U11 | TX_2+ | HDMI Tx output | HDMI Tx Channel 2 True Output. |
| U12 | GND | Ground | Ground. |
| U13 | EP_MOSI | Serial port control | SPI Master Output/Slave Input for OSD. |
| U14 | P1 | Pixel port input | Pixel Port Input P1. |
| U15 | P3 | Pixel port input | Pixel Port Input P3. |
| U16 | P5 | Pixel port input | Pixel Port Input P5. |
| U17 | P7 | Pixel port input | Pixel Port Input P7. |
| U18 | GND | Ground | Ground. |
| V1 | GND | Ground | Ground. |
| V2 | GND | Ground | Ground. |
| V3 | GND | Ground | Ground. |
| V4 | TEST12 | Test pin | Connect this pin to ground using a 4.7 k Ω resistor. |
| V5 | TEST13 | Test pin | Connect this pin to ground using a 4.7 k Ω resistor. |
| V6 | PVDD_TX | Power | HDMI Tx PLL Power Supply (1.8V). |
| V7 | GND | Ground | Ground. |
| V8 | TX_C- | HDMI Tx output | HDMI Tx Clock Complement Output. |
| V9 | TX_0- | HDMI Tx output | HDMI Tx Channel 0 Complement Output. |
| V10 | TX_1- | HDMI Tx output | HDMI Tx Channel 1 Complement Output. |
| V11 | TX_2- | HDMI Tx output | HDMI Tx Channel 2 Complement Output. |
| V12 | GND | Ground | Ground. |
| V13 | EP_MISO | Serial port control | SPI Master Input/Slave Output for OSD. |
| V14 | P0 | Pixel port input | Pixel Port Input P0. |
| V15 | P2 | Pixel port input | Pixel Port Input P2. |
| V16 | P4 | Pixel port input | Pixel Port Input P4. |
| V17 | P6 | Pixel port input | Pixel Port Input P6. |
| V18 | GND | Ground | Ground. |

POWER SUPPLY RECOMMENDATIONS

POWER-UP SEQUENCE

The power-up sequence for the [ADV7627](#) is as follows:

1. Hold the `RESET` pin low.
2. Power up the 3.3 V supplies (DVDDIO and TVDD).
3. After the 3.3 V supplies reach their minimum recommended value of 3.14 V, wait at least 20 ms before powering up the 1.8 V supplies.
4. Power up the 1.8 V supplies (AVDD_TX, CVDD, DVDD, PVDD, and PVDD_TX). These supplies should be powered up at the same time; that is, there should be a difference of less than 0.3 V between them.
5. Release the `RESET` pin after all supplies are established.

After power-up, a complete reset is recommended. This reset can be performed by the system microcontroller.

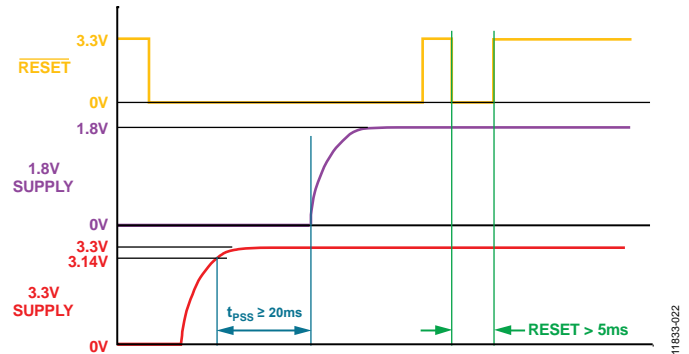


Figure 20. *ADV7627* Supply Power-Up Sequence

POWER-DOWN SEQUENCE

The [ADV7627](#) supplies can be deasserted simultaneously as long as DVDDIO or TVDD does not fall below a lower rated supply.

THEORY OF OPERATION

HDMI RECEIVER

The [ADV7627](#) front end incorporates a 5:1 multiplexed HDMI receiver capable of receiving all HDTV formats up to 3 GHz (4k × 2k at 24 Hz/25 Hz/30 Hz). The HDMI receiver also supports HDMI features including 3D TV and content type bits.

The HDMI receiver in the [ADV7627](#) incorporates an adaptive equalizer, which compensates for the high frequency losses inherent in HDMI and DVI cabling, especially at longer lengths and higher frequencies.

The [ADV7627](#) features a 768-byte internal EDID memory space, which can be used to store two independent EDIDs. The memory can be partitioned to provide two 256-byte EDIDs or one 512-byte extended EDID and one 256-byte EDID. Either EDID can be replicated on any input port.

The HDMI receiver offers advanced audio functionality. The receiver supports multichannel I²S audio for up to eight channels. The receiver also supports a six-DSD channel interface, with each channel carrying an oversampled 1-bit representation of the audio signal as delivered on SACD. The [ADV7627](#) can also receive HBR audio packet streams and output them through the HBR interface in an S/PDIF format that conforms to the IEC 60958 standard. S/PDIF is supported via the HPD back channel. The receiver also contains an audio mute controller that can detect a variety of conditions that can result in audible extraneous noise in the audio output. On detection of these conditions, the audio data can be ramped to prevent audio clicks or pops.

HDCP REPEATER FUNCTIONALITY

With the inclusion of HDCP 1.4, displays can receive encrypted video content. The HDMI interface of the [ADV7627](#) allows authentication of a video receiver, decryption of encoded data at the receiver, and renewability of that authentication during transmission, as specified by the HDCP 1.4 protocol. Repeater support is also offered by the [ADV7627](#).

DIGITAL AUDIO PORTS

The [ADV7627](#) features an audio input port and an audio output port. The audio input and output ports provide comprehensive muxing support for the destination of the audio (for example, to the HDMI transmitter or audio output port) and support for the source of the audio (for example, from the HDMI receiver or from the audio input port). The extracted audio can be processed by a SHARC® processor and can be reinserted back into the HDMI output stream or output via the hardware connected to the system.

The pins for the pixel port input signals (P15 to P8) are shared with the AP_IN audio input port. When the pixel port input is in use, the AUD_IN port can be used to provide stereo audio input.

ON-SCREEN DISPLAY

A key feature of the [ADV7627](#) is the on-chip character- and icon-based OSD generator. The generated OSD can be converted to match the 4:2:2 or 4:4:4 input format in either the RGB or YCrCb color spaces. After the OSD is generated, it is overlaid at the output resolution (any video resolution up to 4k × 2k at 24 Hz/25 Hz/30 Hz) for best performance. The OSD portion of the image is optionally semitransparent using a 5-bit alpha blend between the input video and the OSD. The OSD font characters and icons can be stored in external SPI flash memory, read directly into RAM, or they can be loaded into the on-chip RAM via the SPI or I²C interface.

PIXEL PORT INPUT

The [ADV7627](#) features a 16-bit pixel input port that facilitates the reception of digital video data from an analog front-end video decoder such as the [ADV7180](#), [ADV7181D](#), or [ADV7842](#). Both embedded timing and external synchronization signals are supported on the pixel port. The pixel port input also features an interlaced-to-progressive converter for 480i or 576i inputs.

HDMI TRANSMITTER

The [ADV7627](#) incorporates an HDMI transmitter, which supports all HDTV formats up to 3 GHz (4k × 2k at 24 Hz/25 Hz/30 Hz), ARC, and all mandatory 3D TV formats. The HDMI transmitter can output any audio mode received from the HDMI receiver, including audio sample packets, HBR, or DSD.

The ARC receiver supports both single-ended and differential modes and simplifies cabling by combining an upstream audio capability in a conventional HDMI cable. The transmitter features an on-chip MPU with an I²C master to perform HDCP operations and EDID read operations.

I²C INTERFACE


The [ADV7627](#) supports a 2-wire serial (I²C-compatible) microprocessor bus driving multiple peripherals. The [ADV7627](#) is controlled by an external I²C master device, such as a microcontroller.

OTHER FEATURES

Other features of the [ADV7627](#) include the following:

- Fully qualified software low level libraries, driver, and application
- Complete input and output audio support
- Programmable interrupt request output pins: INT1 and INT2
- Chip select and ALSB
- Low power consumption: 1.8 V digital core, 1.8 V analog, and 3.3 V digital input/output
- Temperature range: 0°C to 70°C
- 15 mm × 15 mm, Pb-free, 260-ball CSP_BGA

OUTLINE DIMENSIONS

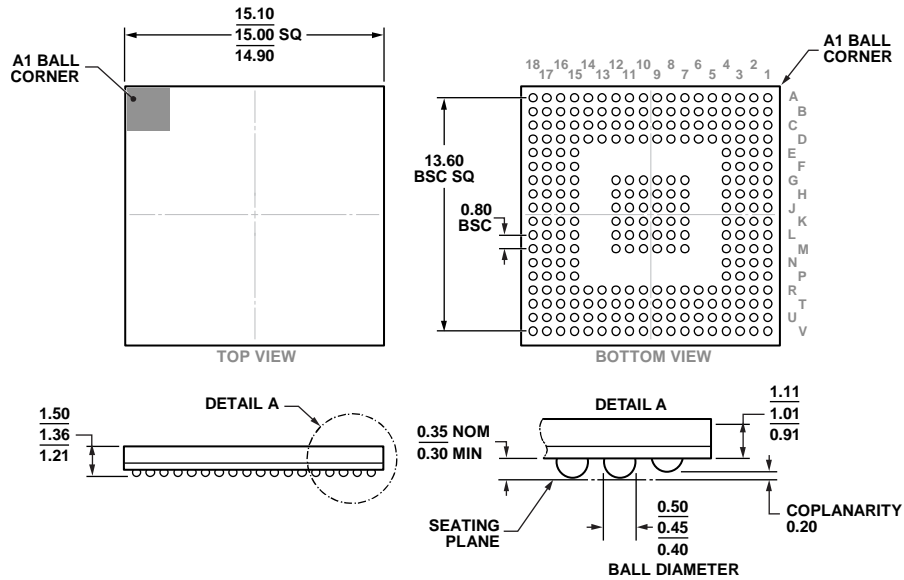

COMPLIANT TO JEDEC STANDARDS MO-275-KKAB-1.

Figure 21. 260-Ball Chip Scale Package Ball Grid Array [CSP_BGA] (BC-260-1)

Dimensions shown in millimeters

11-18-2013-B

ORDERING GUIDE

| Model ^{1,2} | Temperature Range | Package Description | Package Option |
|----------------------|-------------------|---|----------------|
| ADV7627KBCZ-8 | 0°C to 70°C | 260-Ball Chip Scale Package Ball Grid Array [CSP_BGA] | BC-260-1 |
| ADV7627KBCZ-8-RL | 0°C to 70°C | 260-Ball Chip Scale Package Ball Grid Array [CSP_BGA] | BC-260-1 |
| EVAL-ADV7625-SMZ | | Evaluation Board | |

¹ Z = RoHS Compliant Part.

² This part is programmed with internal HDCP keys. Customers must have HDCP adopter status (consult Digital Content Protection, LLC, for licensing requirements) to purchase any components with internal HDCP keys.

NOTES

I²C refers to a communications protocol originally developed by Philips Semiconductors (now NXP Semiconductors).

HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

©2013 Analog Devices, Inc. All rights reserved. Trademarks and registered trademarks are the property of their respective owners.
D11833-0-12/13(0)



www.analog.com