

ISO776x High-Speed, Robust EMC, Reinforced Six-Channel Digital Isolators

1 Features

- Signaling Rate: Up to 100 Mbps
- Wide Supply Range: 2.25 V to 5.5 V
- 2.25-V to 5.5-V Level Translation
- Default Output *High* and *Low* Options
- Wide Temperature Range: –55°C to +125°C
- Low Power Consumption, Typical 1.4 mA per Channel at 1 Mbps
- Low Propagation Delay: 11 ns Typical (5-V Supplies)
- High CMTI: ±100 kV/μs Typical
- Robust Electromagnetic Compatibility (EMC)
- System-Level ESD, EFT, and Surge Immunity
- Low Emissions
- Isolation Barrier Life: >40 Years
- Wide-SOIC (DW-16) and SSOP (DBQ-16) Package Options
- Safety-Related Certifications:
 - Reinforced Insulation per DIN V VDE V 0884-11:2017-01
 - UL 1577 Component Recognition Program
 - CSA Certification according to IEC 60950-1, IEC 62368-1 and IEC 60601-1 End Equipment Standards
 - CQC Certification per GB4943.1-2011
 - TUV Certification according to EN 60950-1 and EN 61010-1
 - All Certifications are Planned

2 Applications

- Factory Automation and Control
- Test and Measurement
- Telecom Infrastructure
- Grid Infrastructure
- Medical, Healthcare, and Fitness

3 Description

The ISO776x devices are high-performance, six-channel digital isolators with 5000- V_{RMS} (DW package) and 3000- V_{RMS} (DBQ package) isolation ratings per UL 1577. This family of devices is also certified according to VDE, CSA, TUV and CQC.

The ISO776x family of devices provides high-electromagnetic immunity and low emissions at low-power consumption, while isolating CMOS or LVCMOS digital I/Os. Each isolation channel has a logic-input and logic-output buffer separated by a silicon dioxide (SiO_2) insulation barrier. The ISO776x family of devices is available in all possible pin configurations such that all six channels are in the same direction, or one, two, or three channels are in reverse direction while the remaining channels are in forward direction. If the input power or signal is lost, the default output is *high* for devices without suffix F and *low* for devices with suffix F. See the [Device Functional Modes](#) section for further details.


Used in conjunction with isolated power supplies, this family of devices helps prevent noise currents on a data bus or other circuits from entering the local ground and interfering with or damaging sensitive circuitry. Through innovative chip design and layout techniques, electromagnetic compatibility of the ISO776x family of devices has been significantly enhanced to ease system-level ESD, EFT, surge, and emissions compliance. The ISO776x family of devices is available in 16-pin SOIC and SSOP packages.

Device Information⁽¹⁾

| PART NUMBER | PACKAGE | BODY SIZE (NOM) |
|--|-----------|--------------------|
| ISO7760 ISO7761 ISO7762 ISO7763 | SOIC (16) | 10.30 mm × 7.50 mm |
| | SSOP (16) | 4.90 mm × 3.90 mm |

(1) For all available packages, see the orderable addendum at the end of the datasheet.

Simplified Schematic

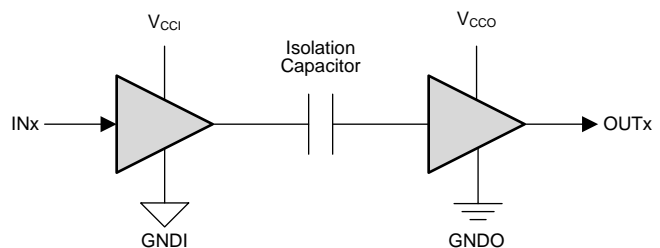

Copyright © 2016, Texas Instruments Incorporated

V_{CCI} and $GNDI$ are the supply and ground connections respectively for the input channels.

V_{CCO} and $GNDO$ are the supply and ground connections respectively for the output channels.



Table of Contents

| | | | |
|--|-----------|--|-----------|
| 1 Features | 1 | 6.19 Typical Characteristics | 18 |
| 2 Applications | 1 | 7 Parameter Measurement Information | 21 |
| 3 Description | 1 | 8 Detailed Description | 22 |
| 4 Revision History | 2 | 8.1 Overview | 22 |
| 5 Pin Configuration and Functions | 3 | 8.2 Functional Block Diagram | 22 |
| 6 Specifications | 5 | 8.3 Feature Description | 23 |
| 6.1 Absolute Maximum Ratings | 5 | 8.4 Device Functional Modes | 24 |
| 6.2 ESD Ratings | 5 | 9 Application and Implementation | 25 |
| 6.3 Recommended Operating Conditions | 5 | 9.1 Application Information | 25 |
| 6.4 Thermal Information | 6 | 9.2 Typical Application | 25 |
| 6.5 Power Ratings | 6 | 10 Power Supply Recommendations | 28 |
| 6.6 Insulation Specifications | 7 | 11 Layout | 29 |
| 6.7 Safety-Related Certifications | 8 | 11.1 Layout Guidelines | 29 |
| 6.8 Safety Limiting Values | 8 | 11.2 Layout Example | 29 |
| 6.9 Electrical Characteristics—5-V Supply | 9 | 12 Device and Documentation Support | 30 |
| 6.10 Supply Current Characteristics—5-V Supply | 10 | 12.1 Documentation Support | 30 |
| 6.11 Electrical Characteristics—3.3-V Supply | 11 | 12.2 Related Links | 30 |
| 6.12 Supply Current Characteristics—3.3-V Supply | 12 | 12.3 Receiving Notification of Documentation Updates | 30 |
| 6.13 Electrical Characteristics—2.5-V Supply | 13 | 12.4 Community Resources | 30 |
| 6.14 Supply Current Characteristics—2.5-V Supply | 14 | 12.5 Trademarks | 30 |
| 6.15 Switching Characteristics—5-V Supply | 15 | 12.6 Electrostatic Discharge Caution | 30 |
| 6.16 Switching Characteristics—3.3-V Supply | 15 | 12.7 Glossary | 31 |
| 6.17 Switching Characteristics—2.5-V Supply | 16 | 13 Mechanical, Packaging, and Orderable Information | 31 |
| 6.18 Insulation Characteristics Curves | 17 | | |

4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.


| Changes from Revision B (November 2017) to Revision C | Page |
|---|----------|
| • Changed the C_{IO} value for the DBQ package from 1.1 to 0.9 pF in the <i>Insulation Specifications</i> table | 7 |

| Changes from Revision A (August 2017) to Revision B | Page |
|---|-----------|
| • Changed the CSA certification wording in the <i>Features</i> and <i>Safety-Related Certifications</i> table | 1 |
| • Changed the isolation voltage for the DBQ-16 package from 2500 to 3000 V_{RMS} | 1 |
| • Added the maximum transient isolation voltage for the DW-16 package of the ISO7761, ISO7762, and ISO7763 devices in the <i>Insulation Specifications</i> and <i>Safety-Related Certifications</i> tables. Also changed the maximum value for the DBQ-16 package from 3600 to 4242 for all devcies | 7 |
| • Changed the table note and table condition for the <i>Safety Limiting Values</i> | 8 |
| • Added the supply current vs data rate graphs for the ISO7761, ISO7762, and ISO7763 in the <i>Typical Characteristics</i> section | 18 |


| Changes from Original (August 2017) to Revision A | Page |
|--|-----------|
| • Deleted EN from the <i>Common-Mode Transient Immunity Test Circuit</i> figure | 21 |
| • Changed the V_{CC1} and V_{CC2} signals in the <i>Typical ISO7761 Circuit Hook-up</i> figure | 27 |

5 Pin Configuration and Functions


ISO7760 DW and DBQ Packages
16-Pin SOIC and SSOP
Top View

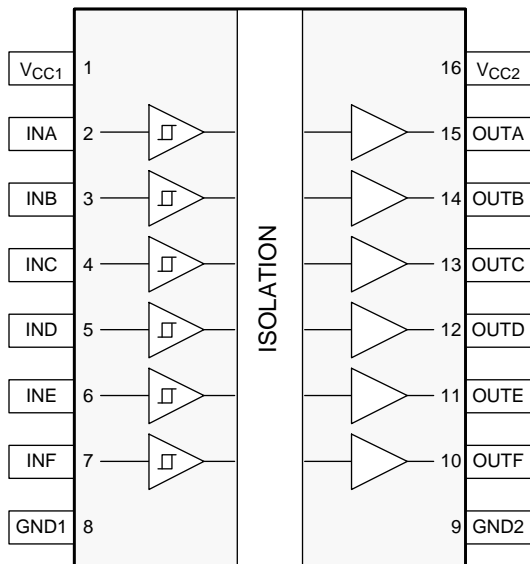


ISO7761 DW and DBQ Packages
16-Pin SOIC and SSOP
Top View

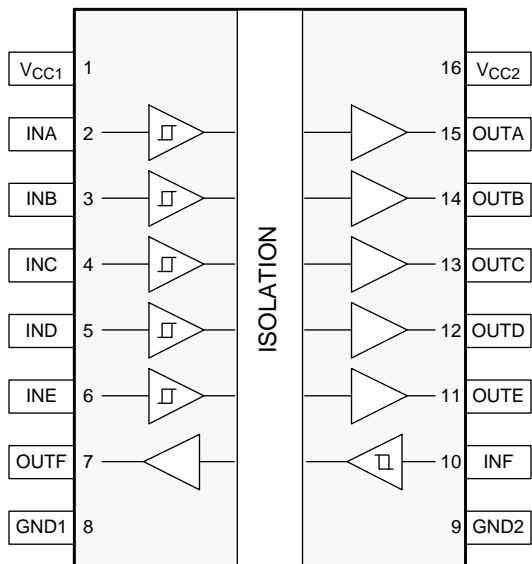

ISO7762 DW and DBQ Packages
16-Pin SOIC and SSOP
Top View

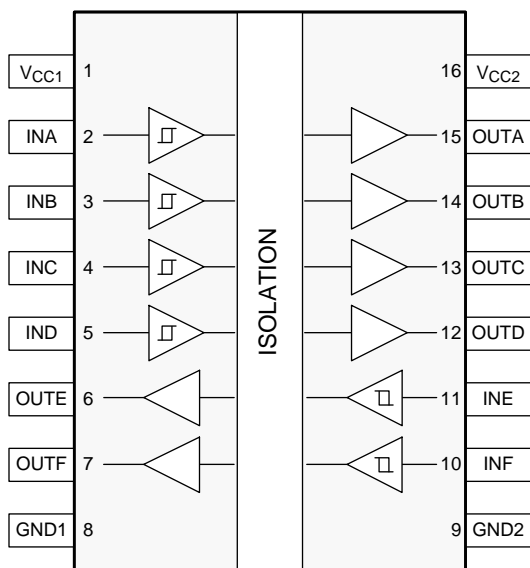

ISO7763 DW and DBQ Packages
16-Pin SOIC and SSOP
Top View

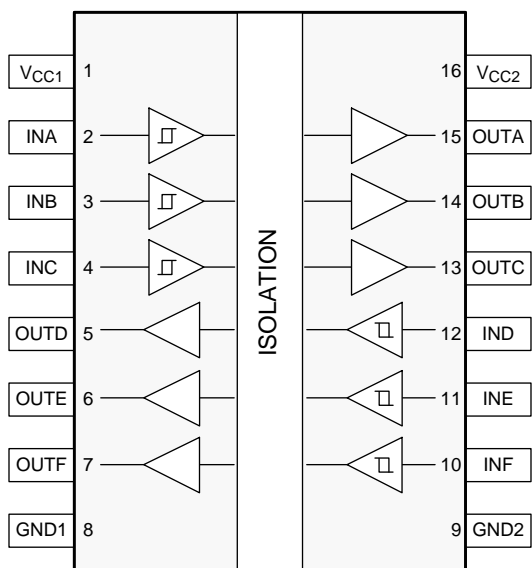

Pin Functions

| NAME | PIN | | | | I/O | DESCRIPTION |
|-----------|---------|---------|---------|---------|-----|---------------------------------|
| | NO. | | | | | |
| | ISO7760 | ISO7761 | ISO7762 | ISO7763 | | |
| GND1 | 8 | 8 | 8 | 8 | — | Ground connection for V_{CC1} |
| GND2 | 9 | 9 | 9 | 9 | — | Ground connection for V_{CC2} |
| INA | 2 | 2 | 2 | 2 | I | Input, channel A |
| INB | 3 | 3 | 3 | 3 | I | Input, channel B |
| INC | 4 | 4 | 4 | 4 | I | Input, channel C |
| IND | 5 | 5 | 5 | 12 | I | Input, channel D |
| INE | 6 | 6 | 11 | 11 | I | Input, channel E |
| INF | 7 | 10 | 10 | 10 | I | Input, channel F |
| OUTA | 15 | 15 | 15 | 15 | O | Output, channel A |
| OUTB | 14 | 14 | 14 | 14 | O | Output, channel B |
| OUTC | 13 | 13 | 13 | 13 | O | Output, channel C |
| OUTD | 12 | 12 | 12 | 5 | O | Output, channel D |
| OUTE | 11 | 11 | 6 | 6 | O | Output, channel E |
| OUTF | 10 | 7 | 7 | 7 | O | Output, channel F |
| V_{CC1} | 1 | 1 | 1 | 1 | — | Power supply, side 1 |
| V_{CC2} | 16 | 16 | 16 | 16 | — | Power supply, side 2 |

6 Specifications

6.1 Absolute Maximum Ratings

 See ⁽¹⁾

| | | MIN | MAX | UNIT |
|--------------------|-------------------------------|------|-----------------------|------|
| V_{CC1}, V_{CC2} | Supply voltage ⁽²⁾ | -0.5 | 6 | V |
| V | Voltage at INx, OUTx | -0.5 | $V_{CCX} + 0.5^{(3)}$ | V |
| I_O | Output current | -15 | 15 | mA |
| T_J | Junction temperature | | 150 | °C |
| T_{stg} | Storage temperature | -65 | 150 | °C |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values except differential I/O bus voltages are with respect to the local ground terminal (GND1 or GND2) and are peak voltage values.
- (3) Maximum voltage must not exceed 6 V

6.2 ESD Ratings

| | | VALUE | UNIT |
|-------------|-------------------------|--|-------|
| $V_{(ESD)}$ | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾ | ±6000 |
| | | Charged device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾ | ±1500 |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

| | | MIN | NOM | MAX | UNIT |
|--------------------|---|------------------------------|-----|----------------------|------|
| V_{CC1}, V_{CC2} | Supply voltage | 2.25 | | 5.5 | V |
| $V_{CC(UVLO+)}$ | UVLO threshold when supply voltage is rising | | 2 | 2.25 | V |
| $V_{CC(UVLO-)}$ | UVLO threshold when supply voltage is falling | 1.7 | 1.8 | | V |
| $V_{HYS(UVLO)}$ | Supply voltage UVLO hysteresis | 100 | 200 | | mV |
| I_{OH} | High-level output current | $V_{CCO}^{(1)} = 5\text{ V}$ | | -4 | mA |
| | | $V_{CCO} = 3.3\text{ V}$ | | -2 | |
| | | $V_{CCO} = 2.5\text{ V}$ | | -1 | |
| I_{OL} | Low-level output current | $V_{CCO} = 5\text{ V}$ | | 4 | mA |
| | | $V_{CCO} = 3.3\text{ V}$ | | 2 | |
| | | $V_{CCO} = 2.5\text{ V}$ | | 1 | |
| V_{IH} | High-level input voltage | $0.7 \times V_{CCI}^{(1)}$ | | V_{CCI} | V |
| V_{IL} | Low-level input voltage | 0 | | $0.3 \times V_{CCI}$ | V |
| DR | Data rate | 0 | | 100 | Mbps |
| T_A | Ambient temperature | -55 | 25 | 125 | °C |

- (1) V_{CCI} = Input-side V_{CC} ; V_{CCO} = Output-side V_{CC} .

6.4 Thermal Information

| THERMAL METRIC ⁽¹⁾ | ISO776x | | UNIT |
|--|-----------|------------|------|
| | DW (SOIC) | DBQ (SSOP) | |
| | 16 PINS | 16 PINS | |
| R _{θJA} Junction-to-ambient thermal resistance | 60.3 | 86.5 | °C/W |
| R _{θJC(top)} Junction-to-case(top) thermal resistance | 24.0 | 26.9 | °C/W |
| R _{θJB} Junction-to-board thermal resistance | 29.3 | 36.6 | °C/W |
| ψ _{JT} Junction-to-top characterization parameter | 3.3 | 1.7 | °C/W |
| ψ _{JB} Junction-to-board characterization parameter | 28.7 | 36.1 | °C/W |
| R _{θJC(bottom)} Junction-to-case(bottom) thermal resistance | n/a | n/a | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics application report](#).

6.5 Power Ratings

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---|--|-----|-----|-----|------|
| ISO7760 | | | | | |
| P _D Maximum power dissipation (both sides) | V _{CC1} = V _{CC2} = 5.5 V, T _J = 150°C, C _L = 15 pF, input a 50-MHz 50% duty cycle square wave | | | 292 | mW |
| P _{D1} Maximum power dissipation (side 1) | V _{CC1} = V _{CC2} = 5.5 V, T _J = 150°C, C _L = 15 pF, input a 50-MHz 50% duty cycle square wave | | | 50 | mW |
| P _{D2} Maximum power dissipation (side 2) | V _{CC1} = V _{CC2} = 5.5 V, T _J = 150°C, C _L = 15 pF, input a 50-MHz 50% duty cycle square wave | | | 242 | mW |
| ISO7761 | | | | | |
| P _D Maximum power dissipation (both sides) | V _{CC1} = V _{CC2} = 5.5 V, T _J = 150°C, C _L = 15 pF, input a 50-MHz 50% duty cycle square wave | | | 292 | mW |
| P _{D1} Maximum power dissipation (side 1) | V _{CC1} = V _{CC2} = 5.5 V, T _J = 150°C, C _L = 15 pF, input a 50-MHz 50% duty cycle square wave | | | 83 | mW |
| P _{D2} Maximum power dissipation (side 2) | V _{CC1} = V _{CC2} = 5.5 V, T _J = 150°C, C _L = 15 pF, input a 50-MHz 50% duty cycle square wave | | | 209 | mW |
| ISO7762 | | | | | |
| P _D Maximum power dissipation (both sides) | V _{CC1} = V _{CC2} = 5.5 V, T _J = 150°C, C _L = 15 pF, input a 50-MHz 50% duty cycle square wave | | | 292 | mW |
| P _{D1} Maximum power dissipation (side 1) | V _{CC1} = V _{CC2} = 5.5 V, T _J = 150°C, C _L = 15 pF, input a 50-MHz 50% duty cycle square wave | | | 116 | mW |
| P _{D2} Maximum power dissipation (side 2) | V _{CC1} = V _{CC2} = 5.5 V, T _J = 150°C, C _L = 15 pF, input a 50-MHz 50% duty cycle square wave | | | 176 | mW |
| ISO7763 | | | | | |
| P _D Maximum power dissipation (both sides) | V _{CC1} = V _{CC2} = 5.5 V, T _J = 150°C, C _L = 15 pF, input a 50-MHz 50% duty cycle square wave | | | 292 | mW |
| P _{D1} Maximum power dissipation (side 1) | V _{CC1} = V _{CC2} = 5.5 V, T _J = 150°C, C _L = 15 pF, input a 50-MHz 50% duty cycle square wave | | | 146 | mW |
| P _{D2} Maximum power dissipation (side 2) | V _{CC1} = V _{CC2} = 5.5 V, T _J = 150°C, C _L = 15 pF, input a 50-MHz 50% duty cycle square wave | | | 146 | mW |

6.6 Insulation Specifications

| PARAMETER | TEST CONDITIONS | VALUE | | UNIT | |
|---|---|---------------------------|-------------------|------------------|-----------------|
| | | DW-16 | DBQ-16 | | |
| CLR External clearance ⁽¹⁾ | Shortest terminal-to-terminal distance through air | >8 | >3.7 | mm | |
| CPG External clearance ⁽¹⁾ | Shortest terminal-to-terminal distance across the package surface | >8 | >3.7 | mm | |
| DTI Distance through the insulation | Minimum internal gap (internal clearance) | >21 | >21 | μm | |
| CTI Tracking resistance (comparative tracking index) | DIN EN 60112 (VDE 0303-11); IEC 60112; UL 746A | >600 | >600 | V | |
| Material group | According to IEC 60664-1 | I | I | | |
| Overvoltage category per IEC 60664-1 | Rated mains voltage ≤ 150 V _{RMS} | I–IV | I–IV | | |
| | Rated mains voltage ≤ 300 V _{RMS} | I–IV | I–III | | |
| | Rated mains voltage ≤ 600 V _{RMS} | I–IV | n/a | | |
| | Rated mains voltage ≤ 1000 V _{RMS} | I–III | n/a | | |
| DIN V VDE V 0884-11:2017-01⁽²⁾ | | | | | |
| V _{IORM} Maximum repetitive peak isolation voltage | AC voltage (bipolar) | 1414 | 566 | V _{PK} | |
| V _{IOWM} Maximum working isolation voltage | AC voltage; Time dependent dielectric breakdown (TDDB) test | 1000 | 400 | V _{RMS} | |
| | DC voltage | 1414 | 566 | V _{DC} | |
| V _{IOTM} Maximum transient isolation voltage | V _{TEST} = V _{IOTM} , t = 60 s (qualification) | ISO7760 | 8000 | 4242 | V _{PK} |
| | V _{TEST} = 1.2 × V _{IOTM} , t = 1 s (100% production) | ISO7761, ISO7762, ISO7763 | 7071 | | |
| V _{IOSM} Maximum surge isolation voltage ⁽³⁾ | Test method per IEC 62368-1, 1.2/50 μs waveform, V _{TEST} = 1.6 × V _{IOSM} (qualification) | 8000 | 4000 | V _{PK} | |
| q _{pd} Apparent charge ⁽⁴⁾ | Method a, After Input/Output safety test subgroup 2/3, V _{ini} = V _{IOTM} , t _{ini} = 60 s; V _{pd(m)} = 1.2 × V _{IORM} , t _m = 10 s | ≤5 | ≤5 | pC | |
| | Method a, After environmental tests subgroup 1, V _{ini} = V _{IOTM} , t _{ini} = 60 s; V _{pd(m)} = 1.6 × V _{IORM} , t _m = 10 s | ≤5 | ≤5 | | |
| | Method b1; At routine test (100% production) and preconditioning (type test) V _{ini} = 1.2 × V _{IOTM} , t _{ini} = 1 s; V _{pd(m)} = 1.875 × V _{IORM} , t _m = 1 s | ≤5 | ≤5 | | |
| C _{IO} Barrier capacitance, input to output ⁽⁵⁾ | V _{IO} = 0.4 × sin (2πft), f = 1 MHz | ~1.1 | ~0.9 | pF | |
| R _{IO} Isolation resistance ⁽⁵⁾ | V _{IO} = 500 V, T _A = 25°C | >10 ¹² | >10 ¹² | Ω | |
| | V _{IO} = 500 V, 100°C ≤ T _A ≤ 125°C | >10 ¹¹ | >10 ¹¹ | | |
| | V _{IO} = 500 V, T _S = 150°C | >10 ⁹ | >10 ⁹ | | |
| Pollution degree | | 2 | 2 | | |
| Climatic category | | 55/125/ 21 | 55/12 5/ 21 | | |
| UL 1577 | | | | | |
| V _{ISO} Withstanding isolation voltage | V _{TEST} = V _{ISO} , t = 60 s (qualification), V _{TEST} = 1.2 × V _{ISO} , t = 1 s (100% production) | 5000 | 3000 | V _{RMS} | |

- Creepage and clearance requirements should be applied according to the specific equipment isolation standards of an application. Care should be taken to maintain the creepage and clearance distance of a board design to ensure that the mounting pads of the isolator on the printed-circuit board do not reduce this distance. Creepage and clearance on a printed-circuit board become equal in certain cases. Techniques such as inserting grooves and/or ribs on a printed circuit board are used to help increase these specifications.
- This coupler is suitable for safe *electrical insulation only* within the safety ratings. Compliance with the safety ratings shall be ensured by means of suitable protective circuits
- Testing is carried out in air or oil to determine the intrinsic surge immunity of the isolation barrier.
- Apparent charge is electrical discharge caused by a partial discharge (pd).
- All pins on each side of the barrier tied together creating a two-terminal device.

6.7 Safety-Related Certifications

| VDE | CSA | UL | CQC | TUV |
|--|---|---|---|---|
| Plan to certify according to DIN V VDE V 0884-11:2017-01 | Plan to certify according to IEC 60950-1, IEC 62368-1 and IEC 60601-1 | Plan to certify according to UL 1577 Component Recognition Program | Plan to certify according to GB 4943.1-2011 | Plan to certify according to EN 61010-1:2010 (3rd Ed) and EN 60950-1:2006/A11:2009/A1:2010/A12:2011/A2:2013 |
| Maximum transient isolation voltage, 8000 V _{PK} (ISO7760 in DW-16), 7071 V _{PK} (ISO7761, ISO7762, ISO7763 in DW-16) and 4242 V _{PK} (DBQ-16); Maximum repetitive peak isolation voltage, 1414 V _{PK} (DW-16) and 566 V _{PK} (DBQ-16); Maximum surge isolation voltage, 8000 V _{PK} (DW-16) and 4000 V _{PK} (DBQ-16) | Reinforced insulation per CSA 60950-1-07+A1+A2 and IEC 60950-1 2nd Ed., 800 V _{RMS} (DW-16) and 370 V _{RMS} (DBQ-16) maximum working voltage (pollution degree 2, material group I); DW-16: 2 MOPP (Means of Patient Protection) per CSA 60601-1:14 and IEC 60601-1 Ed. 3.1, 250 V _{RMS} (DW-16) maximum working voltage | DW-16: Single protection, 5000 V _{RMS} ; DBQ-16: Single protection, 3000 V _{RMS} | DW-16: Reinforced Insulation, Altitude ≤ 5000 m, Tropical Climate, 400 V _{RMS} maximum working voltage; DBQ-16: Basic Insulation, Altitude ≤ 5000 m, Tropical Climate, 250 V _{RMS} maximum working voltage | 5000 V _{RMS} Reinforced insulation per EN 61010-1:2010 (3rd Ed) up to working voltage of 600 V _{RMS} (DW package) 5000 V _{RMS} Reinforced insulation per EN 60950-1:2006/A11:2009/A1:2010/A12:2011/A2:2013 up to working voltage of 800 V _{RMS} (DW package) |
| Certification Planned | Certification Planned | Certification Planned | Certification Planned | Certification Planned |

6.8 Safety Limiting Values

Safety limiting intends to minimize potential damage to the isolation barrier upon failure of input or output circuitry.

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-----------------------|--|--|-----|-----|------|------|
| DW-16 PACKAGE | | | | | | |
| I _S | Safety input, output, or supply current ⁽¹⁾ | R _{θJA} = 60.3 °C/W, V _I = 5.5 V, T _J = 150°C, T _A = 25°C, see Figure 1 | | | 377 | mA |
| | | R _{θJA} = 60.3 °C/W, V _I = 3.6 V, T _J = 150°C, T _A = 25°C, see Figure 1 | | | 576 | |
| | | R _{θJA} = 60.3 °C/W, V _I = 2.75 V, T _J = 150°C, T _A = 25°C, see Figure 1 | | | 754 | |
| P _S | Safety input, output, or total power ⁽¹⁾ | R _{θJA} = 60.3 °C/W, T _J = 150°C, T _A = 25°C, see Figure 3 | | | 2073 | mW |
| T _S | Maximum safety temperature ⁽¹⁾ | | | | 150 | °C |
| DBQ-16 PACKAGE | | | | | | |
| I _S | Safety input, output, or supply current ⁽¹⁾ | R _{θJA} = 86.5 °C/W, V _I = 5.5 V, T _J = 150°C, T _A = 25°C, see Figure 2 | | | 263 | mA |
| | | R _{θJA} = 86.5 °C/W, V _I = 3.6 V, T _J = 150°C, T _A = 25°C, see Figure 2 | | | 401 | |
| | | R _{θJA} = 86.5 °C/W, V _I = 2.75 V, T _J = 150°C, T _A = 25°C, see Figure 2 | | | 525 | |
| P _S | Safety input, output, or total power ⁽¹⁾ | R _{θJA} = 86.5 °C/W, T _J = 150°C, T _A = 25°C, see Figure 4 | | | 1445 | mW |
| T _S | Maximum safety temperature ⁽¹⁾ | | | | 150 | °C |

- (1) The maximum safety temperature, T_S, has the same value as the maximum junction temperature, T_J, specified for the device. The I_S and P_S parameters represent the safety current and safety power respectively. The maximum limits of I_S and P_S should not be exceeded. These limits vary with the ambient temperature, T_A.

The junction-to-air thermal resistance, R_{θJA}, in the [Thermal Information](#) table is that of a device installed on a high-K test board for leaded surface-mount packages. Use these equations to calculate the value for each parameter:

$$T_J = T_A + R_{\theta JA} \times P, \text{ where } P \text{ is the power dissipated in the device.}$$

$$T_{J(max)} = T_S = T_A + R_{\theta JA} \times P_S, \text{ where } T_{J(max)} \text{ is the maximum allowed junction temperature.}$$

$$P_S = I_S \times V_I, \text{ where } V_I \text{ is the maximum input voltage.}$$

6.9 Electrical Characteristics—5-V Supply

$V_{CC1} = V_{CC2} = 5\text{ V} \pm 10\%$ (over recommended operating conditions unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---------------|------------------------------------|--|-----------------------|----------------------|----------------------|-------------------------|
| V_{OH} | High-level output voltage | $I_{OH} = -4\text{ mA}$; see Figure 18 | $V_{CCO}^{(1)} - 0.4$ | 4.8 | | V |
| V_{OL} | Low-level output voltage | $I_{OL} = 4\text{ mA}$; see Figure 18 | | 0.2 | 0.4 | V |
| $V_{IT+(IN)}$ | Rising input threshold voltage | | | $0.6 \times V_{CCI}$ | $0.7 \times V_{CCI}$ | V |
| $V_{IT-(IN)}$ | Falling input threshold voltage | | $0.3 \times V_{CCI}$ | $0.4 \times V_{CCI}$ | | V |
| $V_{I(HYS)}$ | Input threshold voltage hysteresis | | $0.1 \times V_{CCI}$ | $0.2 \times V_{CCI}$ | | V |
| I_{IH} | High-level input current | $V_{IH} = V_{CCI}^{(1)}$ at INx | | | 10 | μA |
| I_{IL} | Low-level input current | $V_{IL} = 0\text{ V}$ at INx | -10 | | | μA |
| CMTI | Common-mode transient immunity | $V_I = V_{CCI}$ or 0 V , $V_{CM} = 1200\text{ V}$; see Figure 20 | 85 | 100 | | $\text{kV}/\mu\text{s}$ |
| C_I | Input capacitance ⁽²⁾ | $V_I = V_{CC} / 2 + 0.4 \times \sin(2\pi ft)$, $f = 1\text{ MHz}$, $V_{CC} = 5\text{ V}$ | | 2 | | pF |

(1) V_{CCI} = Input-side V_{CC} ; V_{CCO} = Output-side V_{CC} .

(2) Measured from input pin to ground.

6.10 Supply Current Characteristics—5-V Supply

$V_{CC1} = V_{CC2} = 5\text{ V} \pm 10\%$ (over recommended operating conditions unless otherwise noted).

| PARAMETER | TEST CONDITIONS | SUPPLY CURRENT | MIN | TYP | MAX | UNIT | |
|----------------------------|--|--------------------|--------------------|-----|------|------|----|
| ISO7760 | | | | | | | |
| Supply current - DC signal | $V_I = V_{CC1}$ (ISO7760); $V_I = 0\text{ V}$ (ISO7760 with F suffix) | I_{CC1} | | 1.6 | 2.3 | mA | |
| | | I_{CC2} | | 3 | 4.9 | | |
| | $V_I = 0\text{ V}$ (ISO7760); $V_I = V_{CC1}$ (ISO7760 with F suffix) | I_{CC1} | | 8 | 11.3 | | |
| | | I_{CC2} | | 3.3 | 5.3 | | |
| Supply current - AC signal | All channels switching with square wave clock input; $C_L = 15\text{ pF}$ | 1 Mbps | I_{CC1} | | 5 | 6.4 | mA |
| | | | I_{CC2} | | 3.5 | 5.6 | |
| | | 10 Mbps | I_{CC1} | | 5.2 | 6.7 | |
| | | | I_{CC2} | | 6.4 | 9 | |
| | | 100 Mbps | I_{CC1} | | 7 | 9 | |
| | | | I_{CC2} | | 35 | 44 | |
| ISO7761 | | | | | | | |
| Supply current - DC signal | $V_I = V_{CCI}^{(1)}$ (ISO7761); $V_I = 0\text{ V}$ (ISO7761 with F suffix) | I_{CC1} | | 1.9 | 2.7 | mA | |
| | | I_{CC2} | | 2.9 | 4.7 | | |
| | $V_I = 0\text{ V}$ (ISO7761); $V_I = V_{CCI}$ (ISO7761 with F suffix) | I_{CC1} | | 7.3 | 10.6 | | |
| | | I_{CC2} | | 4.2 | 6.6 | | |
| Supply current - AC signal | All channels switching with square wave clock input; $C_L = 15\text{ pF}$ | 1 Mbps | I_{CC1} | | 4.7 | 6.4 | mA |
| | | | I_{CC2} | | 3.8 | 5.9 | |
| | | 10 Mbps | I_{CC1} | | 5.3 | 7.2 | |
| | | | I_{CC2} | | 6.3 | 8.8 | |
| | | 100 Mbps | I_{CC1} | | 11.5 | 15 | |
| | | | I_{CC2} | | 30.5 | 38 | |
| ISO7762 | | | | | | | |
| Supply current - DC signal | $V_I = V_{CCI}$ (ISO7762); $V_I = 0\text{ V}$ (ISO7762 with F suffix) | I_{CC1} | | 2.1 | 3.2 | mA | |
| | | I_{CC2} | | 2.6 | 4.2 | | |
| | $V_I = 0\text{ V}$ (ISO7762); $V_I = V_{CCI}$ (ISO7762 with F suffix) | I_{CC1} | | 6.5 | 9.3 | | |
| | | I_{CC2} | | 5 | 7.5 | | |
| Supply current - AC signal | All channels switching with square wave clock input; $C_L = 15\text{ pF}$ | 1 Mbps | I_{CC1} | | 4.5 | 6.3 | mA |
| | | | I_{CC2} | | 4 | 6.1 | |
| | | 10 Mbps | I_{CC1} | | 5.6 | 7.6 | |
| | | | I_{CC2} | | 6 | 8.4 | |
| | | 100 Mbps | I_{CC1} | | 16.5 | 21 | |
| | | | I_{CC2} | | 25.7 | 32 | |
| ISO7763 | | | | | | | |
| Supply current - DC signal | $V_I = V_{CCI}$ (ISO7763); $V_I = 0\text{ V}$ (ISO7763 with F suffix) | I_{CC1}, I_{CC2} | | 2.4 | 3.7 | mA | |
| | $V_I = 0\text{ V}$ (ISO7763); $V_I = V_{CCI}$ (ISO7763 with F suffix) | I_{CC1}, I_{CC2} | | 5.7 | 8.6 | | |
| Supply current - AC signal | All channels switching with square wave clock input; $C_L = 15\text{ pF}$ | 1 Mbps | I_{CC1}, I_{CC2} | | 4.2 | 6.1 | mA |
| | | 10 Mbps | I_{CC1}, I_{CC2} | | 5.8 | 8 | |
| | | 100 Mbps | I_{CC1}, I_{CC2} | | 21 | 26.5 | |

(1) $V_{CCI} = \text{Input-side } V_{CC}$

6.11 Electrical Characteristics—3.3-V Supply

$V_{CC1} = V_{CC2} = 3.3\text{ V} \pm 10\%$ (over recommended operating conditions unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---------------|------------------------------------|--|-----------------------|----------------------|----------------------|-------------------------|
| V_{OH} | High-level output voltage | $I_{OH} = -2\text{ mA}$; see Figure 18 | $V_{CCO}^{(1)} - 0.3$ | 3.2 | | V |
| V_{OL} | Low-level output voltage | $I_{OL} = 2\text{ mA}$; see Figure 18 | | 0.1 | 0.3 | V |
| $V_{IT+(IN)}$ | Rising input threshold voltage | | | $0.6 \times V_{CCI}$ | $0.7 \times V_{CCI}$ | V |
| $V_{IT-(IN)}$ | Falling input threshold voltage | | $0.3 \times V_{CCI}$ | $0.4 \times V_{CCI}$ | | V |
| $V_{I(HYS)}$ | Input threshold voltage hysteresis | | $0.1 \times V_{CCI}$ | $0.2 \times V_{CCI}$ | | V |
| I_{IH} | High-level input current | $V_{CCI(H)} = V^{(1)}$ at INx | | | 10 | μA |
| I_{IL} | Low-level input current | $V_{IL} = 0\text{ V}$ at INx | -10 | | | μA |
| CMTI | Common-mode transient immunity | $V_I = V_{CCI}$ or 0 V , $V_{CM} = 1200\text{ V}$; see Figure 20 | 85 | 100 | | $\text{kV}/\mu\text{s}$ |

(1) V_{CCI} = Input-side V_{CC} ; V_{CCO} = Output-side V_{CC} .

6.12 Supply Current Characteristics—3.3-V Supply

$V_{CC1} = V_{CC2} = 3.3\text{ V} \pm 10\%$ (over recommended operating conditions unless otherwise noted).

| PARAMETER | TEST CONDITIONS | SUPPLY CURRENT | MIN | TYP | MAX | UNIT | |
|----------------------------|--|--------------------|--------------------|-----|------|------|----|
| ISO7760 | | | | | | | |
| Supply current - DC signal | $V_I = V_{CC1}$ (ISO7760); $V_I = 0\text{ V}$ (ISO7760 with F suffix) | I_{CC1} | | 1.6 | 2.2 | mA | |
| | | I_{CC2} | | 3 | 4.8 | | |
| | $V_I = 0\text{ V}$ (ISO7760); $V_I = V_{CC1}$ (ISO7760 with F suffix) | I_{CC1} | | 8 | 11.4 | | |
| | | I_{CC2} | | 3.3 | 5.3 | | |
| Supply current - AC signal | All channels switching with square wave clock input; $C_L = 15\text{ pF}$ | 1 Mbps | I_{CC1} | | 4.9 | 6.6 | mA |
| | | | I_{CC2} | | 3.4 | 5.3 | |
| | | 10 Mbps | I_{CC1} | | 5 | 6.7 | |
| | | | I_{CC2} | | 5.5 | 7.8 | |
| | | 100 Mbps | I_{CC1} | | 6.3 | 8.2 | |
| | | | I_{CC2} | | 26 | 33 | |
| ISO7761 | | | | | | | |
| Supply current - DC signal | $V_I = V_{CCI}^{(1)}$ (ISO7761); $V_I = 0\text{ V}$ (ISO7761 with F suffix) | I_{CC1} | | 1.8 | 2.7 | mA | |
| | | I_{CC2} | | 2.9 | 4.7 | | |
| | $V_I = 0\text{ V}$ (ISO7761); $V_I = V_{CCI}$ (ISO7761 with F suffix) | I_{CC1} | | 7.2 | 10.3 | | |
| | | I_{CC2} | | 4.2 | 6.6 | | |
| Supply current - AC signal | All channels switching with square wave clock input; $C_L = 15\text{ pF}$ | 1 Mbps | I_{CC1} | | 4.6 | 6.5 | mA |
| | | | I_{CC2} | | 3.7 | 5.7 | |
| | | 10 Mbps | I_{CC1} | | 5.1 | 7 | |
| | | | I_{CC2} | | 5.5 | 7.8 | |
| | | 100 Mbps | I_{CC1} | | 9.4 | 12 | |
| | | | I_{CC2} | | 22.8 | 29 | |
| ISO7762 | | | | | | | |
| Supply current - DC signal | $V_I = V_{CCI}$ (ISO7762); $V_I = 0\text{ V}$ (ISO7762 with F suffix) | I_{CC1} | | 2.1 | 3.2 | mA | |
| | | I_{CC2} | | 2.5 | 4.2 | | |
| | $V_I = 0\text{ V}$ (ISO7762); $V_I = V_{CCI}$ (ISO7762 with F suffix) | I_{CC1} | | 6.5 | 9.4 | | |
| | | I_{CC2} | | 5 | 7.5 | | |
| Supply current - AC signal | All channels switching with square wave clock input; $C_L = 15\text{ pF}$ | 1 Mbps | I_{CC1} | | 4.4 | 6.2 | mA |
| | | | I_{CC2} | | 3.9 | 5.8 | |
| | | 10 Mbps | I_{CC1} | | 5.2 | 7.1 | |
| | | | I_{CC2} | | 5.4 | 7.5 | |
| | | 100 Mbps | I_{CC1} | | 12.9 | 16.5 | |
| | | | I_{CC2} | | 19.5 | 25 | |
| ISO7763 | | | | | | | |
| Supply current - DC signal | $V_I = V_{CCI}$ (ISO7763); $V_I = 0\text{ V}$ (ISO7763 with F suffix) | I_{CC1}, I_{CC2} | | 2.4 | 3.7 | mA | |
| | $V_I = 0\text{ V}$ (ISO7763); $V_I = V_{CCI}$ (ISO7763 with F suffix) | I_{CC1}, I_{CC2} | | 5.7 | 8.4 | | |
| Supply current - AC signal | All channels switching with square wave clock input; $C_L = 15\text{ pF}$ | 1 Mbps | I_{CC1}, I_{CC2} | | 4.2 | 6.2 | mA |
| | | 10 Mbps | I_{CC1}, I_{CC2} | | 5.2 | 7.5 | |
| | | 100 Mbps | I_{CC1}, I_{CC2} | | 16 | 20.5 | |

(1) $V_{CCI} = \text{Input-side } V_{CC}$

6.13 Electrical Characteristics—2.5-V Supply

$V_{CC1} = V_{CC2} = 2.5\text{ V} \pm 10\%$ (over recommended operating conditions unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---------------|------------------------------------|--|-----------------------|----------------------|----------------------|-------------------------|
| V_{OH} | High-level output voltage | $I_{OH} = -1\text{ mA}$; see Figure 18 | $V_{CCO}^{(1)} - 0.2$ | 2.45 | | V |
| V_{OL} | Low-level output voltage | $I_{OL} = 1\text{ mA}$; see Figure 18 | | 0.05 | 0.2 | V |
| $V_{IT+(IN)}$ | Rising input threshold voltage | | | $0.6 \times V_{CCI}$ | $0.7 \times V_{CCI}$ | V |
| $V_{IT-(IN)}$ | Falling input threshold voltage | | $0.3 \times V_{CCI}$ | $0.4 \times V_{CCI}$ | | V |
| $V_{I(HYS)}$ | Input threshold voltage hysteresis | | $0.1 \times V_{CCI}$ | $0.2 \times V_{CCI}$ | | V |
| I_{IH} | High-level input current | $V_{IH} = V_{CCI}^{(1)}$ at INx | | | 10 | μA |
| I_{IL} | Low-level input current | $V_{IL} = 0\text{ V}$ at INx | -10 | | | μA |
| CMTI | Common-mode transient immunity | $V_I = V_{CCI}$ or 0 V , $V_{CM} = 1200\text{ V}$; see Figure 20 | 85 | 100 | | $\text{kV}/\mu\text{s}$ |

(1) V_{CCI} = Input-side V_{CC} ; V_{CCO} = Output-side V_{CC} .

6.14 Supply Current Characteristics—2.5-V Supply

$V_{CC1} = V_{CC2} = 2.5\text{ V} \pm 10\%$ (over recommended operating conditions unless otherwise noted).

| PARAMETER | TEST CONDITIONS | SUPPLY CURRENT | MIN | TYP | MAX | UNIT | |
|----------------------------|--|--------------------|--------------------|-----|------|------|----|
| ISO7760 | | | | | | | |
| Supply current - DC signal | $V_I = V_{CC1}$ (ISO7760); $V_I = 0\text{ V}$ (ISO7760 with F suffix) | I_{CC1} | | 1.6 | 2.2 | mA | |
| | | I_{CC2} | | 3 | 4.8 | | |
| | $V_I = 0\text{ V}$ (ISO7760); $V_I = V_{CC1}$ (ISO7760 with F suffix) | I_{CC1} | | 8 | 11.6 | | |
| | | I_{CC2} | | 3.3 | 5.3 | | |
| Supply current - AC signal | All channels switching with square wave clock input; $C_L = 15\text{ pF}$ | 1 Mbps | I_{CC1} | | 4.9 | 6.8 | mA |
| | | | I_{CC2} | | 3.4 | 5.3 | |
| | | 10 Mbps | I_{CC1} | | 5 | 7 | |
| | | | I_{CC2} | | 4.9 | 7.2 | |
| | | 100 Mbps | I_{CC1} | | 6 | 8 | |
| | | | I_{CC2} | | 20.3 | 26 | |
| ISO7761 | | | | | | | |
| Supply current - DC signal | $V_I = V_{CCI}^{(1)}$ (ISO7761); $V_I = 0\text{ V}$ (ISO7761 with F suffix) | I_{CC1} | | 1.8 | 2.7 | mA | |
| | | I_{CC2} | | 2.9 | 4.6 | | |
| | $V_I = 0\text{ V}$ (ISO7761); $V_I = V_{CCI}$ (ISO7761 with F suffix) | I_{CC1} | | 7.2 | 10.3 | | |
| | | I_{CC2} | | 4.2 | 6.5 | | |
| Supply current - AC signal | All channels switching with square wave clock input; $C_L = 15\text{ pF}$ | 1 Mbps | I_{CC1} | | 4.6 | 6.7 | mA |
| | | | I_{CC2} | | 3.7 | 5.8 | |
| | | 10 Mbps | I_{CC1} | | 4.9 | 7.1 | |
| | | | I_{CC2} | | 5 | 7.3 | |
| | | 100 Mbps | I_{CC1} | | 8.3 | 10.7 | |
| | | | I_{CC2} | | 18.1 | 24 | |
| ISO7762 | | | | | | | |
| Supply current - DC signal | $V_I = V_{CCI}$ (ISO7762); $V_I = 0\text{ V}$ (ISO7762 with F suffix) | I_{CC1} | | 2.1 | 3.2 | mA | |
| | | I_{CC2} | | 2.6 | 4.1 | | |
| | $V_I = 0\text{ V}$ (ISO7762); $V_I = V_{CCI}$ (ISO7762 with F suffix) | I_{CC1} | | 6.5 | 9.6 | | |
| | | I_{CC2} | | 4.9 | 7.5 | | |
| Supply current - AC signal | All channels switching with square wave clock input; $C_L = 15\text{ pF}$ | 1 Mbps | I_{CC1} | | 4.4 | 6.4 | mA |
| | | | I_{CC2} | | 3.9 | 5.8 | |
| | | 10 Mbps | I_{CC1} | | 5 | 7.1 | |
| | | | I_{CC2} | | 5 | 7.1 | |
| | | 100 Mbps | I_{CC1} | | 10.9 | 14.1 | |
| | | | I_{CC2} | | 15.6 | 20.1 | |
| ISO7763 | | | | | | | |
| Supply current - DC signal | $V_I = V_{CCI}$ (ISO7763); $V_I = 0\text{ V}$ (ISO7763 with F suffix) | I_{CC1}, I_{CC2} | | 2.3 | 3.7 | mA | |
| | $V_I = 0\text{ V}$ (ISO7763); $V_I = V_{CCI}$ (ISO7763 with F suffix) | I_{CC1}, I_{CC2} | | 5.7 | 8.4 | | |
| Supply current - AC signal | All channels switching with square wave clock input; $C_L = 15\text{ pF}$ | 1 Mbps | I_{CC1}, I_{CC2} | | 4.1 | 6.1 | mA |
| | | 10 Mbps | I_{CC1}, I_{CC2} | | 4.9 | 7.1 | |
| | | 100 Mbps | I_{CC1}, I_{CC2} | | 13 | 17 | |

(1) $V_{CCI} = \text{Input-side } V_{CC}$

6.15 Switching Characteristics—5-V Supply

 $V_{CC1} = V_{CC2} = 5\text{ V} \pm 10\%$ (over recommended operating conditions unless otherwise noted)

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---|---|-----|-----|-----|---------------|
| t_{PLH} , t_{PHL} Propagation delay time | See Figure 18 | 6 | 11 | 16 | ns |
| PWD Pulse width distortion ⁽¹⁾ $ t_{PHL} - t_{PLH} $ | | | 0.4 | 4.9 | ns |
| $t_{sk(o)}$ Channel-to-channel output skew time ⁽²⁾ | Same-direction channels | | | 4 | ns |
| $t_{sk(pp)}$ Part-to-part skew time ⁽³⁾ | | | | 4.5 | ns |
| t_r Output signal rise time | See Figure 18 | | 1.1 | 3.9 | ns |
| t_f Output signal fall time | | | | 1.4 | 3.9 |
| t_{DO} Default output delay time from input power loss | Measured from the time V_{CC} goes below 1.7 V. See Figure 19 | | 0.2 | 0.3 | μs |
| t_{ie} Time interval error | $2^{16} - 1$ PRBS data at 100 Mbps | | 1.3 | | ns |

- (1) Also known as pulse skew.
- (2) $t_{sk(o)}$ is the skew between outputs of a single device with all driving inputs connected together and the outputs switching in the same direction while driving identical loads.
- (3) $t_{sk(pp)}$ is the magnitude of the difference in propagation delay times between any terminals of different devices switching in the same direction while operating at identical supply voltages, temperature, input signals and loads.

6.16 Switching Characteristics—3.3-V Supply

 $V_{CC1} = V_{CC2} = 3.3\text{ V} \pm 10\%$ (over recommended operating conditions unless otherwise noted)

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---|---|-----|-----|-----|---------------|
| t_{PLH} , t_{PHL} Propagation delay time | See Figure 18 | 6 | 12 | 16 | ns |
| PWD Pulse width distortion ⁽¹⁾ $ t_{PHL} - t_{PLH} $ | | | | 0.5 | 5 |
| $t_{sk(o)}$ Channel-to-channel output skew time ⁽²⁾ | Same-direction channels | | | 4.1 | ns |
| $t_{sk(pp)}$ Part-to-part skew time ⁽³⁾ | | | | 4.5 | ns |
| t_r Output signal rise time | See Figure 18 | | 1 | 3 | ns |
| t_f Output signal fall time | | | | 1 | 3 |
| t_{DO} Default output delay time from input power loss | Measured from the time V_{CC} goes below 1.7 V. See Figure 19 | | 0.2 | 0.3 | μs |
| t_{ie} Time interval error | $2^{16} - 1$ PRBS data at 100 Mbps | | 1.3 | | ns |

- (1) Also known as pulse skew.
- (2) $t_{sk(o)}$ is the skew between outputs of a single device with all driving inputs connected together and the outputs switching in the same direction while driving identical loads.
- (3) $t_{sk(pp)}$ is the magnitude of the difference in propagation delay times between any terminals of different devices switching in the same direction while operating at identical supply voltages, temperature, input signals and loads.

6.17 Switching Characteristics—2.5-V Supply

$V_{CC1} = V_{CC2} = 2.5 \text{ V} \pm 10\%$ (over recommended operating conditions unless otherwise noted)

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---|---|-----|-----|------|---------------|
| t_{PLH} , t_{PHL} Propagation delay time | See Figure 18 | 7.5 | 13 | 18.5 | ns |
| PWD Pulse width distortion ⁽¹⁾ $ t_{PHL} - t_{PLH} $ | | | 0.6 | 5.1 | ns |
| $t_{sk(o)}$ Channel-to-channel output skew time ⁽²⁾ | Same-direction channels | | | 4.1 | ns |
| $t_{sk(pp)}$ Part-to-part skew time ⁽³⁾ | | | | 4.6 | ns |
| t_r Output signal rise time | See Figure 18 | | 1 | 3.5 | ns |
| t_f Output signal fall time | | | | 1 | 3.5 |
| t_{DO} Default output delay time from input power loss | Measured from the time V_{CC} goes below 1.7 V. See Figure 19 | | 0.1 | 0.3 | μs |
| t_{ie} Time interval error | $2^{16} - 1$ PRBS data at 100 Mbps | | 1.3 | | ns |

- (1) Also known as pulse skew.
- (2) $t_{sk(o)}$ is the skew between outputs of a single device with all driving inputs connected together and the outputs switching in the same direction while driving identical loads.
- (3) $t_{sk(pp)}$ is the magnitude of the difference in propagation delay times between any terminals of different devices switching in the same direction while operating at identical supply voltages, temperature, input signals and loads.

6.18 Insulation Characteristics Curves

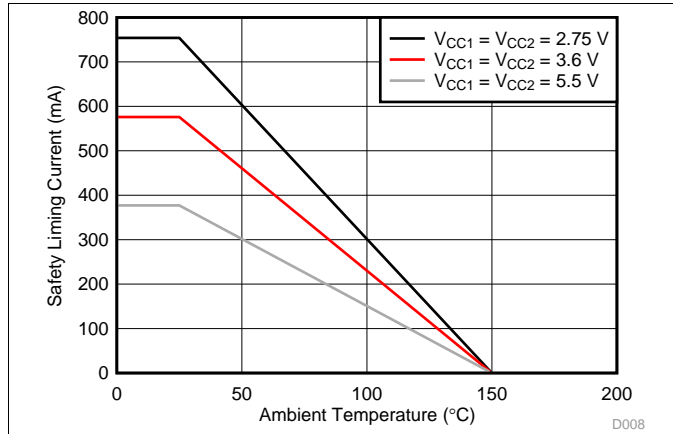


Figure 1. Thermal Derating Curve for Limiting Current per VDE for DW-16 Package

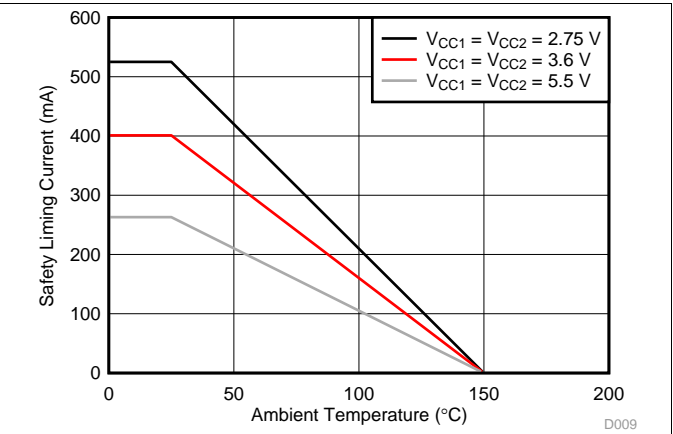


Figure 2. Thermal Derating Curve for Limiting Current per VDE for DBQ-16 Package

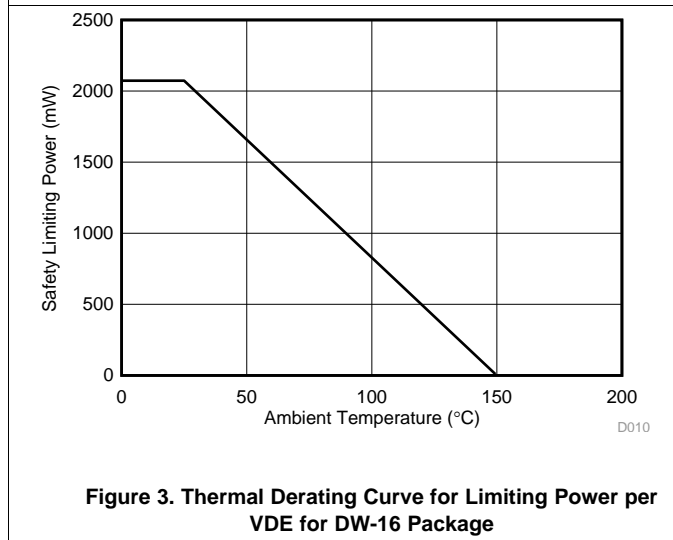


Figure 3. Thermal Derating Curve for Limiting Power per VDE for DW-16 Package

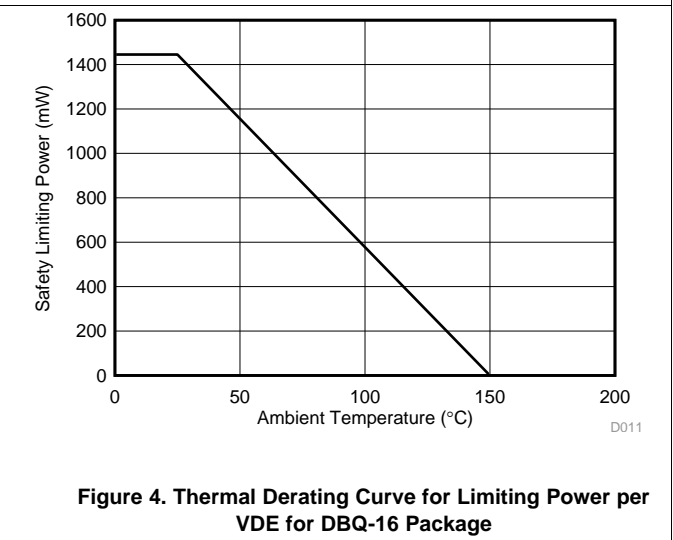


Figure 4. Thermal Derating Curve for Limiting Power per VDE for DBQ-16 Package

6.19 Typical Characteristics

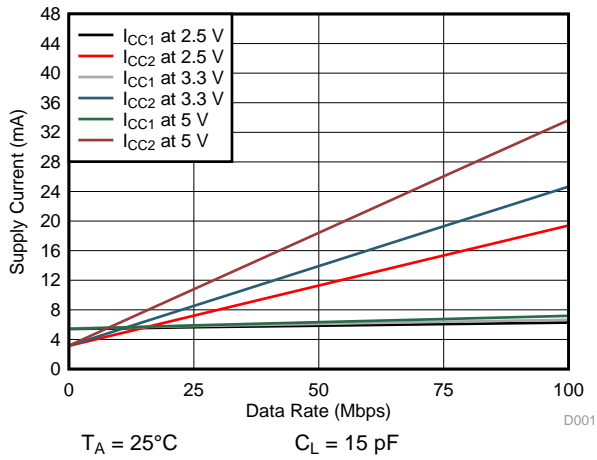


Figure 5. ISO7760 Supply Current vs Data Rate (With 15-pF Load)

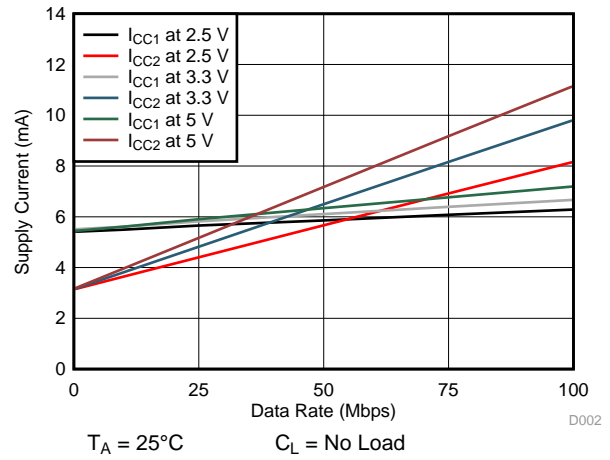


Figure 6. ISO7760 Supply Current vs Data Rate (With No Load)

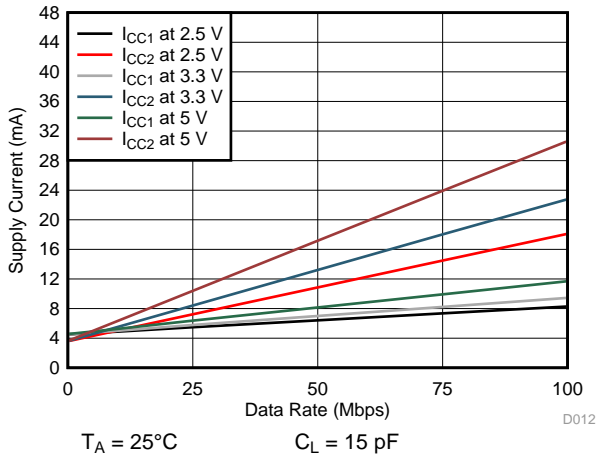


Figure 7. ISO7761 Supply Current vs Data Rate (With 15-pF Load)

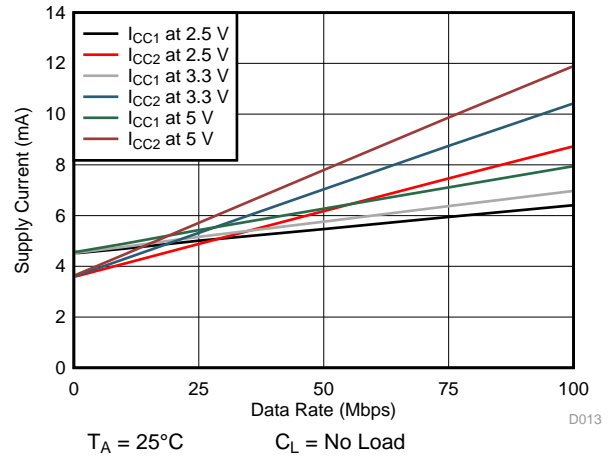


Figure 8. ISO7761 Supply Current vs Data Rate (With No Load)

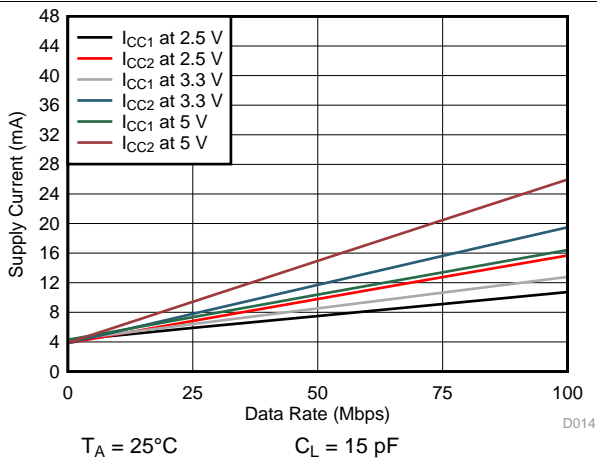


Figure 9. ISO7762 Supply Current vs Data Rate (With 15-pF Load)








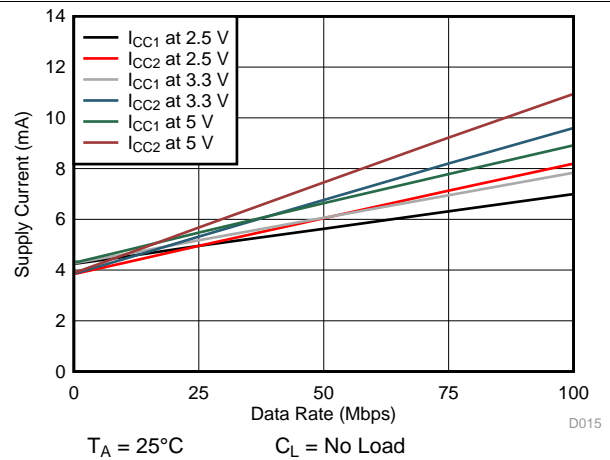


Figure 10. ISO7762 Supply Current vs Data Rate (With No Load)


Typical Characteristics (continued)

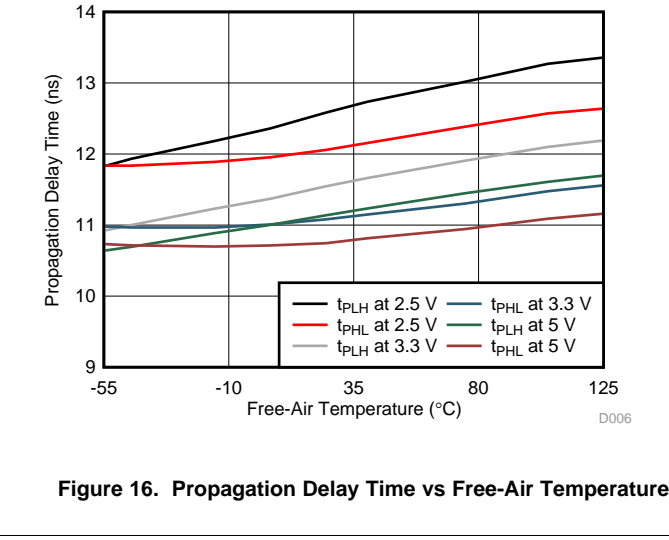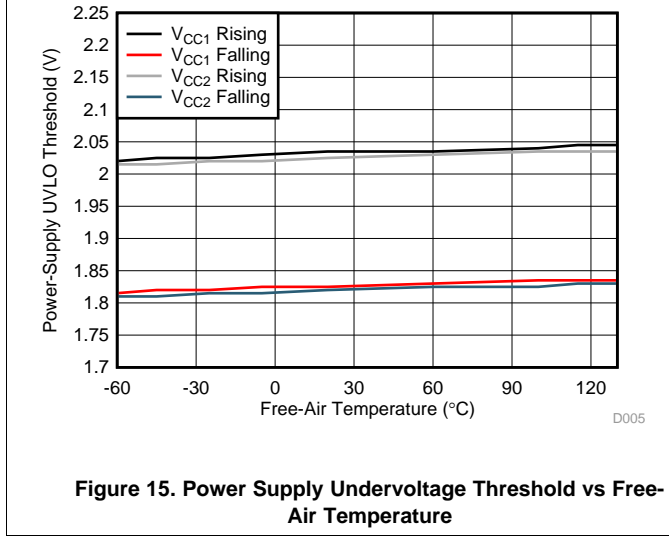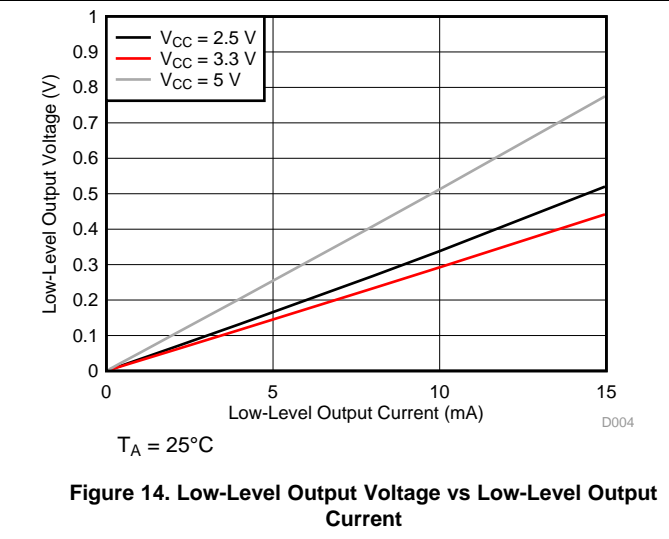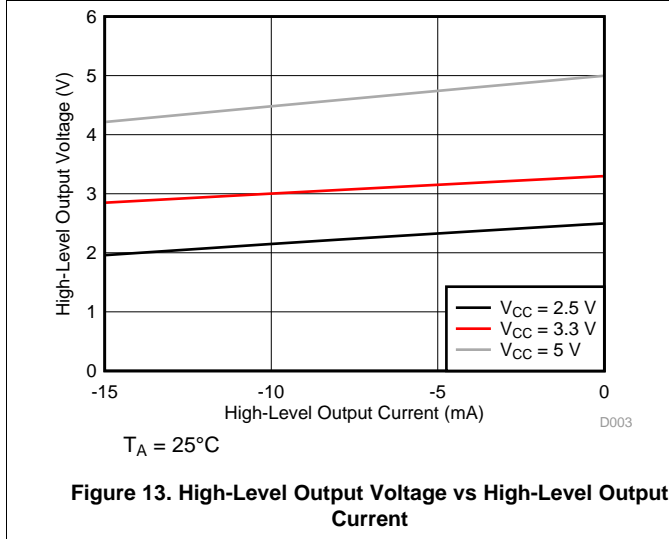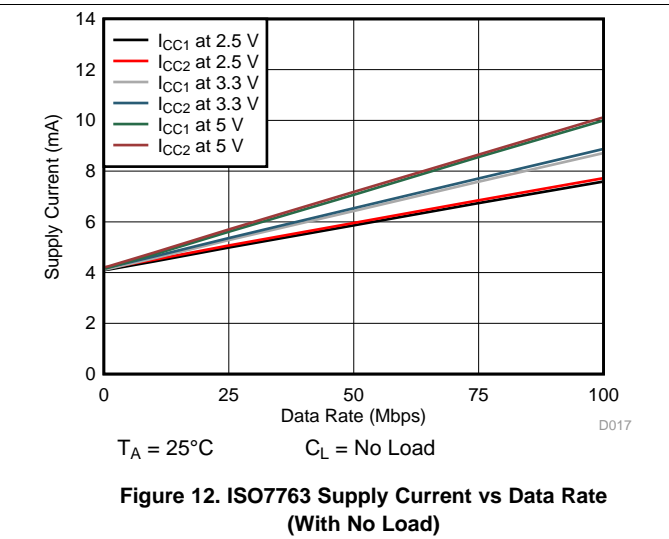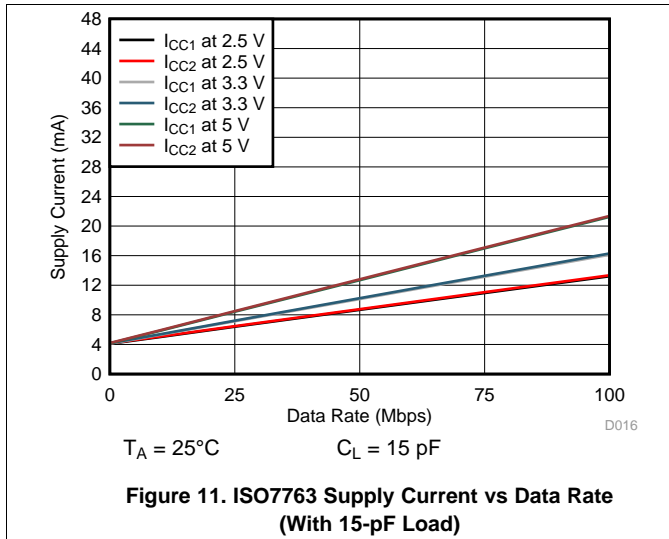

Typical Characteristics (continued)

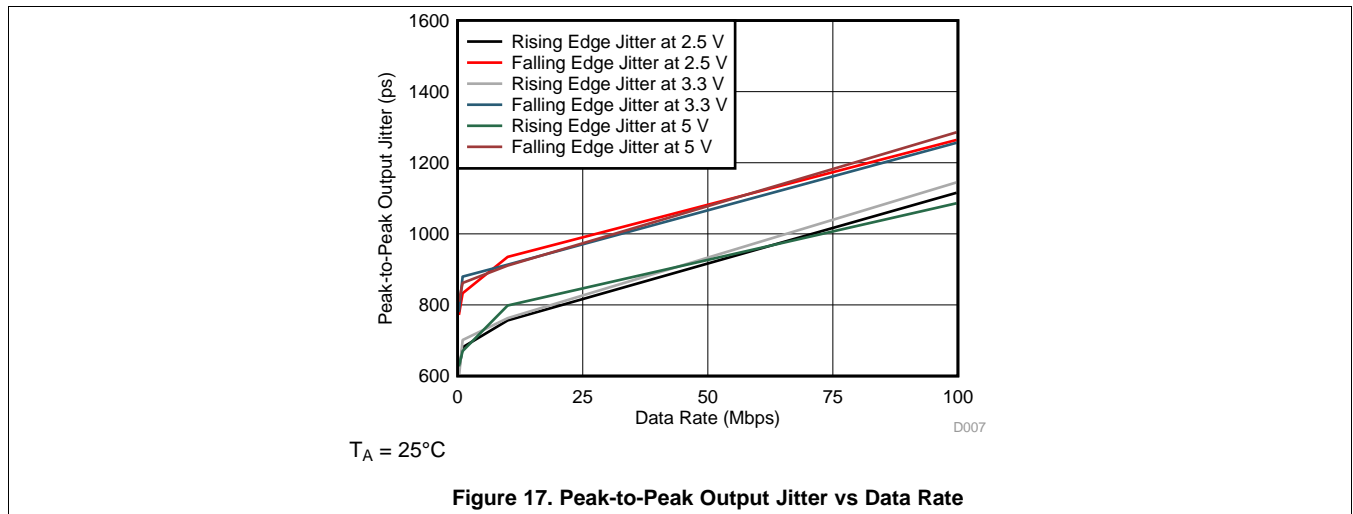


7 Parameter Measurement Information

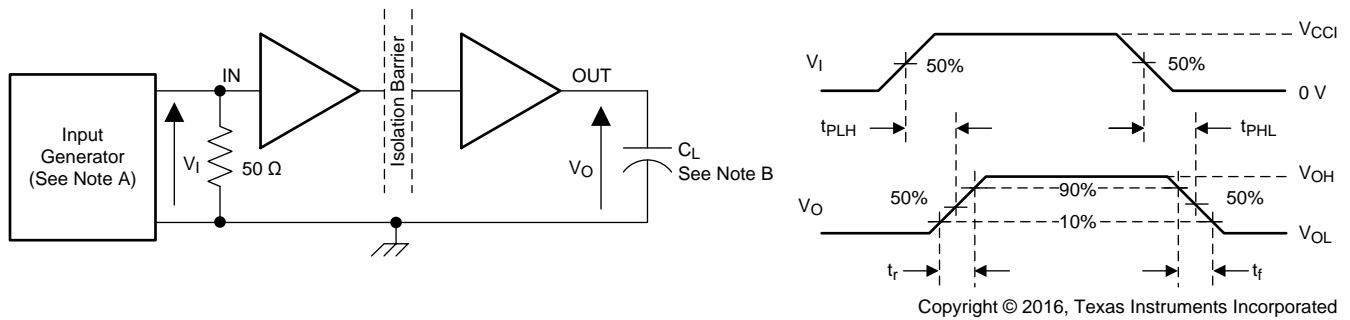


- A. The input pulse is supplied by a generator having the following characteristics: PRR \leq 50 kHz, 50% duty cycle, $t_r \leq 3$ ns, $t_f \leq 3$ ns, $Z_O = 50 \Omega$. At the input, a 50- Ω resistor is required to terminate Input Generator signal. It is not needed in actual application.
- B. $C_L = 15$ pF and includes instrumentation and fixture capacitance within $\pm 20\%$.

Figure 18. Switching Characteristics Test Circuit and Voltage Waveforms

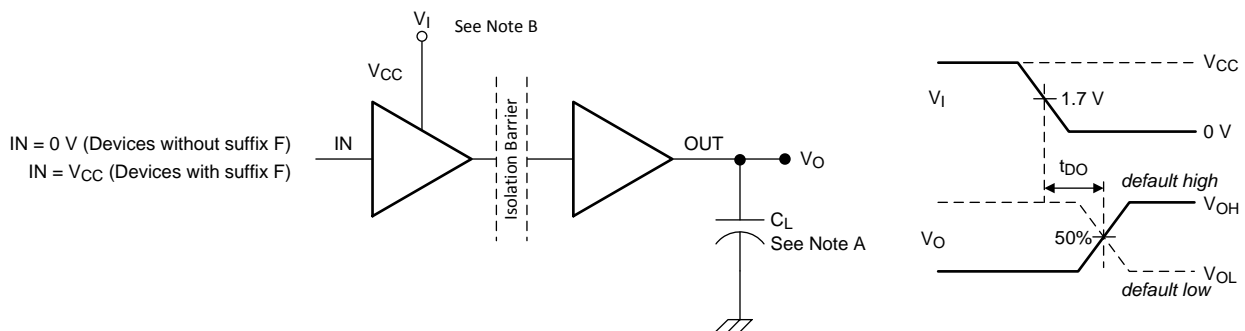

- A. $C_L = 15$ pF and includes instrumentation and fixture capacitance within $\pm 20\%$.
- B. Power-supply ramp rate = 10 mV/ns

Figure 19. Default Output Delay Time Test Circuit and Voltage Waveforms

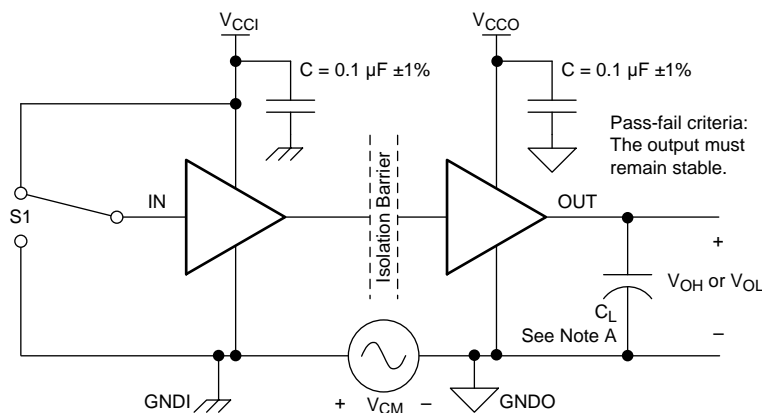

- A. $C_L = 15$ pF and includes instrumentation and fixture capacitance within $\pm 20\%$.


Figure 20. Common-Mode Transient Immunity Test Circuit

8 Detailed Description

8.1 Overview

The ISO776x family of devices uses an ON-OFF keying (OOK) modulation scheme to transmit the digital data across a silicon-dioxide based isolation barrier. The transmitter sends a high-frequency carrier across the barrier to represent one digital state and sends no signal to represent the other digital state. The receiver demodulates the signal after advanced signal conditioning and produces the output through a buffer stage. The ISO776x family of devices also incorporates advanced circuit techniques to maximize the CMTI performance and minimize the radiated emissions because of the high-frequency carrier and IO buffer switching. The conceptual block diagram of a typical channel, [Figure 21](#), shows a functional block diagram of a typical channel. [Figure 22](#) shows a conceptual detail of how the ON-OFF keying scheme works.

8.2 Functional Block Diagram

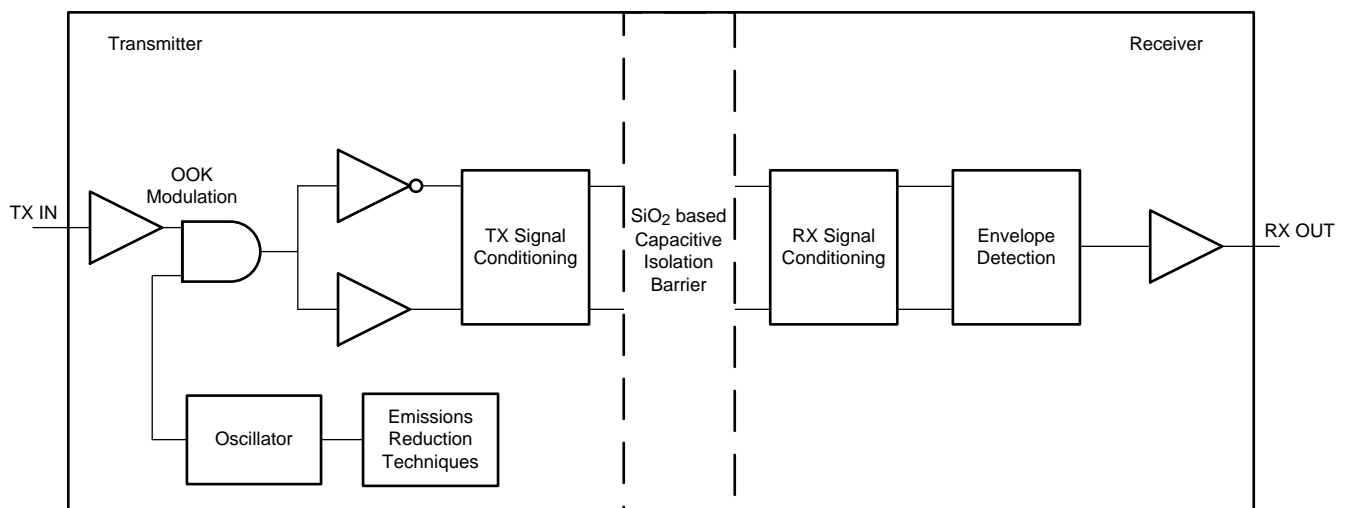

Copyright © 2016, Texas Instruments Incorporated

Figure 21. Conceptual Block Diagram of a Digital Capacitive Isolator

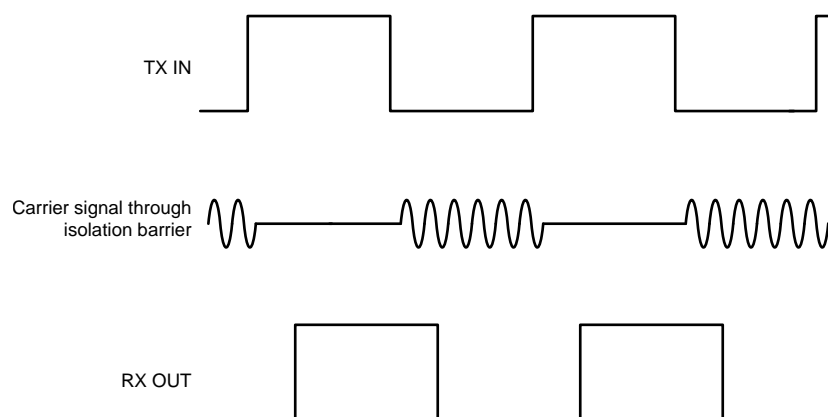


Figure 22. ON-OFF Keying (OOK) Based Modulation Scheme

8.3 Feature Description

Table 1 lists the device features.

Table 1. Device Features

| PART NUMBER | CHANNEL DIRECTION | MAXIMUM DATA RATE | DEFAULT OUTPUT | PACKAGE | RATED ISOLATION ⁽¹⁾ |
|-----------------------|-------------------------|-------------------|----------------|---------|--|
| ISO7760 | 6 Forward, 0 Reverse | 100 Mbps | High | DW-16 | 5000 V _{RMS} / 8000 V _{PK} |
| | | | | DBQ-16 | 3000 V _{RMS} / 4242 V _{PK} |
| ISO7760 with F suffix | 6 Forward, 0 Reverse | 100 Mbps | Low | DW-16 | 5000 V _{RMS} / 8000 V _{PK} |
| | | | | DBQ-16 | 3000 V _{RMS} / 4242 V _{PK} |
| ISO7761 | 5 Forward, 1 Reverse | 100 Mbps | High | DW-16 | 5000 V _{RMS} / 7071 V _{PK} |
| | | | | DBQ-16 | 3000 V _{RMS} / 4242 V _{PK} |
| ISO7761 with F suffix | 5 Forward, 1 Reverse | 100 Mbps | Low | DW-16 | 5000 V _{RMS} / 7071 V _{PK} |
| | | | | DBQ-16 | 3000 V _{RMS} / 4242 V _{PK} |
| ISO7762 | 4 Forward, 2 Reverse | 100 Mbps | High | DW-16 | 5000 V _{RMS} / 7071 V _{PK} |
| | | | | DBQ-16 | 3000 V _{RMS} / 4242 V _{PK} |
| ISO7762 with F suffix | 4 Forward, 2 Reverse | 100 Mbps | Low | DW-16 | 5000 V _{RMS} / 7071 V _{PK} |
| | | | | DBQ-16 | 3000 V _{RMS} / 4242 V _{PK} |
| ISO7763 | 3 Forward, 3 Reverse | 100 Mbps | High | DW-16 | 5000 V _{RMS} / 7071 V _{PK} |
| | | | | DBQ-16 | 3000 V _{RMS} / 4242 V _{PK} |
| ISO7763 with F suffix | 3 Forward, 3 Reverse | 100 Mbps | Low | DW-16 | 5000 V _{RMS} / 7071 V _{PK} |
| | | | | DBQ-16 | 3000 V _{RMS} / 4242 V _{PK} |

(1) See Table 2 for detailed isolation ratings.

8.3.1 Electromagnetic Compatibility (EMC) Considerations

Many applications in harsh industrial environment are sensitive to disturbances such as electrostatic discharge (ESD), electrical fast transient (EFT), surge and electromagnetic emissions. These electromagnetic disturbances are regulated by international standards such as IEC 61000-4-x and CISPR 22. Although system-level performance and reliability depends, to a large extent, on the application board design and layout, the ISO776x family of devices incorporates many chip-level design improvements for overall system robustness. Some of these improvements include:

- Robust ESD protection for input and output signal pins and inter-chip bond pads.
- Low-resistance connectivity of ESD cells to supply and ground pins.
- Enhanced performance of high voltage isolation capacitor for better tolerance of ESD, EFT and surge events.
- Bigger on-chip decoupling capacitors to bypass undesirable high energy signals through a low impedance path.
- PMOS and NMOS devices isolated from each other by using guard rings to avoid triggering of parasitic SCRs.
- Reduced common mode currents across the isolation barrier by ensuring purely differential internal operation.

8.4 Device Functional Modes


Table 2 lists the functional modes for the ISO776x.

Table 2. Function Table ⁽¹⁾

| V _{CCI} | V _{CCO} | INPUT (IN _x) ⁽²⁾ | OUTPUT (OUT _x) | COMMENTS |
|------------------|------------------|---|----------------------------|---|
| PU | PU | H | H | Normal Operation: A channel output assumes the logic state of the input. |
| | | L | L | |
| | | Open | Default | Default mode: When IN _x is open, the corresponding channel output goes to its default logic state. Default is <i>High</i> for ISO776x and <i>Low</i> for ISO776x with F suffix. |
| PD | PU | X | Default | Default mode: When V _{CCI} is unpowered, a channel output assumes the logic state based on the selected default option. Default is <i>High</i> for ISO776x and <i>Low</i> for ISO776x with F suffix. When V _{CCI} transitions from unpowered to powered-up, a channel output assumes the logic state of its input. When V _{CCI} transitions from powered-up to unpowered, channel output assumes the selected default state. |
| X | PD | X | Undetermined | When V _{CCO} is unpowered, a channel output is undetermined ⁽³⁾ . When V _{CCO} transitions from unpowered to powered-up, a channel output assumes the logic state of the input |

- (1) V_{CCI} = Input-side V_{CC}; V_{CCO} = Output-side V_{CC}; PU = Powered up (V_{CC} ≥ 2.25 V); PD = Powered down (V_{CC} ≤ 1.7 V); X = Irrelevant; H = High level; L = Low level
 (2) A strongly driven input signal can weakly power the floating V_{CC} via an internal protection diode and cause undetermined output.
 (3) The outputs are in undetermined state when 1.7 V < V_{CCI}, V_{CCO} < 2.25 V.

8.4.1 Device I/O Schematics

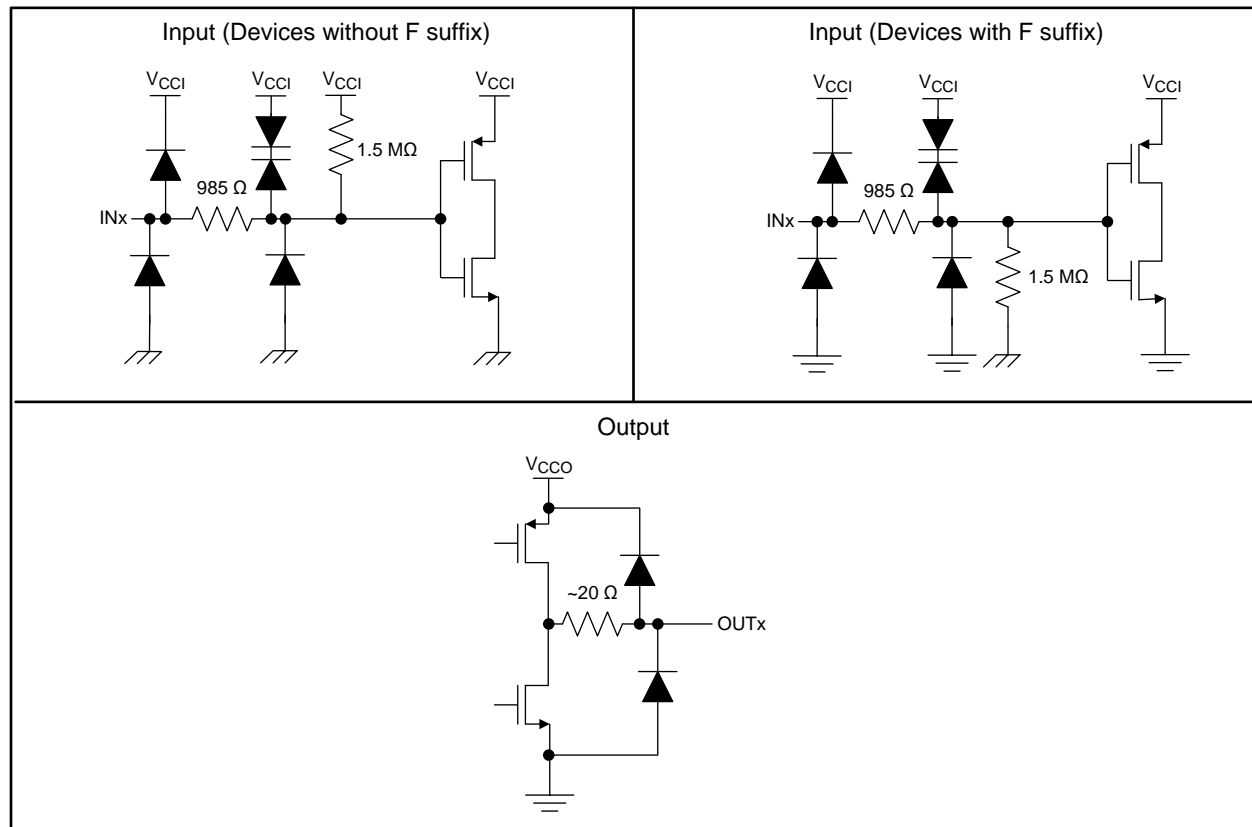

Copyright © 2016, Texas Instruments Incorporated

Figure 23. Device I/O Schematics

9 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.


9.1 Application Information

The ISO776x family of devices is a high-performance, six-channel digital isolators. The ISO776x family of devices uses single-ended CMOS-logic switching technology. The voltage range is from 2.25 V to 5.5 V for both supplies, V_{CC1} and V_{CC2} . When designing with digital isolators, keep in mind that because of the single-ended design structure, digital isolators do not conform to any specific interface standard and are only intended for isolating single-ended CMOS or TTL digital signal lines. The isolator is typically placed between the data controller (that is, μ C or UART), and a data converter or a line transceiver, regardless of the interface type or standard.

9.2 Typical Application

[Figure 24](#) shows the isolated serial-peripheral interface (SPI) and controller-area network (CAN) interface implementation.

Typical Application (continued)

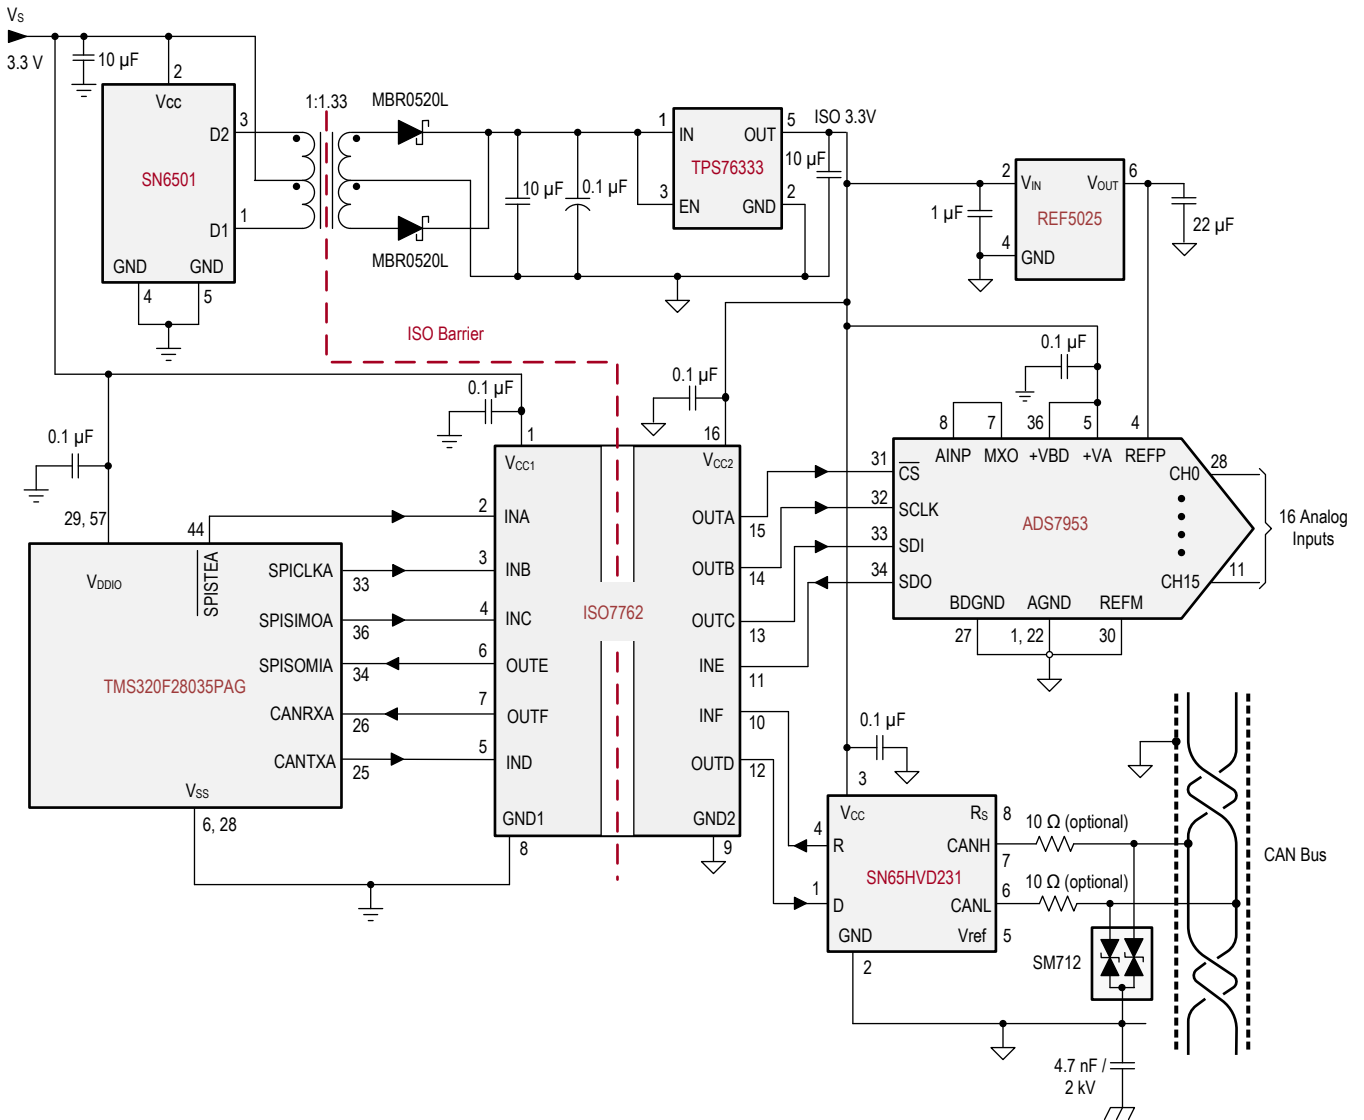

NOTE: Multiple pins and discrete components omitted for clarity purpose.

Figure 24. Isolated SPI and CAN Interface

9.2.1 Design Requirements

For this design example, use the parameters listed in Table 3.

Table 3. Design Parameters

| PARAMETER | VALUE |
|---|---------------|
| Supply voltage, V_{CC1} and V_{CC2} | 2.25 to 5.5 V |
| Decoupling capacitor between V_{CC1} and GND1 | 0.1 μ F |
| Decoupling capacitor from V_{CC2} and GND2 | 0.1 μ F |

9.2.2 Detailed Design Procedure

Unlike optocouplers, which require external components to improve performance, provide bias, or limit current, the ISO776x family of devices only requires two external bypass capacitors to operate.

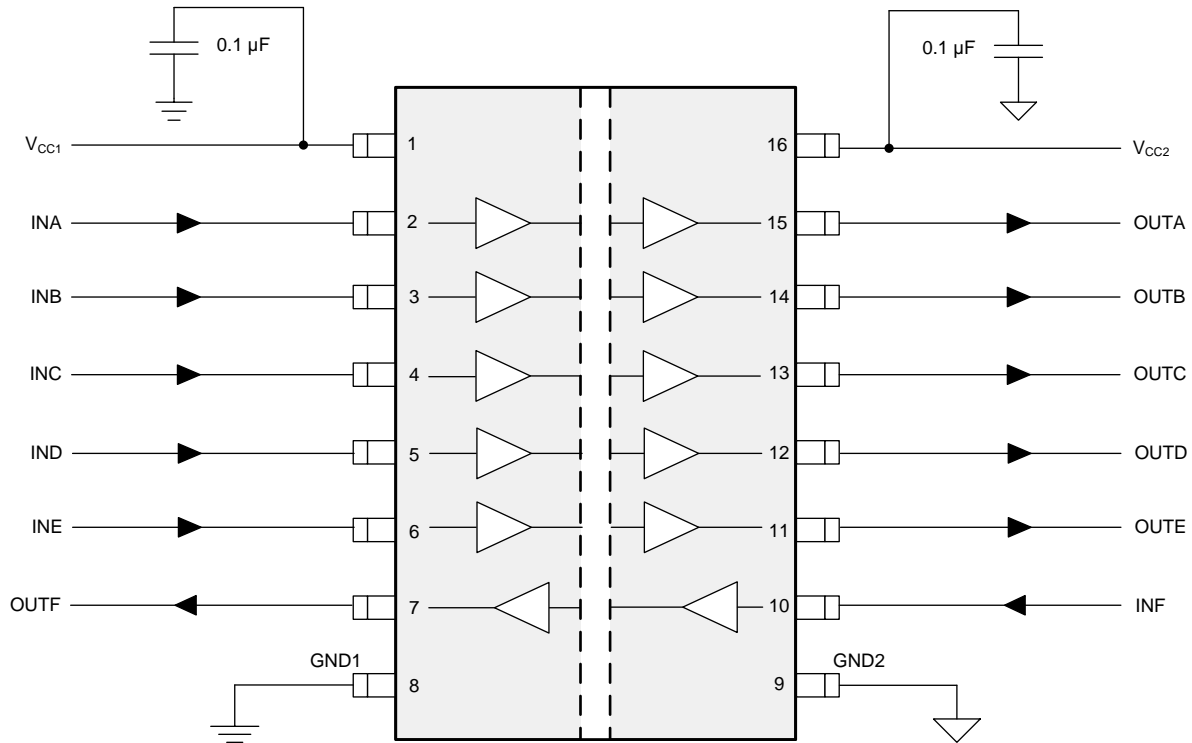


Figure 25. Typical ISO7761 Circuit Hook-up

9.2.3 Application Curves

The typical eye diagram of the ISO776x family of devices indicates low jitter and a wide open eye at the maximum data rate of 100 Mbps.

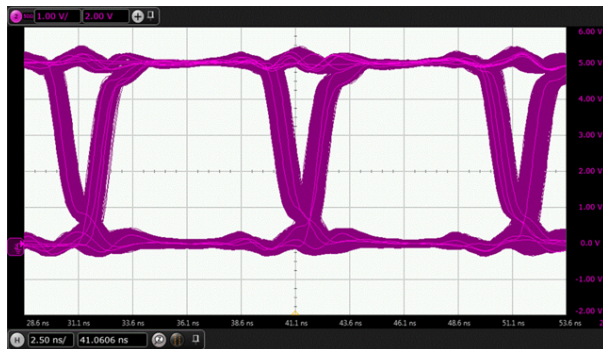


Figure 26. Eye Diagram at 100 Mbps PRBS $2^{16} - 1$ Data, 5 V and 25°C

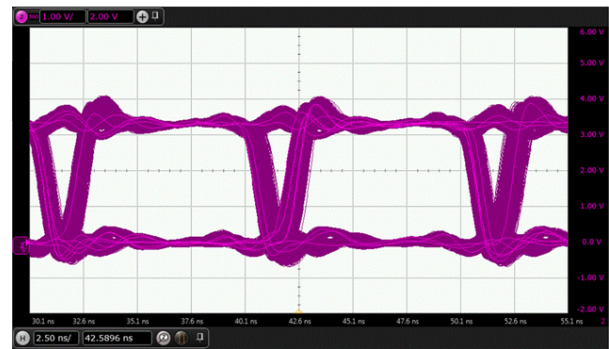


Figure 27. Eye Diagram at 100 Mbps PRBS $2^{16} - 1$ Data, 3.3 V and 25°C

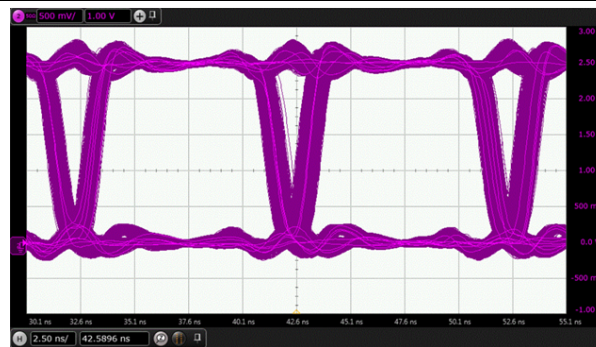


Figure 28. Eye Diagram at 100 Mbps PRBS $2^{16} - 1$ Data, 2.5 V and 25°C

10 Power Supply Recommendations

To help ensure reliable operation at data rates and supply voltages, a 0.1- μ F bypass capacitor is recommended at input and output supply pins (V_{CC1} and V_{CC2}). The capacitors should be placed as close to the supply pins as possible. If only a single primary-side power supply is available in an application, isolated power can be generated for the secondary-side with the help of a transformer driver such as Texas Instruments' [SN6501](#) or [SN6505](#). For such applications, detailed power supply design and transformer selection recommendations are available in the [SN6501 Transformer Driver for Isolated Power Supplies data sheet](#) or the [SN6505 Low-Noise 1-A Transformer Drivers for Isolated Power Supplies data sheet](#).

11 Layout

11.1 Layout Guidelines

A minimum of four layers is required to accomplish a low EMI PCB design (see [Figure 29](#)). Layer stacking should be in the following order (top-to-bottom): high-speed signal layer, ground plane, power plane and low-frequency signal layer.

- Routing the high-speed traces on the top layer avoids the use of vias (and the introduction of their inductances) and allows for clean interconnects between the isolator and the transmitter and receiver circuits of the data link.
- Placing a solid ground plane next to the high-speed signal layer establishes controlled impedance for transmission line interconnects and provides an excellent low-inductance path for the return current flow.
- Placing the power plane next to the ground plane creates additional high-frequency bypass capacitance of approximately 100 pF/inch².
- Routing the slower speed control signals on the bottom layer allows for greater flexibility as these signal links usually have margin to tolerate discontinuities such as vias.

If an additional supply voltage plane or signal layer is needed, add a second power or ground plane system to the stack to keep it symmetrical. This makes the stack mechanically stable and prevents it from warping. Also the power and ground plane of each power system can be placed closer together, thus increasing the high-frequency bypass capacitance significantly.

For detailed layout recommendations, see the [Digital Isolator Design Guide application report](#).

11.1.1 PCB Material

For digital circuit boards operating at less than 150 Mbps, (or rise and fall times greater than 1 ns), and trace lengths of up to 10 inches, use standard FR-4 UL94V-0 printed circuit board. This PCB is preferred over cheaper alternatives because of lower dielectric losses at high frequencies, less moisture absorption, greater strength and stiffness, and the self-extinguishing flammability-characteristics.

11.2 Layout Example

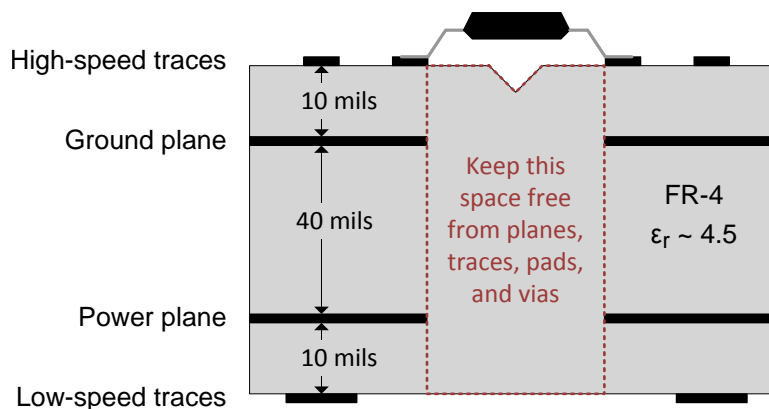


Figure 29. Layout Example Schematic

12 Device and Documentation Support

12.1 Documentation Support

12.1.1 Related Documentation

For related documentation see the following:

- Texas Instruments, [ADS79xx 12/10/8-Bit, 1 MSPS, 16/12/8/4-Channel, Single-Ended, MicroPower, Serial Interface ADCs data sheet](#)
- Texas Instruments, [Digital Isolator Design Guide application report](#)
- Texas Instruments, [Isolation Glossary](#)
- Texas Instruments, [REF50xx Low-Noise, Very Low Drift, Precision Voltage Reference data sheet](#)
- Texas Instruments, [SN6501 Transformer Driver for Isolated Power Supplies data sheet](#)
- Texas Instruments, [SN65HVD23x 3.3-V CAN Bus Transceivers data sheet](#)
- Texas Instruments, [TMS320F28035PAG Piccolo™ Microcontrollers data sheet](#)
- Texas Instruments, [TPS76333 Low-Power 150-mA Low-Dropout Linear Regulators data sheet](#)

12.2 Related Links

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

Table 4. Related Links

| PARTS | PRODUCT FOLDER | SAMPLE & BUY | TECHNICAL DOCUMENTS | TOOLS & SOFTWARE | SUPPORT & COMMUNITY |
|---------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| ISO7760 | Click here | Click here | Click here | Click here | Click here |
| ISO7761 | Click here | Click here | Click here | Click here | Click here |
| ISO7762 | Click here | Click here | Click here | Click here | Click here |
| ISO7763 | Click here | Click here | Click here | Click here | Click here |

12.3 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

12.4 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™ Online Community *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

12.5 Trademarks

Piccolo, E2E are trademarks of Texas Instruments.
All other trademarks are the property of their respective owners.

12.6 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

12.7 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.




DW0016B

PACKAGE OUTLINE

SOIC - 2.65 mm max height

SOIC

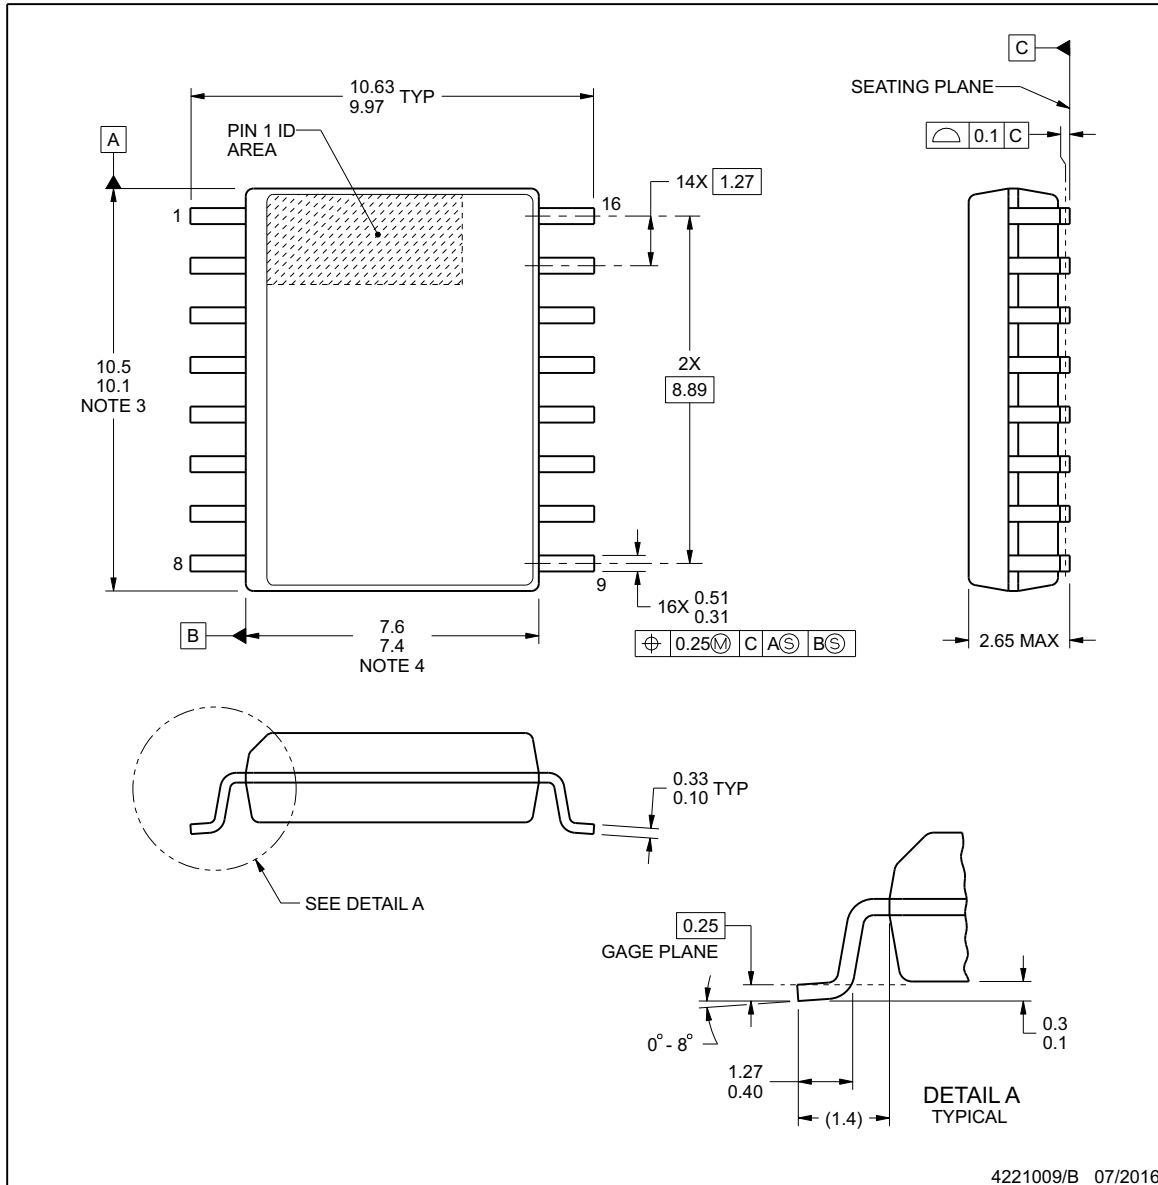

4221009/B 07/2016

NOTES:


1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm, per side.
5. Reference JEDEC registration MS-013.

EXAMPLE BOARD LAYOUT

DW0016B

SOIC - 2.65 mm max height

SOIC

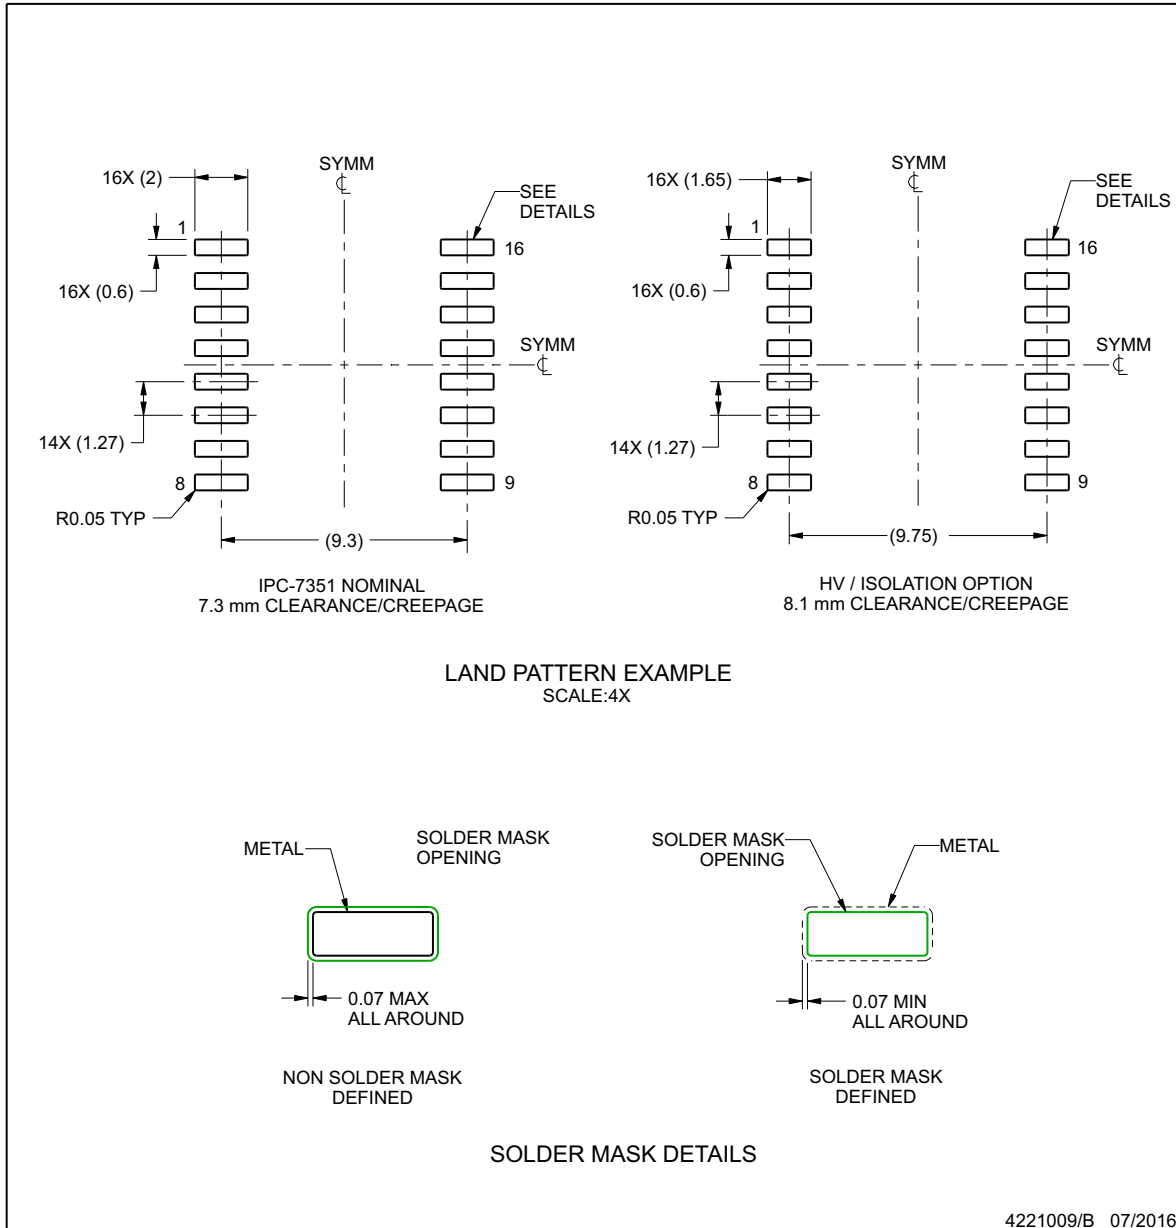

NOTES: (continued)


- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

DW0016B

SOIC - 2.65 mm max height

SOIC

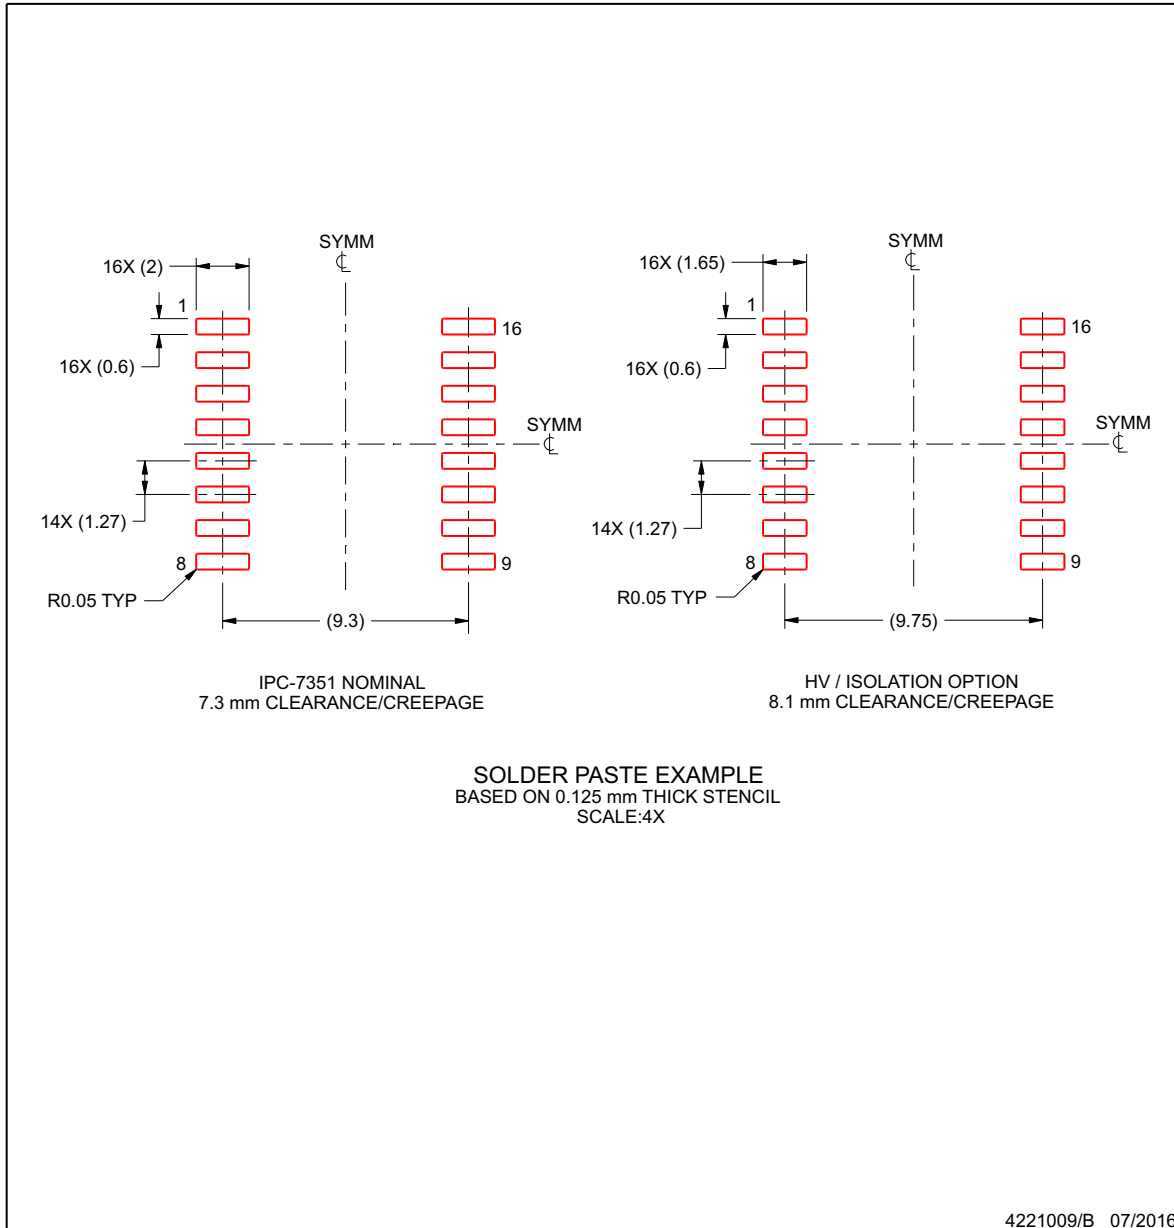

NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.

PACKAGING INFORMATION

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead/Ball Finish (6) | MSL Peak Temp (3) | Op Temp (°C) | Device Marking (4/5) | Samples |
|------------------|---------------|--------------|-----------------|------|-------------|-------------------------|-------------------------|----------------------|--------------|-------------------------|-------------------------|
| ISO7760DBQ | PREVIEW | SSOP | DBQ | 16 | 75 | TBD | Call TI | Call TI | -55 to 125 | | |
| ISO7760DBQR | PREVIEW | SSOP | DBQ | 16 | 2500 | TBD | Call TI | Call TI | -55 to 125 | | |
| ISO7760DW | ACTIVE | SOIC | DW | 16 | 40 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | ISO7760 | Samples |
| ISO7760DWR | ACTIVE | SOIC | DW | 16 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | ISO7760 | Samples |
| ISO7760FDBQ | PREVIEW | SSOP | DBQ | 16 | 75 | TBD | Call TI | Call TI | -55 to 125 | | |
| ISO7760FDBQR | PREVIEW | SSOP | DBQ | 16 | 2500 | TBD | Call TI | Call TI | -55 to 125 | | |
| ISO7760FDW | ACTIVE | SOIC | DW | 16 | 40 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | ISO7760F | Samples |
| ISO7760FDWR | ACTIVE | SOIC | DW | 16 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | ISO7760F | Samples |
| ISO7761DBQ | PREVIEW | SSOP | DBQ | 16 | 75 | TBD | Call TI | Call TI | -55 to 125 | | |
| ISO7761DBQR | PREVIEW | SSOP | DBQ | 16 | 2500 | TBD | Call TI | Call TI | -55 to 125 | | |
| ISO7761DW | ACTIVE | SOIC | DW | 16 | 40 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | ISO7761 | Samples |
| ISO7761DWR | ACTIVE | SOIC | DW | 16 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | ISO7761 | Samples |
| ISO7761FDBQ | PREVIEW | SSOP | DBQ | 16 | 75 | TBD | Call TI | Call TI | -55 to 125 | | |
| ISO7761FDBQR | PREVIEW | SSOP | DBQ | 16 | 2500 | TBD | Call TI | Call TI | -55 to 125 | | |
| ISO7761FDW | ACTIVE | SOIC | DW | 16 | 40 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | ISO7761F | Samples |
| ISO7761FDWR | ACTIVE | SOIC | DW | 16 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | ISO7761F | Samples |
| ISO7762DBQ | PREVIEW | SSOP | DBQ | 16 | 75 | TBD | Call TI | Call TI | -55 to 125 | | |
| ISO7762DBQR | PREVIEW | SSOP | DBQ | 16 | 2500 | TBD | Call TI | Call TI | -55 to 125 | | |
| ISO7762DW | ACTIVE | SOIC | DW | 16 | 40 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | ISO7762 | Samples |
| ISO7762DWR | ACTIVE | SOIC | DW | 16 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | ISO7762 | Samples |
| ISO7762FDBQ | PREVIEW | SSOP | DBQ | 16 | 75 | TBD | Call TI | Call TI | -55 to 125 | | |
| ISO7762FDBQR | PREVIEW | SSOP | DBQ | 16 | 2500 | TBD | Call TI | Call TI | -55 to 125 | | |

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead/Ball Finish (6) | MSL Peak Temp (3) | Op Temp (°C) | Device Marking (4/5) | Samples |
|------------------|---------------|--------------|-----------------|------|-------------|-------------------------|-------------------------|----------------------|--------------|-------------------------|-------------------------|
| ISO7762FDW | ACTIVE | SOIC | DW | 16 | 40 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | ISO7762F | Samples |
| ISO7762FDWR | ACTIVE | SOIC | DW | 16 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | ISO7762F | Samples |
| ISO7763DBQ | PREVIEW | SSOP | DBQ | 16 | 75 | TBD | Call TI | Call TI | -55 to 125 | | |
| ISO7763DBQR | PREVIEW | SSOP | DBQ | 16 | 2500 | TBD | Call TI | Call TI | -55 to 125 | | |
| ISO7763DW | ACTIVE | SOIC | DW | 16 | 40 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | ISO7763 | Samples |
| ISO7763DWR | ACTIVE | SOIC | DW | 16 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | ISO7763 | Samples |
| ISO7763FDBQ | PREVIEW | SSOP | DBQ | 16 | 75 | TBD | Call TI | Call TI | -55 to 125 | | |
| ISO7763FDBQR | PREVIEW | SSOP | DBQ | 16 | 2500 | TBD | Call TI | Call TI | -55 to 125 | | |
| ISO7763FDW | ACTIVE | SOIC | DW | 16 | 40 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | ISO7763F | Samples |
| ISO7763FDWR | ACTIVE | SOIC | DW | 16 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | ISO7763F | Samples |

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSELETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

⁽⁶⁾ Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| ISO7760DWR | SOIC | DW | 16 | 2000 | 330.0 | 16.4 | 10.75 | 10.7 | 2.7 | 12.0 | 16.0 | Q1 |
| ISO7760FDWR | SOIC | DW | 16 | 2000 | 330.0 | 16.4 | 10.75 | 10.7 | 2.7 | 12.0 | 16.0 | Q1 |
| ISO7761DWR | SOIC | DW | 16 | 2000 | 330.0 | 16.4 | 10.75 | 10.7 | 2.7 | 12.0 | 16.0 | Q1 |
| ISO7761FDWR | SOIC | DW | 16 | 2000 | 330.0 | 16.4 | 10.75 | 10.7 | 2.7 | 12.0 | 16.0 | Q1 |
| ISO7762DWR | SOIC | DW | 16 | 2000 | 330.0 | 16.4 | 10.75 | 10.7 | 2.7 | 12.0 | 16.0 | Q1 |
| ISO7762FDWR | SOIC | DW | 16 | 2000 | 330.0 | 16.4 | 10.75 | 10.7 | 2.7 | 12.0 | 16.0 | Q1 |
| ISO7763DWR | SOIC | DW | 16 | 2000 | 330.0 | 16.4 | 10.75 | 10.7 | 2.7 | 12.0 | 16.0 | Q1 |
| ISO7763FDWR | SOIC | DW | 16 | 2000 | 330.0 | 16.4 | 10.75 | 10.7 | 2.7 | 12.0 | 16.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|-------------|--------------|-----------------|------|------|-------------|------------|-------------|
| ISO7760DWR | SOIC | DW | 16 | 2000 | 367.0 | 367.0 | 38.0 |
| ISO7760FDWR | SOIC | DW | 16 | 2000 | 367.0 | 367.0 | 38.0 |
| ISO7761DWR | SOIC | DW | 16 | 2000 | 367.0 | 367.0 | 38.0 |
| ISO7761FDWR | SOIC | DW | 16 | 2000 | 367.0 | 367.0 | 38.0 |
| ISO7762DWR | SOIC | DW | 16 | 2000 | 367.0 | 367.0 | 38.0 |
| ISO7762FDWR | SOIC | DW | 16 | 2000 | 367.0 | 367.0 | 38.0 |
| ISO7763DWR | SOIC | DW | 16 | 2000 | 367.0 | 367.0 | 38.0 |
| ISO7763FDWR | SOIC | DW | 16 | 2000 | 367.0 | 367.0 | 38.0 |

IMPORTANT NOTICE

Texas Instruments Incorporated (TI) reserves the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

TI's published terms of sale for semiconductor products (<http://www.ti.com/sc/docs/stdterms.htm>) apply to the sale of packaged integrated circuit products that TI has qualified and released to market. Additional terms may apply to the use or sale of other types of TI products and services.

Reproduction of significant portions of TI information in TI data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such reproduced documentation. Information of third parties may be subject to additional restrictions. Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyers and others who are developing systems that incorporate TI products (collectively, "Designers") understand and agree that Designers remain responsible for using their independent analysis, evaluation and judgment in designing their applications and that Designers have full and exclusive responsibility to assure the safety of Designers' applications and compliance of their applications (and of all TI products used in or for Designers' applications) with all applicable regulations, laws and other applicable requirements. Designer represents that, with respect to their applications, Designer has all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. Designer agrees that prior to using or distributing any applications that include TI products, Designer will thoroughly test such applications and the functionality of such TI products as used in such applications.

TI's provision of technical, application or other design advice, quality characterization, reliability data or other services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using TI Resources in any way, Designer (individually or, if Designer is acting on behalf of a company, Designer's company) agrees to use any particular TI Resource solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

Designer is authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS. TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY DESIGNER AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Unless TI has explicitly designated an individual product as meeting the requirements of a particular industry standard (e.g., ISO/TS 16949 and ISO 26262), TI is not responsible for any failure to meet such industry standard requirements.

Where TI specifically promotes products as facilitating functional safety or as compliant with industry functional safety standards, such products are intended to help enable customers to design and create their own applications that meet applicable functional safety standards and requirements. Using products in an application does not by itself establish any safety features in the application. Designers must ensure compliance with safety-related requirements and standards applicable to their applications. Designer may not use any TI products in life-critical medical equipment unless authorized officers of the parties have executed a special contract specifically governing such use. Life-critical medical equipment is medical equipment where failure of such equipment would cause serious bodily injury or death (e.g., life support, pacemakers, defibrillators, heart pumps, neurostimulators, and implantables). Such equipment includes, without limitation, all medical devices identified by the U.S. Food and Drug Administration as Class III devices and equivalent classifications outside the U.S.

TI may expressly designate certain products as completing a particular qualification (e.g., Q100, Military Grade, or Enhanced Product). Designers agree that it has the necessary expertise to select the product with the appropriate qualification designation for their applications and that proper product selection is at Designers' own risk. Designers are solely responsible for compliance with all legal and regulatory requirements in connection with such selection.

Designer will fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of Designer's non-compliance with the terms and provisions of this Notice.