

# High Isolation Gate Drive Transformers

PH9572.XXXNL and PH9572.XXXANL - SMT



- Functional and Basic<sup>5</sup> insulation
- 5mm creepage between gate windings (ANL)
- Up to 2500Vrms gate to drive isolation
- Up to 1000Vdc constant isolation between windings
- Up to 6W of Driver Power

## Electrical Specifications @ 25°C - Operating Temperature -40°C to +125°C

Part Number	Turns Ratio (8-1):(3-4):(6-5)	ET (1-8) (V * μsec MAX)	Core Loss Factor K1	Primary Inductance (1-8) (mH MIN)	Leakage Inductance (1-8) short (3,4,5,6) (μH MAX)	Parasitic Capacitance (1,8) to (3,4) =(1,8)to(5,6) (pF MAX)	Parasitic Capacitance (3,4)to(5,6) (pF MAX)	DCR Drive (Ohms Max)			Hi-Pot (Vrms)	
								DCR Drive (1-8)	DCR Gates (5-6)	DCR Gates (3-4)	Drive-Gates (1,8) TO (3,4,5,6)	Gate-Gate (3,4) TO (5,6)
<b>PH9572.XXXNL - Functional Insulation 500Vdc continuous isolation</b>												
PH9572.111NL	1:1:1	84.7	2.6	4.0	1.8	23	12.5	0.7	0.6	0.8	1500	1500
PH9572.122NL	1:2:2	42.4	5.2	1.0	0.6	20	12.5	0.35	0.6	0.8	1500	1500
PH9572.233NL	2:3:3	56.5	3.9	1.8	0.9	20	12.5	0.45	0.6	0.8	1500	1500
PH9572.322NL	3:2:2	84.7	2.6	4.0	1.8	20	10.5	0.65	0.3	0.38	1500	1500
PH9572.211NL	2:1:1	84.7	2.6	4.0	1.6	18	10.5	0.7	0.4	0.55	1500	1500
<b>PH9572.XXXANL - Basic Insulation 1000Vdc continuous isolation</b>												
PH9572.111ANL	1:1:1	84.7	2.6	4.0	1.8	12	8	1.6	1.5	2.0	2500	2500
PH9572.122ANL	1:2:2	42.4	5.2	1.0	0.6	11	7	0.8	1.5	1.9	2500	2500
PH9572.233ANL	2:3:3	56.5	3.9	1.8	0.9	11	7	1.1	1.5	2.0	2500	2500
PH9572.322ANL	3:2:2	84.7	2.6	4.0	1.8	11	7	1.6	1.0	1.3	2500	2500
PH9572.211ANL	2:1:1	84.7	2.6	4.0	1.6	11	7	1.6	0.8	1.0	2500	2500

- Notes:**
- The max ET is calculated to limit the core loss and temperature rise at 100kHz based on a bipolar flux swing of 2200 gauss Peak. This value needs to be derated for higher frequencies using the temperature rise calculation.
  - The temperature rise of the component is calculated based on the total core loss and copper loss:
    - To calculate total copper loss (W), use the following formula:  
Copper Loss (W) =  $I_{rms}^2 * (DCR\_Drive + (\# \text{ of Gates}) * DCR\_Gates)$
    - To calculate total core loss (mW), use the following formula:  
Core Loss (mW) =  $7.239E-8 * (\text{Frequency in kHz})^{1.681} * (K1 * ET)^{2.545}$   
Where ET =  $(V * \text{Duty Cycle}) / \text{Frequency}$
    - To calculate temperature rise, use the following formula:  
Temperature Rise (°C) =  $120 * (\text{Core Loss(W)} + \text{Copper Loss (W)})$
  - Continuous isolation voltage confirmed by partial discharge measurement.  
PH9572.XXXNL: 500V  
PH9572.XXXANL: 1000V.
  - ANL versions, which use PFA insulated wire on both the drive and gate windings, are compliant with IEC 62368-1, IEC 61558-1, IEC 61010-1 & IEC 60601-1 for basic insulation.
  - 5mm creepage distance between ANL gate windings satisfies IEC62368-1 & IEC61558-1/-2-16 requirement for basic insulation with working voltage up to 500Vrms, OVC II, Pollution Degree 2 and altitude up to 2000 m. There is 2.5mm creepage between gate and drive windings.
  - Unless otherwise specified, all testing is made at 100kHz, 0.1V<sub>ac</sub>.
  - Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PH9572.111NL becomes PH9572.111NLT). Pulse complies to industry standard tape and reel specification EIA481.


# High Isolation Gate Drive Transformers

PH9572.XXXNL and PH9572.XXXANL - SMT

## Mechanics

## Schematics

PH9572.XXXNL and PH9572.XXXANL

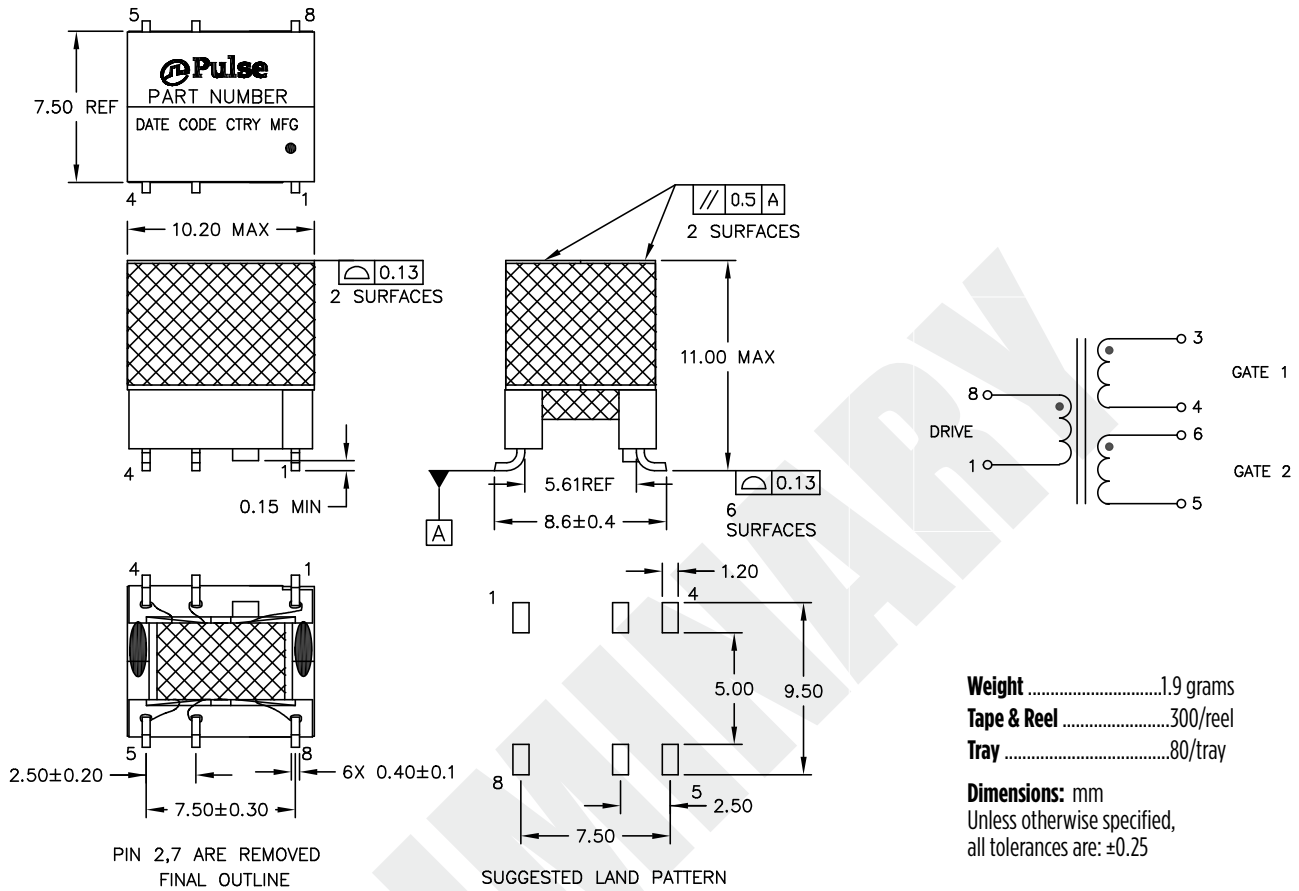

### For More Information:

Americas - [prodinfo\\_power@pulseelectronics.com](mailto:prodinfo_power@pulseelectronics.com) | Europe - [power-apps-europe@pulseelectronics.com](mailto:power-apps-europe@pulseelectronics.com) | Asia - [power-apps-asia@pulseelectronics.com](mailto:power-apps-asia@pulseelectronics.com)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2020. Pulse Electronics, Inc. All rights reserved.