


## 14-stage ripple carry binary counter/divider and oscillator

Datasheet - production data

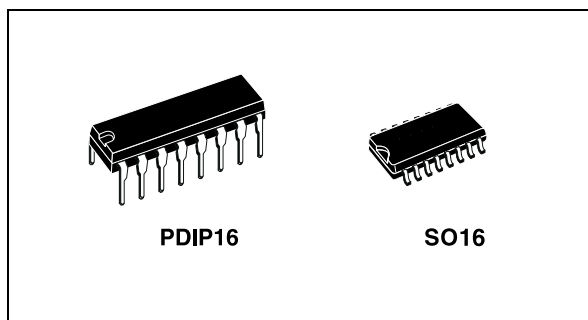

### Features

- Medium speed operation
- Common reset
- Fully static operation
- Buffered inputs and outputs
- Quiescent current specified up to 20 V
- 5 V, 10 V and 15 V parametric ratings
- Input leakage current:  $I_l = 100 \text{ nA}$  (max.) at  $V_{DD} = 18 \text{ V}$ ,  $T_A = 25 \text{ }^\circ\text{C}$
- 100% tested for quiescent current
- ESD performance
  - HBM: 1 kV
  - MM: 200 V
  - CDM: 1 kV

### Applications

- Automotive
- Industrial
- Computer
- Consumer

### Description

The HCF4060 device is a monolithic integrated circuit fabricated in MOS (metal oxide semiconductor) technology available in SO16 and PDIP16 packages.

The HCF4060 device consists of an oscillator section and 14 ripple carry binary counter stages.

The oscillator configuration allows design of either RC or crystal oscillator circuits. A RESET input is provided which resets the counter to the all 0's state and disables the oscillator. A high level on the RESET line accomplishes the reset function. All counter stages are master slave flip-flops. The state of the counter is advanced one step in binary order on the negative transition of  $\phi_1$  (and  $\phi_0$ ). All inputs and outputs are fully buffered. Schmitt trigger action on the clock pin permits unlimited clock rise and fall time.

Table 1. Device summary

| Order code                    | Temperature range | Package                   | Packaging     | Marking   |
|-------------------------------|-------------------|---------------------------|---------------|-----------|
| HCF4060M013TR                 | -55/+125 °C       | SO16                      | Tape and reel | HCF4060   |
| HCF4060YM013TR <sup>(1)</sup> | -40/+125 °C       | SO16 (automotive version) | Tape and reel | HCF4060Y  |
| HCF4060BEY                    | -55/+125 °C       | PDIP16                    | Tube          | HCF4066BE |

1. Qualification and characterization according to AEC Q100 and Q003 or equivalent, advanced screening according to AEC Q001 and Q002 or equivalent.

# Contents

|          |   |           |
|----------|---|-----------|
| <b>1</b> | <b>Pin information</b> .....                | <b>3</b>  |
| <b>2</b> | <b>Functional description</b> .....         | <b>4</b>  |
| <b>3</b> | <b>Electrical characteristics</b> .....     | <b>6</b>  |
| <b>4</b> | <b>Package information</b> .....            | <b>11</b> |
|          | 4.1 PDIP16 (0.25) package information ..... | 12        |
|          | 4.2 SO16 package information .....          | 13        |
| <b>5</b> | <b>Ordering information</b> .....           | <b>14</b> |
| <b>6</b> | <b>Revision history</b> .....               | <b>14</b> |

# 1 Pin information

Figure 1. Pin connection

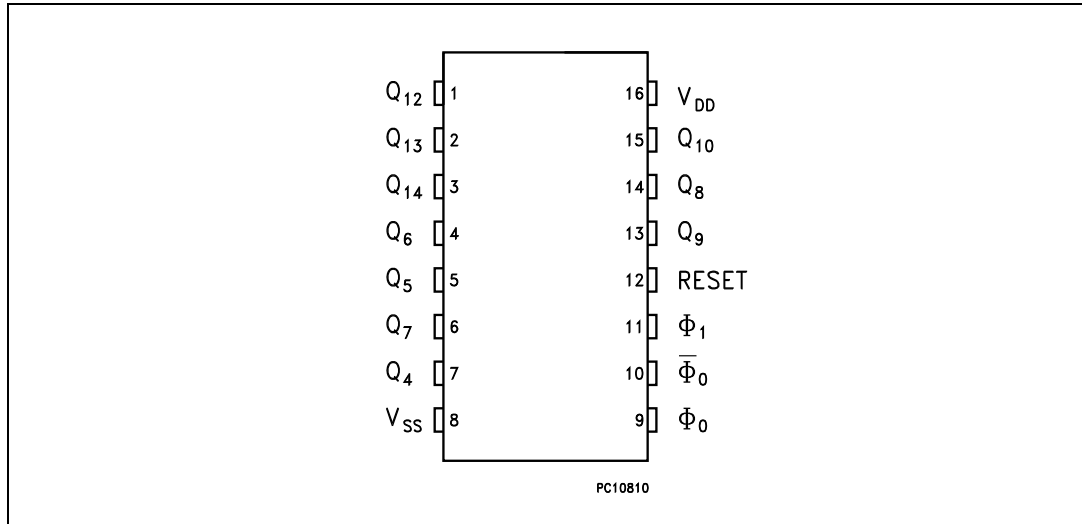


Table 2. Pin description

| Pin no.                         | Symbol   | Name and function       |
|---------------------------------|--|-------------------------|
| 1, 2, 3, 4, 5, 6, 7, 13, 14, 15 | $Q_{12}, Q_{13}, Q_{14}, Q_6, Q_5, Q_7, Q_4, Q_9, Q_8, Q_{10}$ | Outputs                 |
| 9, 10, 11                       | $\Phi_0, \bar{\Phi}_0, \Phi_1$                                 | Oscillator input        |
| 12                              | RESET  | Reset                   |
| 8                               | $V_{SS}$   | Negative supply voltage |
| 16                              | $V_{DD}$   | Positive supply voltage |

## 2 Functional description

Figure 2. Logic diagram

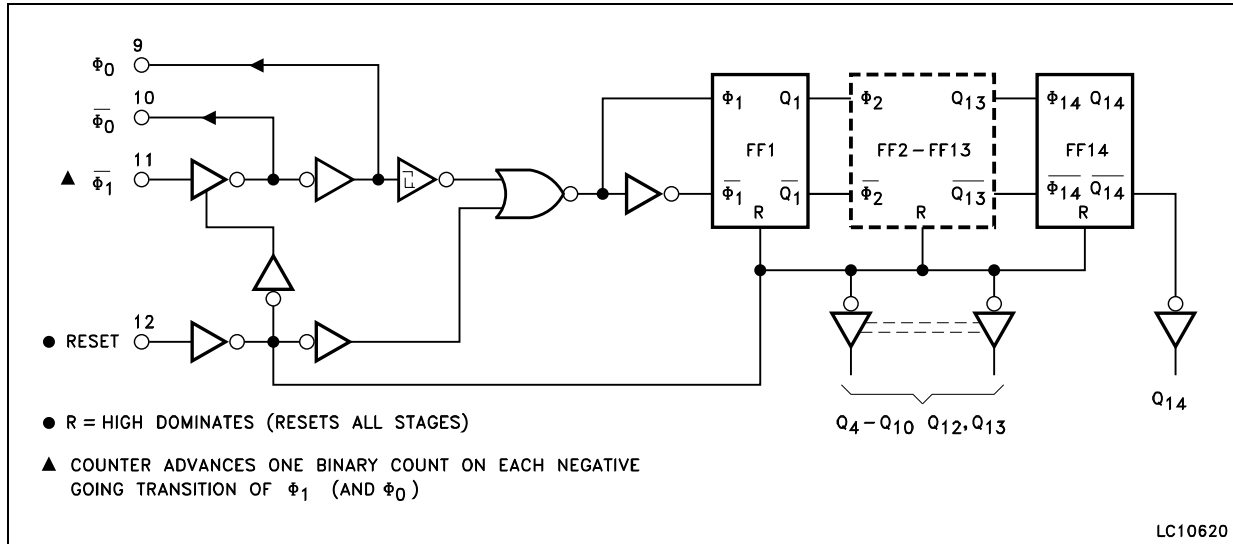


Figure 3. Functional diagram


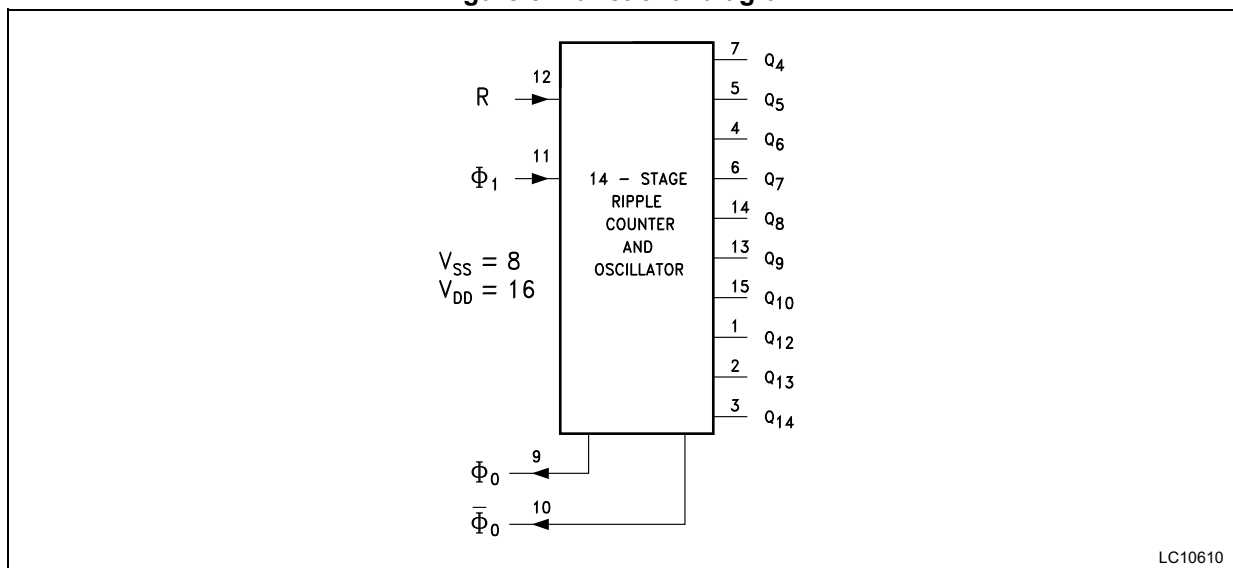


Figure 4. Input equivalent circuit

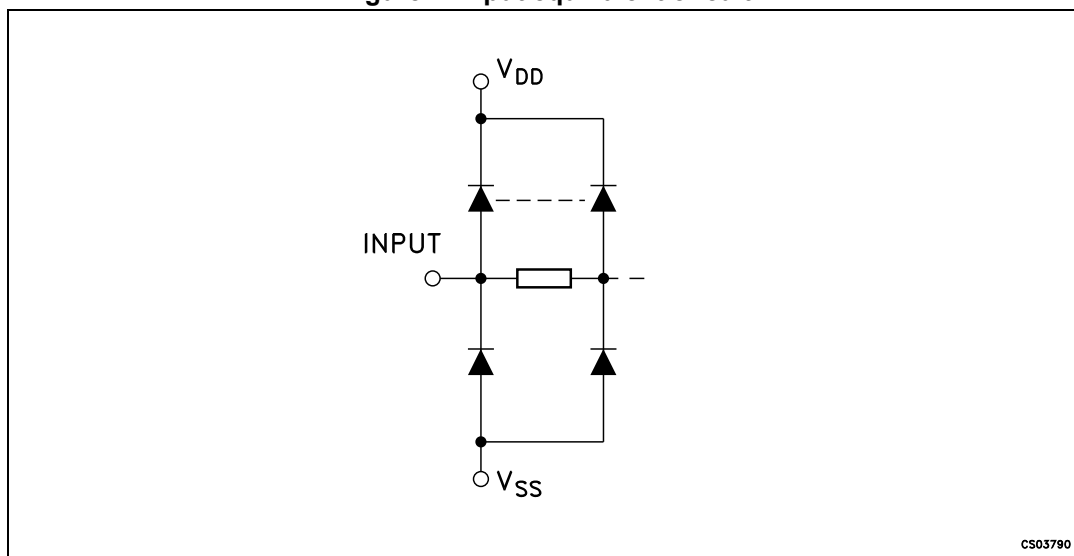

### 3 Electrical characteristics

Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied. All voltage values are referred to  $V_{SS}$  pin voltage.

**Table 3. Absolute maximum ratings**

| Symbol    | Parameter                               | Value                  | Unit |
|-----------|---|------------------------|------|
| $V_{DD}$  | Supply voltage                          | -0.5 to +22            | V    |
| $V_I$     | DC input voltage                        | -0.5 to $V_{DD} + 0.5$ |      |
| $I_I$     | DC input current                        | $\pm 10$               | mA   |
| $P_D$     | Power dissipation per package           | 200                    | mW   |
|           | Power dissipation per output transistor | 100                    |      |
| $T_{op}$  | Operating temperature                   | -55 to +125            | °C   |
| $T_{stg}$ | Storage temperature                     | -65 to +150            |      |

**Table 4. Recommended operating conditions**

| Symbol   | Parameter             | Value         | Unit |
|----------|-----------------------|---------------|------|
| $V_{DD}$ | Supply voltage        | 3 to 20       | V    |
| $V_I$    | Input voltage         | 0 to $V_{DD}$ |      |
| $T_{op}$ | Operating temperature | -55 to 125    | °C   |

Table 5. DC specifications<sup>(1)</sup>

| Symbol          | Parameter                 | Test condition        |                       |                                |                        | Value                  |               |           |              |           |               | Unit    |         |
|-----------------|---------------------------|-----------------------|-----------------------|--------------------------------|------------------------|------------------------|---------------|-----------|--------------|-----------|---------------|---------|---------|
|                 |                           | V <sub>I</sub><br>(V) | V <sub>O</sub><br>(V) | I <sub>O</sub>  <br>( $\mu$ A) | V <sub>DD</sub><br>(V) | T <sub>A</sub> = 25 °C |               |           | -40 to 85 °C |           | -55 to 125 °C |         |         |
|                 |                           |                       |                       |                                |                        | Min.                   | Typ.          | Max.      | Min.         | Max.      | Min.          |         | Max.    |
| I <sub>L</sub>  | Quiescent current         | 0/5                   |                       |                                | 5                      |                        | 0.04          | 5         |              | 5         |               | 150     | $\mu$ A |
|                 |                           | 0/10                  |                       |                                | 10                     |                        | 0.04          | 10        |              | 10        |               | 300     |         |
|                 |                           | 0/15                  |                       |                                | 15                     |                        | 0.04          | 20        |              | 20        |               | 600     |         |
|                 |                           | 0/20                  |                       |                                | 20                     |                        | 0.08          | 100       |              | 100       |               | 3000    |         |
| V <sub>OH</sub> | High level output voltage | 0/5                   |                       | <1                             | 5                      | 4.95                   |               |           | 4.95         |           | 4.95          |         | V       |
|                 |                           | 0/10                  |                       | <1                             | 10                     | 9.95                   |               |           | 9.95         |           | 9.95          |         |         |
|                 |                           | 0/15                  |                       | <1                             | 15                     | 14.95                  |               |           | 14.95        |           | 14.95         |         |         |
| V <sub>OL</sub> | Low level output voltage  | 5/0                   |                       | <1                             | 5                      |                        | 0.05          |           |              | 0.05      |               | 0.05    | V       |
|                 |                           | 10/0                  |                       | <1                             | 10                     |                        | 0.05          |           |              | 0.05      |               | 0.05    |         |
|                 |                           | 15/0                  |                       | <1                             | 15                     |                        | 0.05          |           |              | 0.05      |               | 0.05    |         |
| V <sub>IH</sub> | High level input voltage  |                       | 0.5/4.5               | <1                             | 5                      | 3.5                    |               |           | 3.5          |           | 3.5           |         | V       |
|                 |                           |                       | 1/9                   | <1                             | 10                     | 7                      |               |           | 7            |           | 7             |         |         |
|                 |                           |                       | 1.5/13.5              | <1                             | 15                     | 11                     |               |           | 11           |           | 11            |         |         |
| V <sub>IL</sub> | Low level input voltage   |                       | 4.5/0.5               | <1                             | 5                      |                        |               | 1.5       |              | 1.5       |               | 1.5     | V       |
|                 |                           |                       | 9/1                   | <1                             | 10                     |                        |               | 3         |              | 3         |               | 3       |         |
|                 |                           |                       | 13.5/1.5              | <1                             | 15                     |                        |               | 4         |              | 4         |               | 4       |         |
| I <sub>OH</sub> | Output drive current      | 0/5                   | 2.5                   | <1                             | 5                      | -1.36                  | -3.2          |           | -1.15        |           | -1.1          |         | mA      |
|                 |                           | 0/5                   | 4.6                   | <1                             | 5                      | -0.44                  | -1            |           | -0.36        |           | -0.36         |         |         |
|                 |                           | 0/10                  | 9.5                   | <1                             | 10                     | -1.1                   | -2.6          |           | -0.9         |           | -0.9          |         |         |
|                 |                           | 0/15                  | 13.5                  | <1                             | 15                     | -3.0                   | -6.8          |           | -2.4         |           | -2.4          |         |         |
| I <sub>OL</sub> | Output sink current       | 0/5                   | 0.4                   | <1                             | 5                      | 0.44                   | 1             |           | 0.36         |           | 0.36          |         | mA      |
|                 |                           | 0/10                  | 0.5                   | <1                             | 10                     | 1.1                    | 2.6           |           | 0.9          |           | 0.9           |         |         |
|                 |                           | 0/15                  | 1.5                   | <1                             | 15                     | 3.0                    | 6.8           |           | 2.4          |           | 2.4           |         |         |
| I <sub>I</sub>  | Input leakage current     | 0/18                  | Any input             |                                | 18                     |                        | $\pm 10^{-5}$ | $\pm 0.3$ |              | $\pm 0.3$ |               | $\pm 1$ | $\mu$ A |
| C <sub>I</sub>  | Input capacitance         |                       | Any input             |                                |                        |                        | 5             | 7.5       |              |           |               |         | pF      |

1. The noise margin for both "1" and "0" level is: 1 V min. with V<sub>DD</sub> = 5 V, 2 V min. with V<sub>DD</sub> = 10 V, 2.5 V min. with V<sub>DD</sub> = 15 V.

**Table 6. Dynamic electrical characteristics**  
 (T<sub>amb</sub> = 25 °C, C<sub>L</sub> = 50 pF, R<sub>L</sub> = 200 KΩ, t<sub>r</sub> = t<sub>f</sub> = 20 ns)

| Symbol                              | Parameter  | Test condition      |  | Value <sup>(1)</sup> |      |      | Unit |
|-------------------------------------|--|---------------------|--|----------------------|------|------|------|
|                                     |  | V <sub>DD</sub> (V) |  | Min.                 | Typ. | Max. |      |
| t <sub>TLH</sub> , t <sub>THL</sub> | Output transition time                                       | 5                   |  |                      | 100  | 200  | ns   |
|                                     |  | 10                  |  |                      | 50   | 100  |      |
|                                     |  | 15                  |  |                      | 40   | 80   |      |
| t <sub>PLH</sub> , t <sub>PHL</sub> | Propagation delay time (φ to Q <sub>4</sub> out)             | 5                   |  |                      | 370  | 740  |      |
|                                     |  | 10                  |  |                      | 150  | 300  |      |
|                                     |  | 15                  |  |                      | 100  | 200  |      |
| t <sub>PLH</sub> , t <sub>PHL</sub> | Propagation delay time (Q <sub>n</sub> to Q <sub>n+1</sub> ) | 5                   |  |                      | 100  | 200  |      |
|                                     |  | 10                  |  |                      | 50   | 100  |      |
|                                     |  | 15                  |  |                      | 40   | 80   |      |
| t <sub>w</sub>                      | Input pulse width  | 5                   | f = 100 KHz  |                      | 50   | 100  |      |
|                                     |  | 10                  |  |                      | 20   | 40   |      |
|                                     |  | 15                  |  |                      | 15   | 30   |      |
| t <sub>r</sub> , t <sub>f</sub>     | Input pulse rise and fall time                               | 5                   |  | Unlimited            |      |      | μs   |
|                                     |  | 10                  |  |                      |      |      |      |
|                                     |  | 15                  |  |                      |      |      |      |
| f <sub>max</sub>                    | Maximum clock input frequency                                | 5                   |  | 3.5                  | 7    |      | MHz  |
|                                     |  | 10                  |  | 8                    | 16   |      |      |
|                                     |  | 15                  |  | 12                   | 24   |      |      |
| <b>Reset operation</b>              |  |                     |  |                      |      |      |      |
| t <sub>PHL</sub>                    | Propagation delay time                                       | 5                   |  |                      | 180  | 360  | ns   |
|                                     |  | 10                  |  |                      | 80   | 160  |      |
|                                     |  | 15                  |  |                      | 50   | 100  |      |
| t <sub>w</sub>                      | Input pulse width  | 5                   |  |                      | 60   | 120  |      |
|                                     |  | 10                  |  |                      | 30   | 60   |      |
|                                     |  | 15                  |  |                      | 20   | 40   |      |
| <b>RC operation</b>                 |  |                     |  |                      |      |      |      |
|                                     | Variation of frequency (unit-to-unit)                        | 5                   | C <sub>x</sub> = 200 pF, R <sub>s</sub> = 560 KΩ, R <sub>x</sub> = 50 KΩ | 18                   | 21.5 | 25   | KHz  |
|                                     |  | 10                  |  | 20                   | 23   | 26   |      |
|                                     |  | 15                  |  | 21.1                 | 24   | 27   |      |
|                                     | Variation of frequency with voltage change (the same unit)   | 5 to 10             | C <sub>x</sub> = 200 pF, R <sub>s</sub> = 560 KΩ, R <sub>x</sub> = 50 KΩ |                      |      | 2    |      |
|                                     |  | 10 to 15            |  |                      |      | 1    |      |

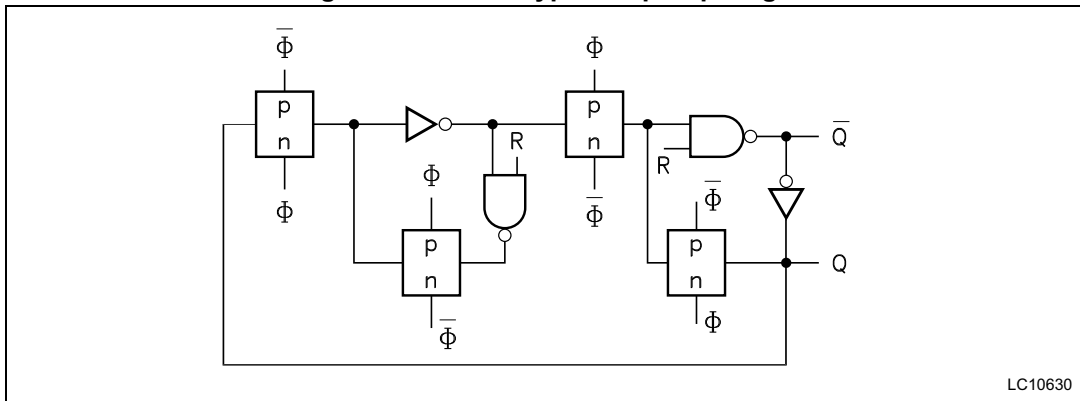


**Table 6. Dynamic electrical characteristics**  
 ( $T_{amb} = 25\text{ °C}$ ,  $C_L = 50\text{ pF}$ ,  $R_L = 200\text{ K}\Omega$ ,  $t_r = t_f = 20\text{ ns}$ ) (continued)

| Symbol | Parameter                                   | Test condition |   | Value <sup>(1)</sup> |      |      | Unit          |
|--------|---|----------------|---|----------------------|------|------|---------------|
|        |   | $V_{DD}$ (V)   |   | Min.                 | Typ. | Max. |               |
| $R_x$  |   | 5              | $C_x = 10\text{ }\mu\text{F}$                   |                      |      | 20   | M $\Omega$    |
|        |   | 10             | $C_x = 50\text{ }\mu\text{F}$                   |                      |      | 20   |               |
|        |   | 15             | $C_x = 10\text{ }\mu\text{F}$                   |                      |      | 10   |               |
| $C_x$  |   | 5              | $R_x = 500\text{ K}\Omega$                      |                      |      | 1000 | $\mu\text{F}$ |
|        |   | 10             | $R_x = 300\text{ K}\Omega$                      |                      |      | 50   |               |
|        |   | 15             | $R_x = 300\text{ K}\Omega$                      |                      |      | 50   |               |
|        | Maximum oscillator frequency <sup>(2)</sup> | 10             | $R_x = 5\text{ K}\Omega$ , $C_x = 15\text{ pF}$ | 530                  | 650  | 810  | pF            |
|        |   | 15             |   | 690                  | 800  | 940  |               |


1. Typical temperature coefficient for all  $V_{DD}$  values is 0.3 %/°C, all input rise and fall times = 20 ns.
2. RC oscillator applications are not recommended at supply voltages below 7 V for  $R_x = 50\text{ K}\Omega$ .

Figure 5. Detail of typical flip-flop stage




LC10630

Figure 6. Typical RC oscillator circuit

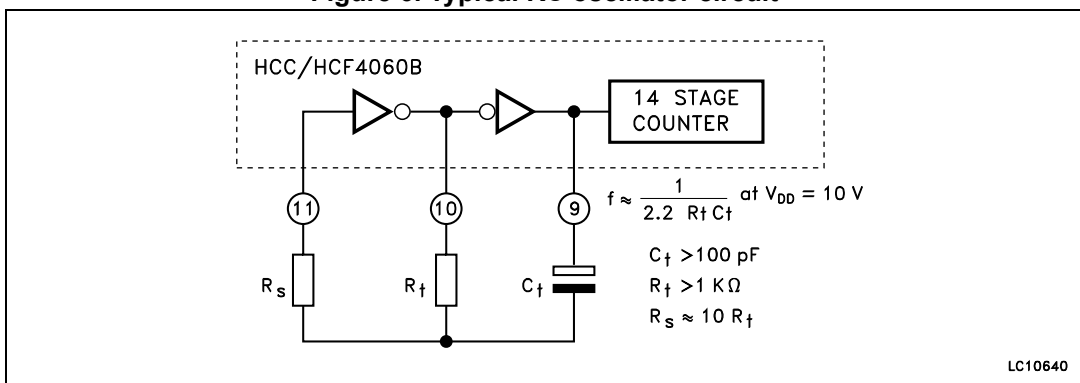

LC10640

Figure 7. Typical crystal oscillator circuit

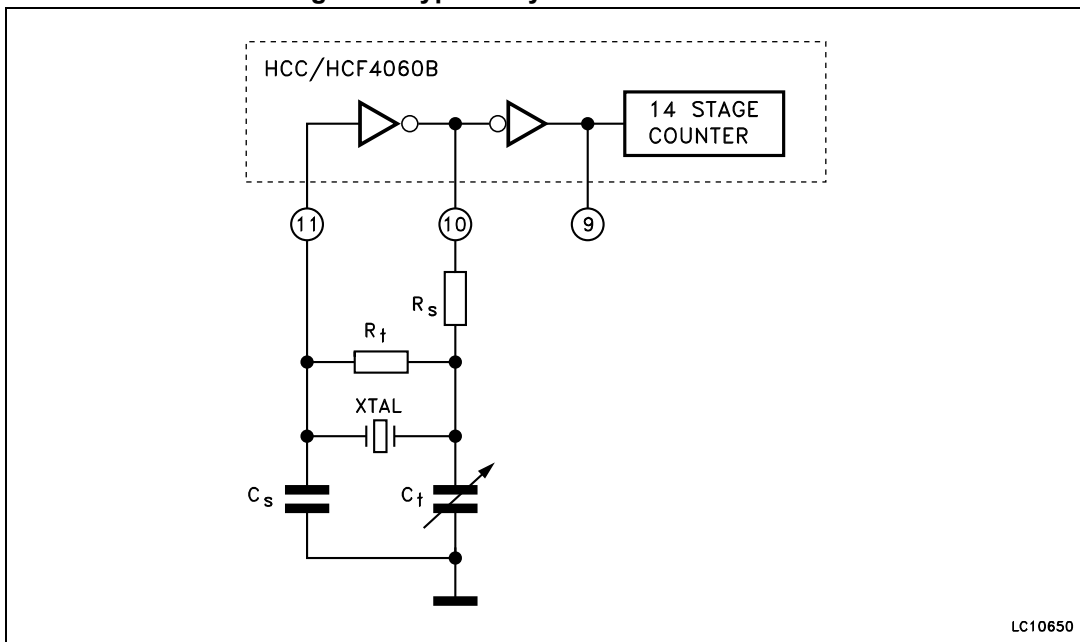

LC10650

## 4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK<sup>®</sup> packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

### 4.1 PDIP16 (0.25) package information

Figure 8. PDIP16 (0.25) package mechanical drawing


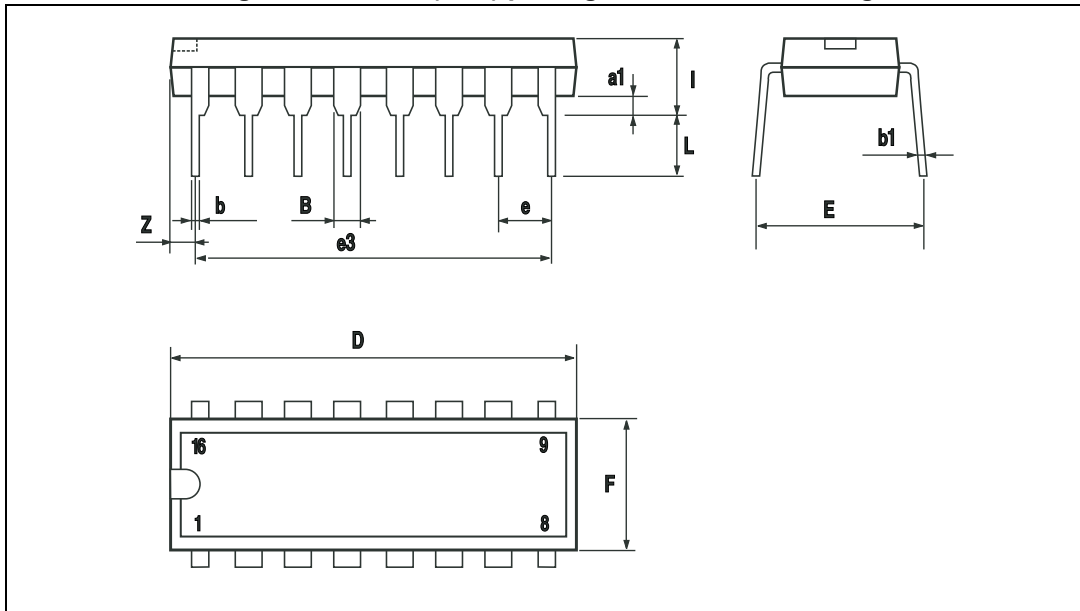


Table 7. PDIP16 (0.25) package mechanical data

| Symbol | Dimensions |       |      |       |       |       |
|--------|------------|-------|------|-------|-------|-------|
|        | mm         |       |      | inch  |       |       |
|        | Min.       | Typ.  | Max. | Min.  | Typ.  | Max.  |
| a1     | 0.51       |       |      | 0.020 |       |       |
| B      | 0.77       |       | 1.65 | 0.030 |       | 0.065 |
| b      |            | 0.5   |      |       | 0.020 |       |
| b1     |            | 0.25  |      |       | 0.010 |       |
| D      |            |       | 20   |       |       | 0.787 |
| E      |            | 8.5   |      |       | 0.335 |       |
| e      |            | 2.54  |      |       | 0.100 |       |
| e3     |            | 17.78 |      |       | 0.700 |       |
| F      |            |       | 7.1  |       |       | 0.280 |
| I      |            |       | 5.1  |       |       | 0.201 |
| L      |            | 3.3   |      |       | 0.130 |       |
| Z      |            |       | 1.27 |       |       | 0.050 |

## 4.2 SO16 package information

Figure 9. SO16 package mechanical drawing

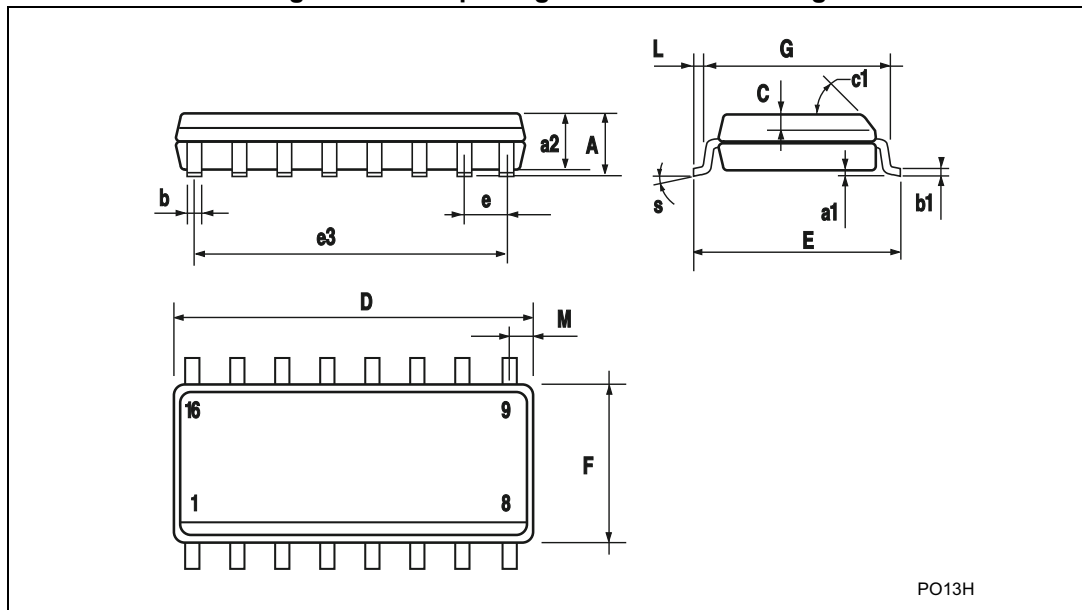

PO13H

Table 8. SO16 package mechanical data

| Symbol | Dimensions |      |      |       |       |       |
|--------|------------|------|------|-------|-------|-------|
|        | mm         |      |      | inch  |       |       |
|        | Min.       | Typ. | Max. | Min.  | Typ.  | Max.  |
| A      |            |      | 1.75 |       |       | 0.068 |
| a1     | 0.1        |      | 0.2  | 0.004 |       | 0.008 |
| a2     |            |      | 1.65 |       |       | 0.064 |
| b      | 0.35       |      | 0.46 | 0.013 |       | 0.018 |
| b1     | 0.19       |      | 0.25 | 0.007 |       | 0.010 |
| C      |            | 0.5  |      |       | 0.019 |       |
| c1     | 45° (typ.) |      |      |       |       |       |
| D      | 9.8        |      | 10   | 0.385 |       | 0.393 |
| E      | 5.8        |      | 6.2  | 0.228 |       | 0.244 |
| e      |            | 1.27 |      |       | 0.050 |       |
| e3     |            | 8.89 |      |       | 0.350 |       |
| F      | 3.8        |      | 4.0  | 0.149 |       | 0.157 |
| G      | 4.6        |      | 5.3  | 0.181 |       | 0.208 |
| L      | 0.5        |      | 1.27 | 0.019 |       | 0.050 |
| M      |            |      | 0.62 |       |       | 0.024 |
| S      | 8° (max.)  |      |      |       |       |       |

## 5 Ordering information

Table 9. Order codes

| Order code                    | Temperature range | Package                      | Packaging     | Marking   |
|-------------------------------|-------------------|------------------------------|---------------|-----------|
| HCF4060M013TR                 | -55/+125 °C       | SO16                         | Tape and reel | HCF4060   |
| HCF4060YM013TR <sup>(1)</sup> | -40/+125 °C       | SO16<br>(automotive version) |               | HCF4060Y  |
| HCF4060BEY                    | -55/+125 °C       | PDIP16                       | Tube          | HCF4066BE |

1. Qualification and characterization according to AEC Q100 and Q003 or equivalent, advanced screening according to AEC Q001 and Q002 or equivalent.

## 6 Revision history

Table 10. Document revision history

| Date        | Revision | Changes  |
|-------------|----------|--|
| 29-Oct-2012 | 5        | Updated <a href="#">Features</a> (added ESD values), added <a href="#">Applications</a> .<br>Updated <a href="#">Table 1</a> (reformatted table, added order codes, temperature range, marking, updated package and packaging, added note 1.).<br>Moved <a href="#">Description</a> to page 2, updated <a href="#">Description</a> (unified part numbers and package names).<br>Updated <a href="#">Section 2</a> to <a href="#">Section 4</a> (added titles and numbering).<br>Reformatted <a href="#">Section 4</a> (added ECOPACK text, <a href="#">Figure 8</a> , <a href="#">Figure 9</a> , <a href="#">Table 7</a> and <a href="#">Table 8</a> , unified package names).<br>Minor corrections throughout document. |
| 02-May-2013 | 6        | Updated <a href="#">Features</a> (ESD values)<br>Added <a href="#">Ordering information</a>  |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**ST PRODUCTS ARE NOT AUTHORIZED FOR USE IN WEAPONS. NOR ARE ST PRODUCTS DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2013 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)

