

Ultrafast Rectifier

MUR1520G

FEATURES



- Ultrafast with soft recovery
- Operating temperature
- Reverse voltage
- Avalanche energy rated
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS

- Switching power supply
- Power switching circuits
- General purpose

ABSOLUTE MAXIMUM RATINGS(T<sub>a</sub>=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V <sub>RRM</sub> V <sub>RWM</sub> V <sub>R</sub>	Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	200	V
I <sub>F(AV)</sub>	Average Rectified Forward Current	15	A
I <sub>FSM</sub>	Nonrepetitive Peak Surge Current (Surge applied at rated load conditions half-wave, single phase, 60Hz)	200	A
P <sub>D</sub>	Maximum power dissipation	100	W
T <sub>J</sub>	Junction Temperature	-55~175	°C
T <sub>stg</sub>	Storage Temperature Range	-55~175	°C

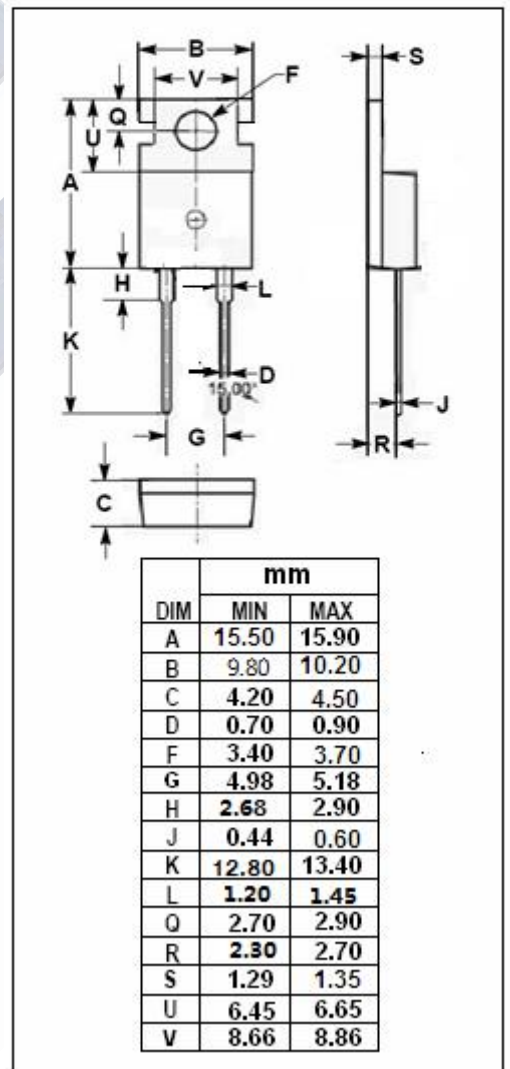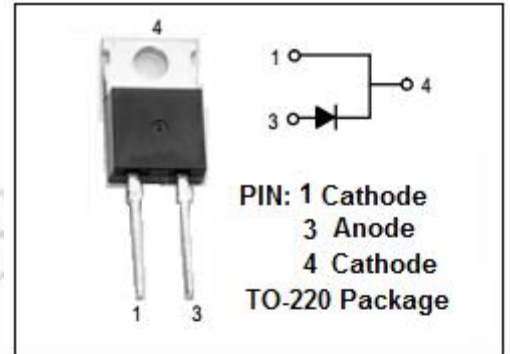

## Ultrafast Rectifier

## MUR1520G

## THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{thj-c}$	Thermal Resistance, Junction to Case	1.5	$^{\circ}\text{C}/\text{W}$

ELECTRICAL CHARACTERISTICS ( $T_a=25^{\circ}\text{C}$ ) (Pulse Test: Pulse Width=300  $\mu\text{s}$ , Duty Cycle  $\leq 2\%$ )

SYMBOL	PARAMETER	CONDITIONS	MAX	UNIT
$V_F$	Maximum Instantaneous Forward Voltage	$I_F=15\text{A}; T_j=25^{\circ}\text{C}$ $I_F=15\text{A}; T_j=150^{\circ}\text{C}$	1.05 0.85	V
$I_R$	Maximum Instantaneous Reverse Current	$V_R=V_{RWM}; T_j=150^{\circ}\text{C}$ $V_R=V_{RWM}$	500 10	$\mu\text{A}$
$t_{rr}$	Maximum Reverse Recovery Time	$I_F=1\text{A}; di/dt=50\text{A}/\mu\text{s}$	35	ns