

Isc N-Channel MOSFET Transistor


STB75NF75T4

• FEATURES

- With To-263(D2PAK) package
- Excellent switching performance
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation


• APPLICATIONS

- Switching applications

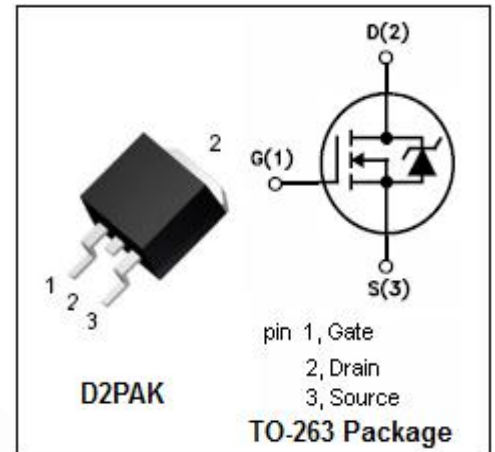

• ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage	75	V
V_{GSS}	Gate-Source Voltage	± 20	V
I_D	Drain Current-Continuous@ $T_c=25^\circ\text{C}$ ($T_J=175^\circ\text{C}$) $T_c=125^\circ\text{C}$	80 70	A
I_{DM}	Drain Current-Single Pulsed	320	A
P_D	Total Dissipation @ $T_c=25^\circ\text{C}$	300	W
T_{ch}	Max. Operating Junction Temperature	175	$^\circ\text{C}$
T_{stg}	Storage Temperature	-55~175	$^\circ\text{C}$

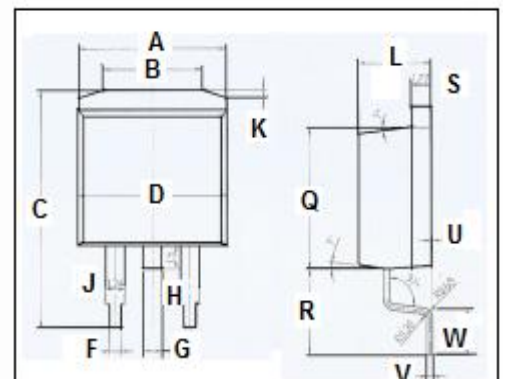

DIM	mm	
	MIN	MAX
A	10	
B	6.6	6.8
C	15.23	15.25
D	10.15	10.17
F	0.76	0.78
G	1.26	1.28
H	1.4	1.6
J	1.33	1.35
K	0.4	0.6
L	4.6	4.8
Q	8.69	8.71
R	5.28	5.30
S	1.26	1.28
U	0.0	0.2
V	0.37	0.39
W	2.80	2.82

• THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th(ch-c)}$	Channel-to-case thermal resistance	2.14	$^\circ\text{C/W}$
$R_{th(ch-a)}$	Channel-to-ambient thermal resistance	100	$^\circ\text{C/W}$

Isc N-Channel MOSFET Transistor**STB75NF75T4****ELECTRICAL CHARACTERISTICS**T_C=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V; I _D = 0.25mA	75			V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} = ±20V; I _D =0.25mA	2		4	V
R _{DS(on)}	Drain-Source On-Resistance	V _{GS} = 10V; I _D =40A		9.5	11	mΩ
I _{GSS}	Gate-Source Leakage Current	V _{GS} = ±20V; V _{DS} = 0V			±0.1	μA
I _{DSS}	Drain-Source Leakage Current	V _{DS} = 75V; V _{GS} = 0V; T _J =25°C T _J =125°C			1 10	μA
V _{SDF}	Diode forward voltage	I _{SD} =80A, V _{GS} = 0 V			1.5	V