

Ultra fast Rectifier

STTH16L06CFP

FEATURES



- With TO-220F packaging
- High performance fast recovery diode
- Low loss and soft recovery
- High current capability
- Low reverse leakage current
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS

- Switching power supply
- Power switching circuits
- General purpose

ABSOLUTE MAXIMUM RATINGS(T_a=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V _{RRM} V _{RWM} V _R	Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	600	V
I _{F(AV)}	Average Rectified Forward Current @T _c =80°C	16	A
I _{FSM}	Nonrepetitive Peak Surge Current (Surge applied at rated load conditions half-wave, single phase, 50Hz)	90	A
T _J	Junction Temperature	-65~175	°C
T _{stg}	Storage Temperature Range	-65~175	°C

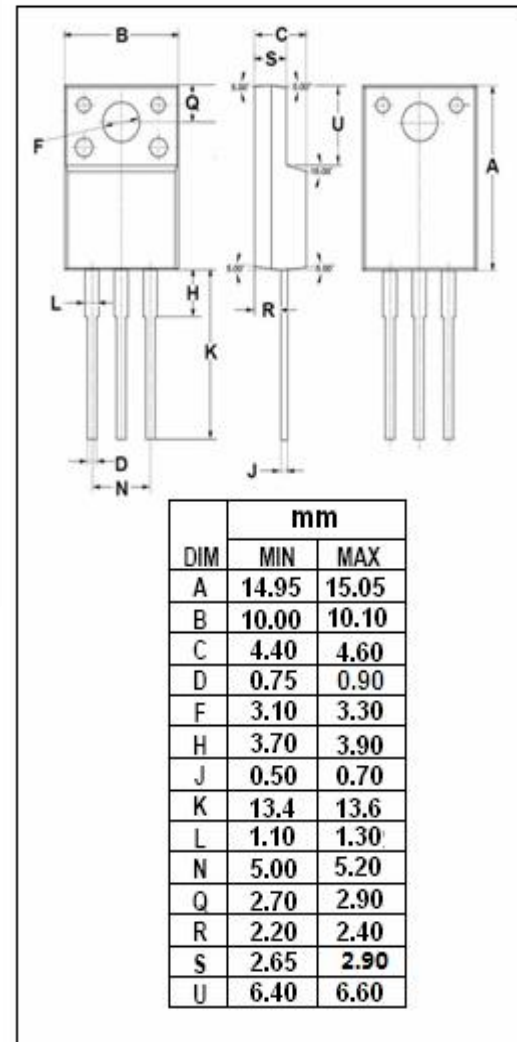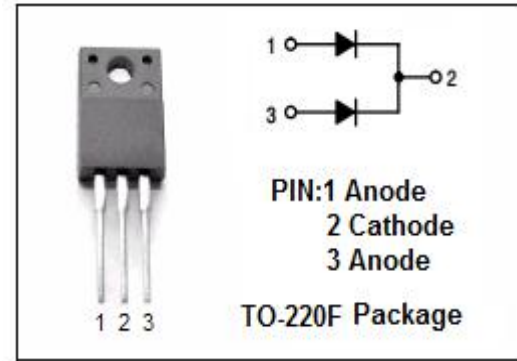

Ultra fast Rectifier

STTH16L06CFP

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th,j-c}$	Thermal Resistance, Junction to Case	5.0	$^{\circ}C/W$

ELECTRICAL CHARACTERISTICS ($T_a=25^{\circ}C$) (Pulse Test: Pulse Width=300 μ s, Duty Cycle $\leq 2\%$)

SYMBOL	PARAMETER	CONDITIONS	MAX	UNIT
V_F	Maximum Instantaneous Forward Voltage	$I_F=8A; T_c=25^{\circ}C$ $I_F=8A; T_c=150^{\circ}C$ $I_F=16A; T_c=25^{\circ}C$ $I_F=16A; T_c=150^{\circ}C$	1.80 1.35 2.08 1.64	V
I_R	Maximum Instantaneous Reverse Current	$V_R=V_{RWM}; T_j=25^{\circ}C$ $V_R=V_{RWM}; T_j=150^{\circ}C$	8 240	μA
t_{rr}	Maximum Reverse Recovery Time	$I_F=0.5A; I_R=1A; I_{rr}=0.25A$	35	ns