

connecting everything®





AIRFORCE 54G® 802.11A/B/G PCI EXPRESS® CLIENT REFERENCE DESIGN

FEATURES

- IEEE 802.11a/g CMOS MAC/Baseband client solution with BroadRange[™] for PCI Express[®] conections. Flexible design provides an 802.11b/g or 802.11a/g solution when paired with an appropriate radio.
- Supports Wireless Form Factor (WFF) PCI Express cards for desktop PCs, Wireless on Motherboard (WOMBO) notebook modules, and embedded Wi-Fi[®] applications for 54g[®] to PCI Express connections.
- High-speed serial bus supports x1 lane running at 2.5 Gbps in each direction for improved Quality of Service (QoS), Error Detection, Power Management, Hot Plug/Hot Swap capability, and simplified board layout.
- Includes BroadRange signal processing for industry-leading receive sensitivity and extended range.
- Highly integrated chipset provides low cost, low power, and small footprint for integration in a broad range of devices.
- WHQL-certified drivers for Windows[®] XP, Windows[®] Me, Windows[®] 2000, Windows[®] 98SE, and Windows[®] 98 operating systems, portable to Linux[®] and Windows[®] CE.
- USB 1.1 host for expanded Bluetooth[®] connectivity and coexistence.
- 4-KB one-time programmable (OTP) memory for customer-defined parameters.
- Industry-standard UART and JTAG interfaces to manage other serial devices for in-system testing.
- On-chip 1.8V/2.5V regulators reduce component cost and power dissipation and simplify PCB design.

POWER MANAGEMENT

- DSP architecture reduces the power required to transmit data by 30%.
- Low-power consumption improves battery life of Wi-Fi devices, including handheld devices and consumer electronics.
- Meets PCI Power Management Interface version 1.1 (ACPI).
- Designed for low CPU usage to ensure these CPU resources are available for handheld applications.


AIRFORCE FEATURE SET

- SmartRadioTM: Continuous calibration reduces test time and improves manufacturability.
- Xpress[™] Technology: Standards-based frame bursting improves overall network efficiency.
- 125 High Speed Mode[™]: Standards-plus performance enhancement delivers best real-world performance when both client and AP support high speed mode.
- BroadRange Technology: Standards-compliant feature increases receive sensitivity to improve range at the higher data rates.
- Security:
 - WPA- and WPA2-CERTIFIEDTM for powerful encryption and authentication.
 - AES in hardware for faster data encryption and 802.11i compatibility
 - Cisco[®] Compatible Extensions (CCX, CCX 2.0) certified
- SecureEasySetup^ ${\ensuremath{\mathsf{TM}}}$ for simple Wi-Fi setup and WPA security configuration
- Worldwide support: Global products supported with worldwide homologated design.



802.11b/g PCI Express Reference Design


BCM94311 Reference Design



802.11a/g PCI Express Reference Design



OVERVIEW

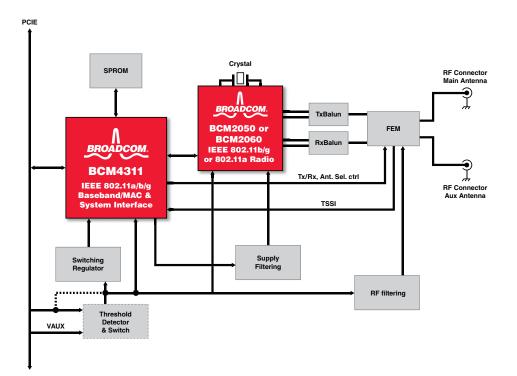

BCM94311 Functional Block Diagram

BCM94311 Specifications

Item	Description
Interface	USB 1.1 Host interface, PCIe [™] , GPIO, UART, JTAG
System bus support	PCIe
Standard	IEEE 802.11g with external radio BCM2050, 802.11a with external radio BCM2060
Data rate	802.11g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps; 802.11b, 11, 5.5, 2, 1 Mbps
Modulation	OFDM, CCK, DQPSK, DBPSK
Network architectures	Infrastructure and ad hoc
Operating frequencies	2.4 GHz-2.497 GHz, 4.9 GHz -5.85 GHz with 2060 option
Operating channels	11 for North America; 13 for Europe, and 14 for Japan
RF output power	20 dBm maximum
Antenna connectors	Hardware diversity support—Transmit and Receive
Power requirements	3.3V for reference designs
Security	802.1x; WEP; WEP2; WPA, WPA2; TKIP; WEP128; Weak-key avoidance; CCX, CCX 2.0; 128-bit OCB mode AES, 802.11i
Software support	Microsoft [®] WHQL certified for Windows XP, Windows 2000, Windows Me, WindowsSE, and Linux operating systems.
Certifications	IEEE 802.11 compliant; WI-FI CERTIFIED™; ACPI power management

ORDERING INFORMATION

- BCM4311: 196-pin package
- BCM94311: Reference design

Broadcom[®], the pulse logo, **Connecting everything**[®], BroadRangeTM, 54g[®], 125 High Speed ModeTM, SecureEasySetupTM, and the Connecting everything logo are among the trademarks of Broadcom Corporation and/or its affiliates in the United States, certain other countries and/or the EU. Any other trademarks or trade names mentioned are the property of their respective owners.

connecting everything® BROADCOM.

Phone: 949-450-8700

E-mail: info@broadcom.com Web: www.broadcom.com

Fax: 949-450-8710

BROADCOM CORPORATION 16215 Alton Parkway, P.O. Box 57013 Irvine, California 92619-7013

Irvine, California 92619-7013 © 2006 by BROADCOM CORPORATION. All rights reserved.

94311-PB01-R 03/15/06