


## 10 A Snubberless™, logic level and standard Triacs

Datasheet - production data

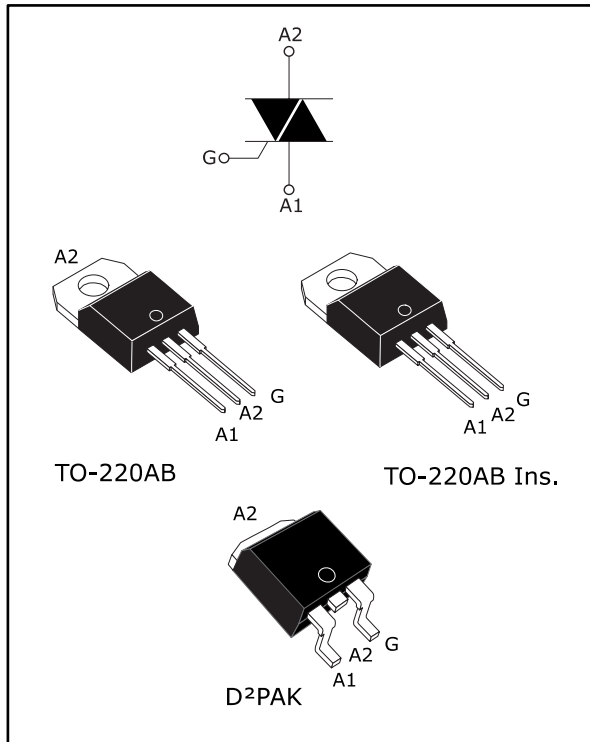

### Description

Available either in through-hole or surface mount packages, the BTA10, BTB10 and T10xx Triac series are suitable for general purpose mains power AC switching. They can be used as ON/OFF function in applications such as static relays, heating regulation or induction motor starting circuit. They are also recommended for phase control operations in light dimmers and appliance motors speed controllers.

The Snubberless™ versions (W suffix and T10xx) are especially recommended for use on inductive loads, because of their high commutation performance. By using an internal ceramic pad, the Snubberless™ series provide an insulated tab (rated at 2500 V<sub>RMS</sub>) complying with UL standards (file reference: E81734).

Table 1: Device summary

| Symbol            | Parameter                         | BTA10, BTB10, T10xx |
|-------------------|-----------------------------------|---------------------|
| $I_{T(RMS)}$      | RMS on-state current              | 10 A                |
| $V_{DRM}/V_{RRM}$ | Repetitive peak off-state voltage | 600 and 800 V       |
| $I_{GT}$          | Triggering gate current           | 25 to 50 mA         |

### Features

- Medium current triac
- Low thermal resistance with clip bonding
- Low thermal resistance insulation ceramic for insulated BTA
- High commutation (4Q) or very high commutation (3Q, Snubberless™) capability
- BTA series UL1557 certified (file ref: 81734)
- Packages are RoHS (2002/95/EC) compliant

# 1 Characteristics

**Table 2: Absolute maximum ratings**

| Symbol            | Parameter   |                         | Value                  | Unit                    |             |
|-------------------|---|-------------------------|------------------------|-------------------------|-------------|
| $I_{T(RMS)}$      | RMS on-state current (full sine wave)   | TO-220AB                | $T_c = 105\text{ °C}$  | 10                      | A           |
|                   |   | TO-220AB Ins.           | $T_c = 95\text{ °C}$   |                         |             |
| $I_{TSM}$         | Non repetitive surge peak on-state current (full cycle, $T_j$ initial = $25\text{ °C}$ )        | F = 50 Hz               | $t_p = 20\text{ ms}$   | 100                     | A           |
|                   |   | F = 60 Hz               | $t_p = 16.7\text{ ms}$ | 105                     |             |
| $I^2t$            | $I^2t$ value for fusing   | $t_p = 10\text{ ms}$    |                        | 55                      | $A^2s$      |
| $di/dt$           | Critical rate of rise of on-state current<br>$I_G = 2 \times I_{GT}$ , $t_r \leq 100\text{ ns}$ | F = 120 Hz              | $T_j = 125\text{ °C}$  | 50                      | $A/\mu s$   |
| $V_{DSM}/V_{RSM}$ | Non repetitive surge peak off-state voltage   | $t_p = 10\text{ ms}$    | $T_j = 25\text{ °C}$   | $V_{DRM}/V_{RRM} + 100$ | V           |
| $I_{GM}$          | Peak gate current   | $t_p = 20\text{ }\mu s$ | $T_j = 125\text{ °C}$  | 4                       | A           |
| $P_{G(AV)}$       | Average gate power dissipation  |                         | $T_j = 125\text{ °C}$  | 1                       | W           |
| $T_{stg}$         | Storage junction temperature range  |                         |                        | -40 to +150             | $^{\circ}C$ |
| $T_j$             | Operating junction temperature range  |                         |                        | -40 to +125             | $^{\circ}C$ |

**Table 3: Static electrical characteristics**

| Symbol            | Test Conditions                                   | $T_j$                  |      | Value | Unit      |
|-------------------|---|------------------------|------|-------|-----------|
| $V_T^{(1)}$       | $I_{TM} = 14\text{ A}$ , $t_p = 380\text{ }\mu s$ | $25\text{ }^{\circ}C$  | Max. | 1.55  | V         |
| $V_{TO}$          | threshold on-state voltage                        | $125\text{ }^{\circ}C$ | Max. | 0.85  | V         |
| $R_D$             | Dynamic resistance                                | $125\text{ }^{\circ}C$ | Max. | 40    | $m\Omega$ |
| $I_{DRM}/I_{RRM}$ | $V_{DRM} = V_{RRM}$                               | $25\text{ }^{\circ}C$  | Max. | 5     | $\mu A$   |
|                   |   | $125\text{ }^{\circ}C$ |      | 1     | $mA$      |

**Notes:**

<sup>(1)</sup>For both polarities of A2 referenced to A1

Table 4: Electrical characteristics ( $T_j = 25\text{ }^\circ\text{C}$ , unless otherwise specified) - Snubberless™ (3 quadrants)

| Symbol            | Parameter   | Quadrant     |      | BTA10/BTB10 |      | T1050            | Unit |
|-------------------|---|--------------|------|-------------|------|------------------|------|
|                   |   |              |      | CW          | BW   |                  |      |
| $I_{GT}^{(1)}$    | $V_D = 12\text{ V}$ , $R_L = 33\ \Omega$  | I - II - III | Max. | 35          | 50   | mA               |      |
| $V_{GT}$          |   | I - II - III | Max. | 1.3         |      |                  | V    |
| $V_{GD}$          | $V_D = V_{DRM}$ , $R_L = 3,3\text{ k}\Omega$ ,<br>$T_j = 125\text{ }^\circ\text{C}$ | I - II - III | Min. | 0.2         |      | V                |      |
| $I_H^{(2)}$       | $I_T = 500\text{ mA}$   |              | Max. | 35          | 50   | mA               |      |
| $I_L$             | $I_G = 1.2\ I_{GT}$   | I - III      | Max. | 50          | 70   | mA               |      |
|                   |   | II           | Max. | 60          | 80   |                  |      |
| $dV/dt^{(2)}$     | $V_D = 67\% V_{DRM}$ gate open,<br>$T_j = 125\text{ }^\circ\text{C}$                |              | Min. | 500         | 1000 | V/ $\mu\text{s}$ |      |
| $(dI/dt)_c^{(2)}$ | $(dI/dt)_c = 5.3\text{ A/ms}$ , $T_j = 125\text{ }^\circ\text{C}$                   |              | Min. | 5.5         | 9    | A/ms             |      |

**Notes:**(1) Minimum  $I_{GT}$  is guaranteed at 5 % of  $I_{GT}$  max.

(2) For both polarities of A2 referenced to A1

Table 5: Electrical characteristics ( $T_j = 25\text{ }^\circ\text{C}$ , unless otherwise specified) - standard Triac (4 quadrants)

| Symbol            | Parameter  | Quadrant     |      | Value |     | Unit             |
|-------------------|--|--------------|------|-------|-----|------------------|
|                   |  |              |      | C     | B   |                  |
| $I_{GT}^{(1)}$    | $V_D = 12\text{ V}$ , $R_L = 33\ \Omega$   | I - II - III | Max. | 25    | 50  | mA               |
|                   |  | IV           | Max. | 50    | 100 |                  |
| $V_{GT}$          |  | All          | Max. | 1.3   |     | V                |
| $V_{GD}$          | $V_D = V_{DRM}$ , $R_L = 3,3\text{ k}\Omega$ , $T_j = 125\text{ }^\circ\text{C}$ | I - II - III | Min. | 0.2   |     | V                |
| $I_H^{(2)}$       | $I_T = 500\text{ mA}$  |              | Max. | 25    | 50  | mA               |
| $I_L$             | $I_G = 1.2\ I_{GT}$  | I - III      | Max. | 40    | 50  | mA               |
|                   |  | II           | Max. | 80    | 100 |                  |
| $dV/dt^{(2)}$     | $V_D = 67\% V_{DRM}$ gate open, $T_j = 125\text{ }^\circ\text{C}$                |              | Min. | 200   | 400 | V/ $\mu\text{s}$ |
| $(dV/dt)_c^{(2)}$ | $(dI/dt)_c = 4.4\text{ A/ms}$ , $T_j = 125\text{ }^\circ\text{C}$                |              | Min. | 5     | 10  | V/ $\mu\text{s}$ |

**Notes:**(1) Minimum  $I_{GT}$  is guaranteed at 5 % of  $I_{GT}$  max.

(2) For both polarities of A2 referenced to A1







Table 6: Thermal resistance

| Symbol               | Parameter  |                               | Value | Unit |
|----------------------|--|-------------------------------|-------|------|
| $R_{th(j-c)}$ (typ.) | Junction to case (AC)                              | TO-220AB / D <sup>2</sup> PAK | 1.5   | °C/W |
|                      |  | TO-220AB insulated            | 2.4   |      |
| $R_{th(j-a)}$ (max.) | Junction to ambient ( $S^{(1)} = 1 \text{ cm}^2$ ) | D <sup>2</sup> PAK            | 45    |      |
|                      | Junction to ambient                                | TO-220AB / TO-220AB ins       | 60    |      |


**Notes:**

<sup>(1)</sup>Copper surface under tab.


### 1.1 Characteristics (curves)

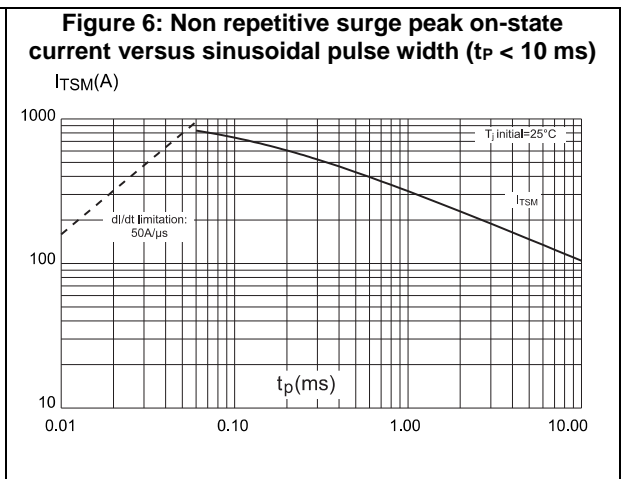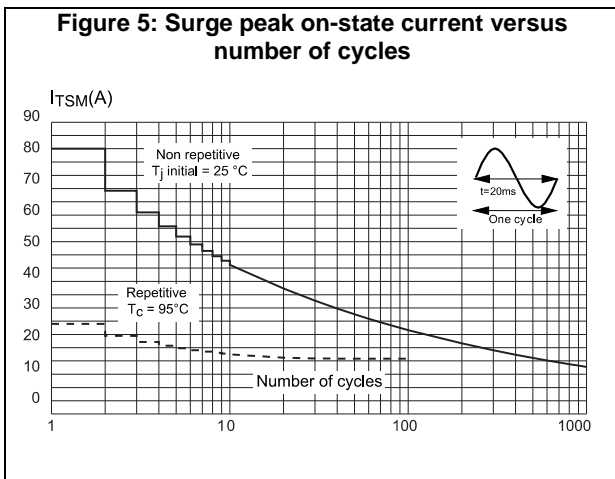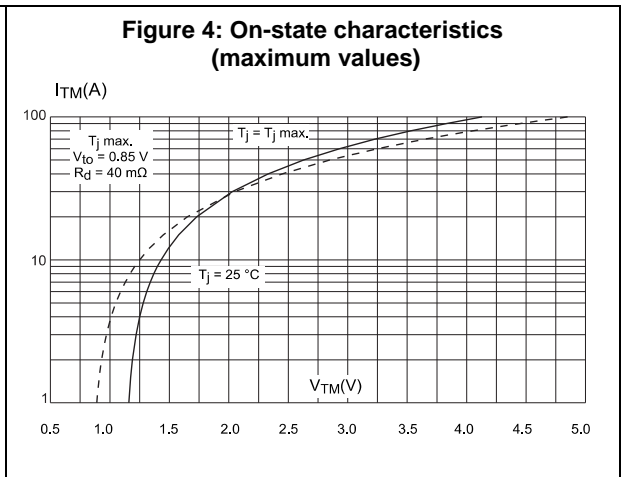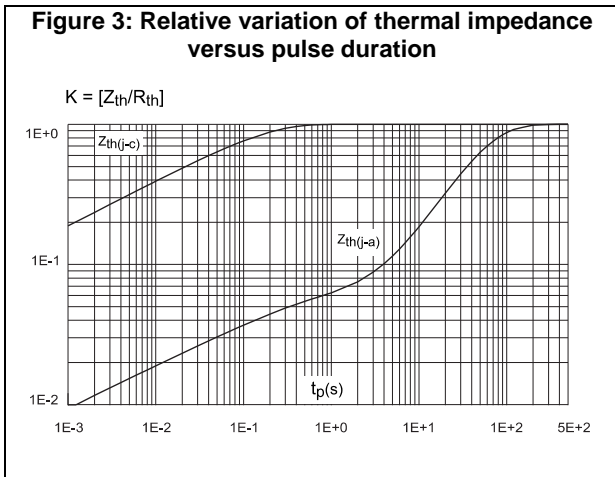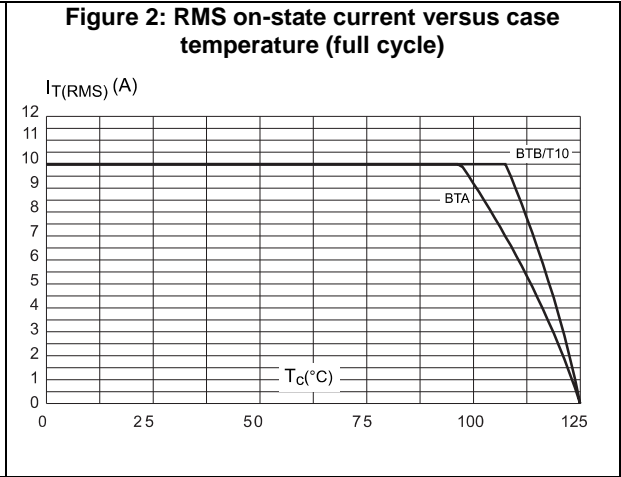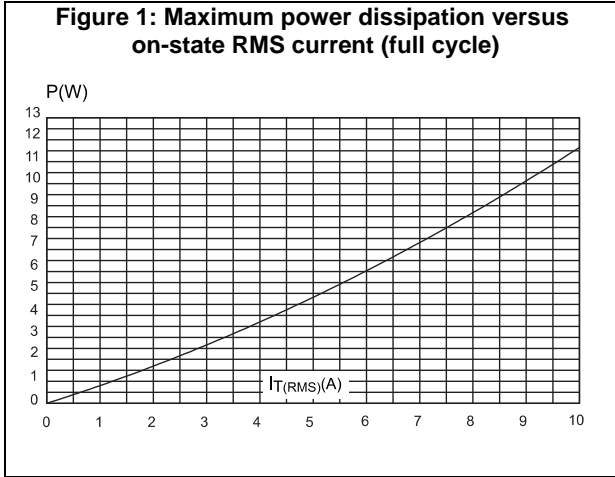


**Figure 7: Relative variation of gate trigger current, holding current and latching current versus junction temperature (typical values)**

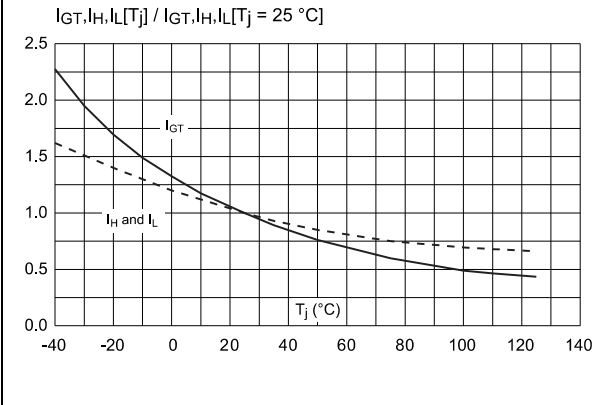


**Figure 8: Relative variation of critical rate of decrease of main current versus  $(dV/dt)_c$  (typical values)**

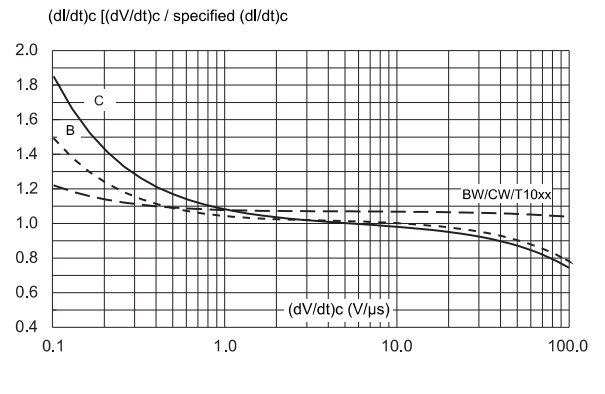

**Figure 9: Relative variation of critical rate of decrease of main current versus junction temperature**

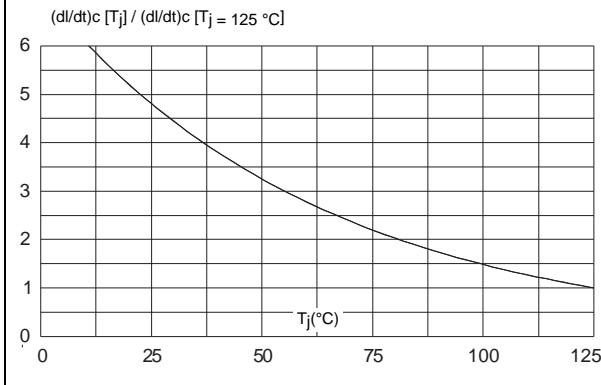

**Figure 10: D2PAK thermal resistance junction to ambient versus copper surface under tab**

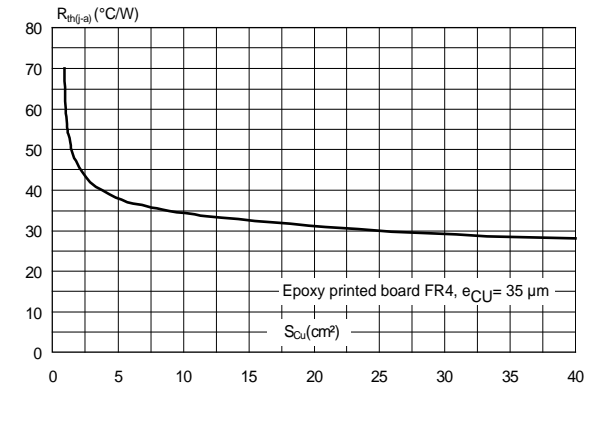

## 2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

- Epoxy meets UL 94,V0
- Lead-free package

### 2.1 D<sup>2</sup>PAK package information

Figure 11: D<sup>2</sup>PAK package outline

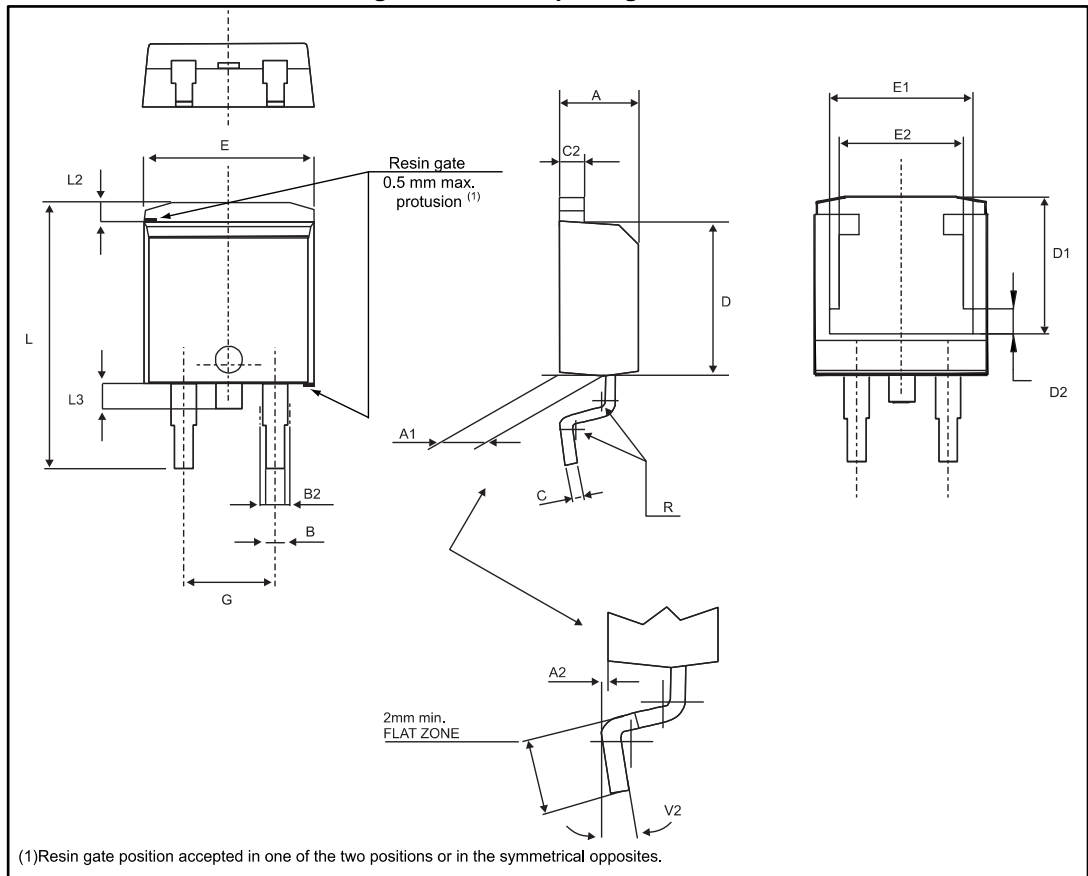



Table 7: D<sup>2</sup>PAK package mechanical data

| Ref. | Dimensions  |      |       |                       |        |        |
|------|-------------|------|-------|-----------------------|--------|--------|
|      | Millimeters |      |       | Inches <sup>(1)</sup> |        |        |
|      | Min.        | Typ. | Max.  | Min.                  | Typ.   | Max.   |
| A    | 4.30        |      | 4.60  | 0.1693                |        | 0.1811 |
| A1   | 2.49        |      | 2.69  | 0.0980                |        | 0.1059 |
| A2   | 0.03        |      | 0.23  | 0.0012                |        | 0.0091 |
| B    | 0.70        |      | 0.93  | 0.0276                |        | 0.0366 |
| B2   | 1.25        | 1.40 |       | 0.0492                | 0.0551 |        |
| C    | 0.45        |      | 0.60  | 0.0177                |        | 0.0236 |
| C2   | 1.21        |      | 1.36  | 0.0476                |        | 0.0535 |
| D    | 8.95        |      | 9.35  | 0.3524                |        | 0.3681 |
| D1   | 7.50        |      | 8.00  | 0.2953                |        | 0.3150 |
| D2   | 1.30        |      | 1.70  | 0.0512                |        | 0.0669 |
| E    | 10.00       |      | 10.28 | 0.3937                |        | 0.4047 |
| E1   | 8.30        |      | 8.70  | 0.3268                |        | 0.3425 |
| E2   | 6.85        |      | 7.25  | 0.2697                |        | 0.2854 |
| G    | 4.88        |      | 5.28  | 0.1921                |        | 0.2079 |
| L    | 15          |      | 15.85 | 0.5906                |        | 0.6240 |
| L2   | 1.27        |      | 1.40  | 0.0500                |        | 0.0551 |
| L3   | 1.40        |      | 1.75  | 0.0551                |        | 0.0689 |
| R    |             | 0.40 |       |                       | 0.0157 |        |
| V2   | 0°          |      | 8°    | 0°                    |        | 8°     |

Notes:

<sup>(1)</sup>Dimensions in inches are given for reference only

Figure 12: D<sup>2</sup>PAK recommended footprint (dimensions are in mm)

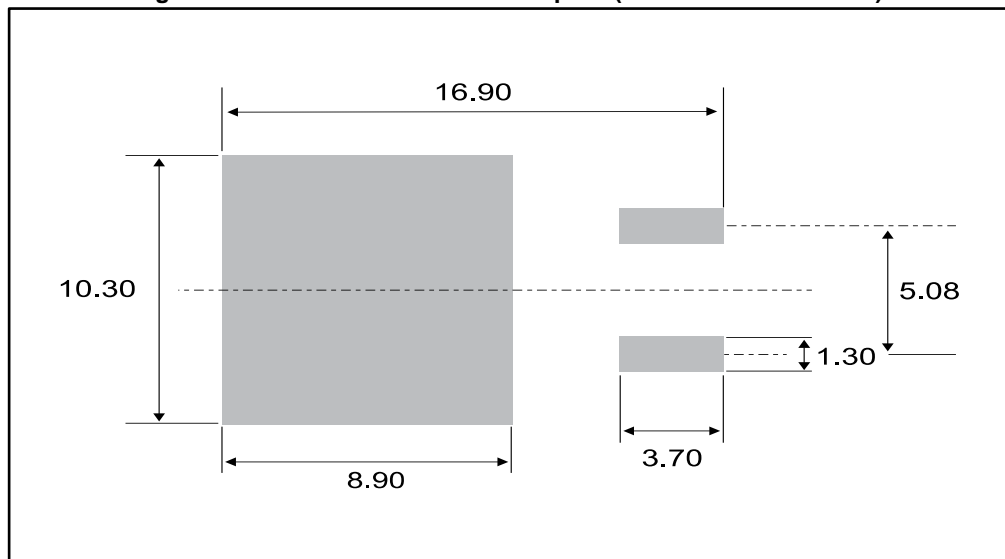



## 2.2 TO-220AB (NIns. and Ins.) package information

Figure 13: TO-220AB (NIns. & Ins.) package outline

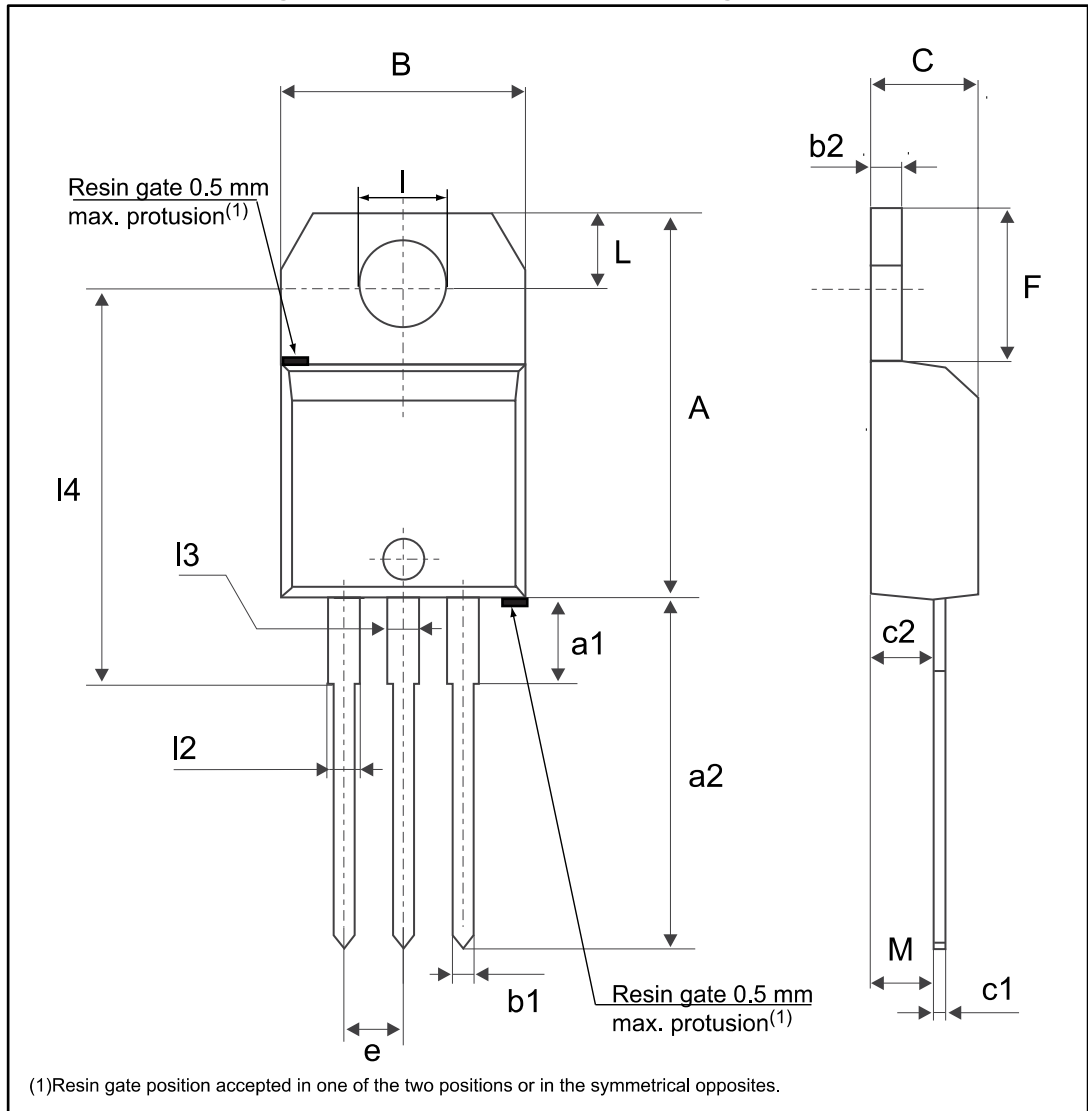


Table 8: TO-220AB (NIns. &amp; Ins.) package mechanical data

| Ref. | Dimensions  |       |       |                       |        |        |
|------|-------------|-------|-------|-----------------------|--------|--------|
|      | Millimeters |       |       | Inches <sup>(1)</sup> |        |        |
|      | Min.        | Typ.  | Max.  | Min.                  | Typ.   | Max.   |
| A    | 15.20       |       | 15.90 | 0.5984                |        | 0.6260 |
| a1   |             | 3.75  |       |                       | 0.1476 |        |
| a2   | 13.00       |       | 14.00 | 0.5118                |        | 0.5512 |
| B    | 10.00       |       | 10.40 | 0.3937                |        | 0.4094 |
| b1   | 0.61        |       | 0.88  | 0.0240                |        | 0.0346 |
| b2   | 1.23        |       | 1.32  | 0.0484                |        | 0.0520 |
| C    | 4.40        |       | 4.60  | 0.1732                |        | 0.1811 |
| c1   | 0.49        |       | 0.70  | 0.0193                |        | 0.0276 |
| c2   | 2.40        |       | 2.72  | 0.0945                |        | 0.1071 |
| e    | 2.40        |       | 2.70  | 0.0945                |        | 0.1063 |
| F    | 6.20        |       | 6.60  | 0.2441                |        | 0.2598 |
| I    | 3.73        |       | 3.88  | 0.1469                |        | 0.1528 |
| L    | 2.65        |       | 2.95  | 0.1043                |        | 0.1161 |
| I2   | 1.14        |       | 1.70  | 0.0449                |        | 0.0669 |
| I3   | 1.14        |       | 1.70  | 0.0449                |        | 0.0669 |
| I4   | 15.80       | 16.40 | 16.80 | 0.6220                | 0.6457 | 0.6614 |
| M    |             | 2.6   |       |                       | 0.1024 |        |

**Notes:**

<sup>(1)</sup>Inch dimensions are for reference only.

### 3 Ordering information

Figure 14: BTA10 and BTB10 series ordering information scheme

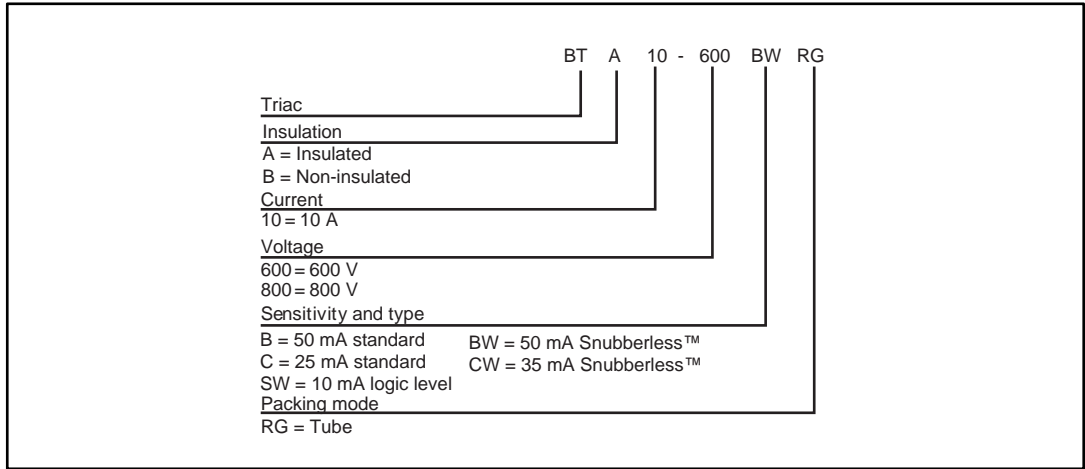


Figure 15: T10xx series ordering information scheme

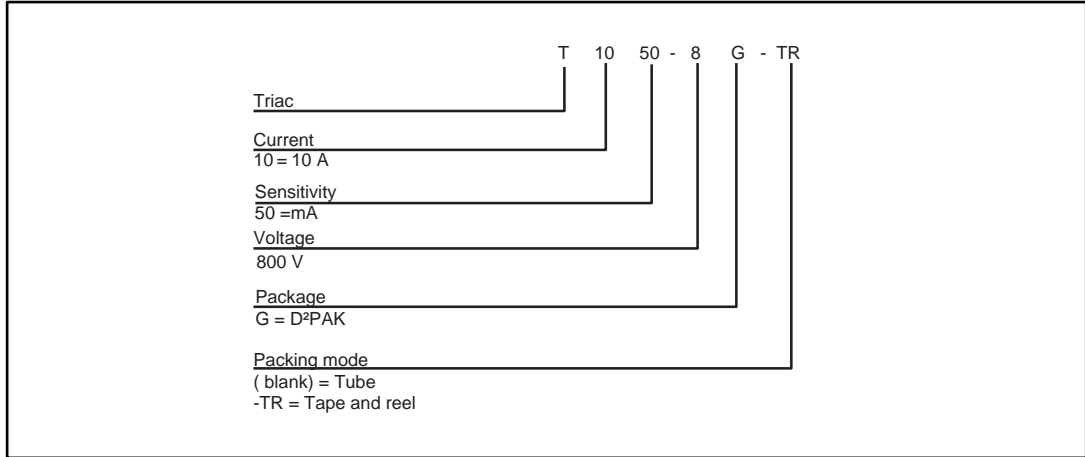


Table 9: Ordering information

| Order code    | Marking     | Package            | Weight | Base qty. | Delivery mode            |
|---------------|-------------|--------------------|--------|-----------|--------------------------|
| BTA10-600BRG  | BTA10-600B  | TO-220AB Ins.      | 2.3 g  | 50        | Tube                     |
| BTA10-600CRG  | BTA10-600C  |                    |        |           |                          |
| BTA10-600BWRG | BTA10-600BW |                    |        |           |                          |
| BTA10-600CWRG | BTA10-600CW |                    |        |           |                          |
| BTA10-800BWRG | BTA10-800BW |                    |        |           |                          |
| BTA10-800CWRG | BTA10-600CW |                    |        |           |                          |
| BTB10-600BWRG | BTB10-600BW | TO-220AB           |        |           |                          |
| BTB10-800BWRG | BTB10-800BW |                    |        |           |                          |
| T1050-8G      | T1050-8G    | D <sup>2</sup> PAK | 1.38 g | 1000      | Tape and reel<br>13"Tube |
| T1050-8G-TR   | T1050-8G    |                    |        |           |                          |

## 4 Revision history

Table 10: Document revision history

| Date        | Revision | Changes  |
|-------------|----------|--|
| Sep-2002    | 5A       | Last update.   |
| 13-Feb-2006 | 6        | TO-220AB delivery mode changed from bulk to tube. ECOPACK statement added. |
| 06-Feb-2017 | 7        | Added D <sup>2</sup> PAK package information.                              |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2017 STMicroelectronics – All rights reserved