

MGA-30689

40MHz - 3000MHz

Flat Gain High Linearity Gain Block



Data Sheet

Description

Avago Technologies' MGA-30689 is a flat gain, high linearity, low noise, 22dBm Gain Block with good OIP3 achieved through the use of Avago Technologies' proprietary 0.25um GaAs Enhancement-mode pHEMT process.


The device required simple dc biasing components to achieve wide bandwidth performance. The temperature compensated internal bias circuit provides stable current over temperature and process threshold voltage variation.

The MGA-30689 is housed inside a standard SOT89 package (4.5 x 4.1 x 1.5 mm).

Applications

- IF amplifier, RF driver amplifier
- General purpose gain block

Component Image

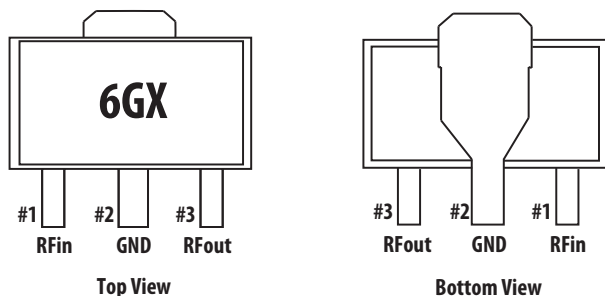

Notes:

Package marking provides orientation and identification

"6G" = Device Code

"X" = Month of manufacture

Features

- Flat Gain 14dB +/-0.5dB, 40MHz to 2600MHz
- High linearity
- Built in temperature compensated internal bias circuitry
- No RF matching components required
- GaAs E-pHEMT Technology^[1]
- Standard SOT89 package
- Single, Fixed 5V supply
- Excellent uniformity in product specifications
- MSL-2 and Lead-free halogen free
- High MTTF for base station application

Specifications

- 900MHz; 5V, 104mA (typical)
 - 14.3 dB Gain
 - 43 dBm Output IP3
 - 3.0 dB Noise Figure
 - 22.3 dBm Output Power at 1dB gain compression
- 1950MHz, 5V, 104mA (typical)
 - 14.6 dB Gain
 - 40 dBm Output IP3
 - 3.3 dB Noise Figure
 - 22.5 dBm Output Power at 1dB gain compression

Note:

1. Enhancement mode technology employs positive gate voltage, thereby eliminating the need of negative gate voltage associated with conventional depletion mode devices.



Attention: Observe precautions for handling electrostatic sensitive devices.

ESD Machine Model = 75 V

ESD Human Body Model = 450 V

Refer to Avago Application Note A004R:

Electrostatic Discharge, Damage and Control.

Absolute Maximum Rating ^[2] T_A=25°C

| Symbol | Parameter | Units | Absolute Max. |
|---------------------|--|-------|---------------|
| V _{dd,max} | Device Voltage, RF output to ground | V | 5.5 |
| P _{in,max} | CW RF Input Power | dBm | 20 |
| P _{diss} | Total Power Dissipation ^[4] | W | 0.75 |
| T _{j,max} | Junction Temperature | °C | 150 |
| T _{STG} | Storage Temperature | °C | -65 to 150 |

Thermal Resistance ^[3] $\theta_{jc} = 53.5^{\circ}\text{C}/\text{W}$
(V_{dd} = 5V, I_{ds} = 100mA, T_c = 85°C)

Notes:

2. Operation of this device in excess of any of these limits may cause permanent damage.
3. Thermal resistance measured using Infrared measurement technique.
4. This is limited by maximum V_{dd} and I_{ds}. Derate 18.7 mW/°C for T_c>110°C.

Product Consistency Distribution Charts^[5, 6]

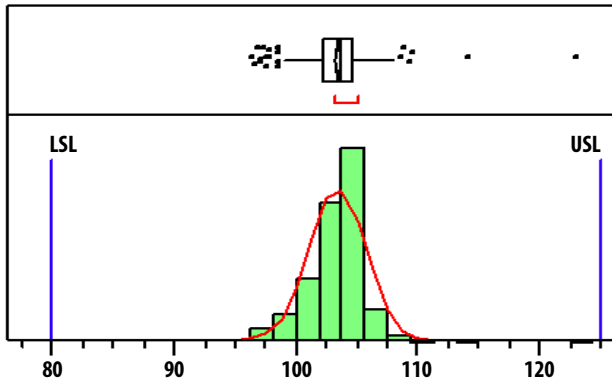


Figure 1. I_{ds}, LSL=80mA, nominal=104mA, USL=125mA

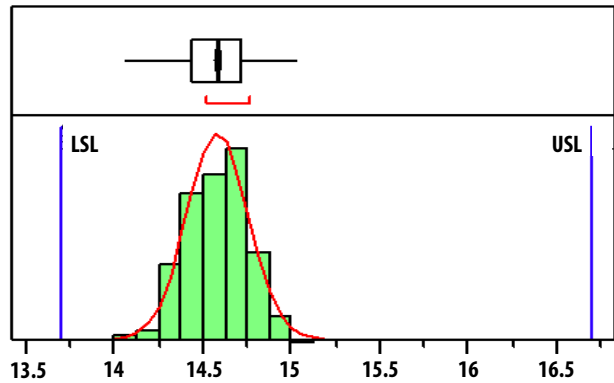


Figure 2. Gain, LSL=13.7dB, nominal=14.6dB, USL=16.7dB

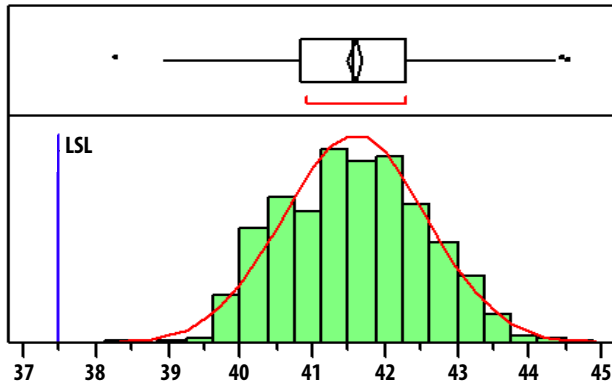


Figure 3. OIP3, LSL=37.5dBm, nominal=41.5dBm

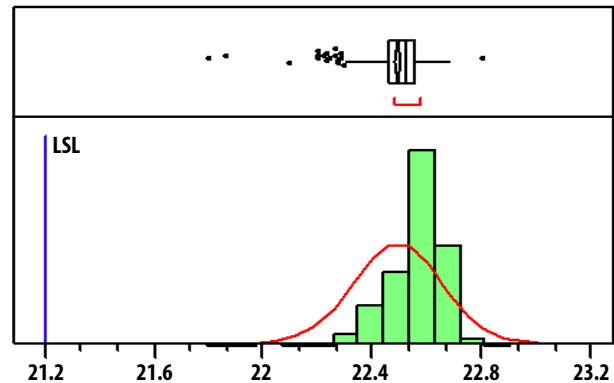


Figure 4. P1dB, LSL=21.2dBm, nominal=22.5dBm

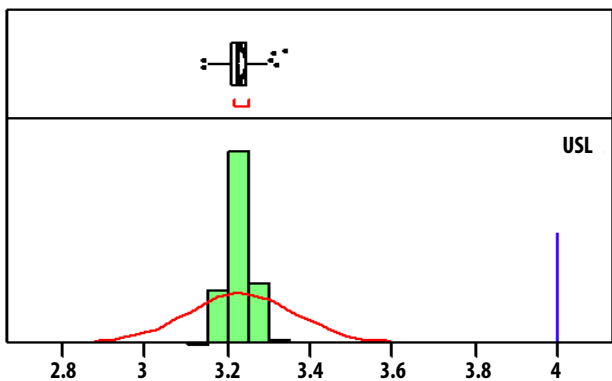


Figure 5. NF, nominal=3.23dB, USL=4dB

Notes:

5. Distribution data sample size is 500 samples taken from 3 different wafer lots and 6 different wafers. Future wafers allocated to this product may have nominal values anywhere between the upper and lower limits.
6. Measurements were made on a characterization test board, which represents a trade-off between optimal OIP3, gain and P1dB. Circuit trace losses have not been de-embedded from measurements above.

Electrical Specifications [7]

$T_A = 25^\circ\text{C}$, $V_{dd} = 5\text{V}$

| Symbol | Parameter and Test Condition | Frequency | Units | Min. | Typ. | Max. |
|----------|--------------------------------------|----------------------------|-------|------|----------------------|------|
| I_{ds} | Quiescent current | N/A | mA | 80 | 104 | 125 |
| Gain | Gain | 40MHz 900MHz 1950MHz | dB | | 14.8 14.3 14.6 | 16.7 |
| OIP3 [8] | Output Third Order Intercept Point | 40MHz 900MHz 1950MHz | dBm | | 40 43 40 | - |
| NF | Noise Figure | 40MHz 900MHz 1950MHz | dB | | 2.9 3.0 3.3 | 4 |
| S11 | Input Return Loss, 50Ω source | 40MHz 900MHz 1950MHz | dB | | -13 -12 -15 | |
| S22 | Output Return Loss, 50Ω load | 40MHz 900MHz 1950MHz | dB | | -18 -15 -12 | |
| S12 | Reverse Isolation | 40MHz 900MHz 1950MHz | dB | | -20 -22 -25 | |
| OP1dB | Output Power at 1dB Gain Compression | 40MHz 900MHz 1950MHz | dBm | | 21.8 22.4 22.5 | - |

Notes:

- Measurements obtained using demo board described in Figure 30 and 31. 40MHz data was taken with 40MHz – 2GHz Application Test Circuit, 900MHz data with 0.2GHz – 3GHz Application Test Circuit and 1.95GHz data with 1.5GHz – 2.6GHz Application Test Circuit respectively.
- OIP3 test condition: $F_{RF1} - F_{RF2} = 10\text{MHz}$ with input power of -15dBm per tone measured at worse side band.
- Use proper bias, heat sink and de-rating to ensure maximum channel temperature is not exceeded. See absolute maximum ratings and application note (if applicable) for more details.

Typical Performance (40MHz – 2GHz)

TA = +25°C, Vdd = 5V, Input Signal = CW. Application Test Circuit is shown in Figure 30 and Table 1.

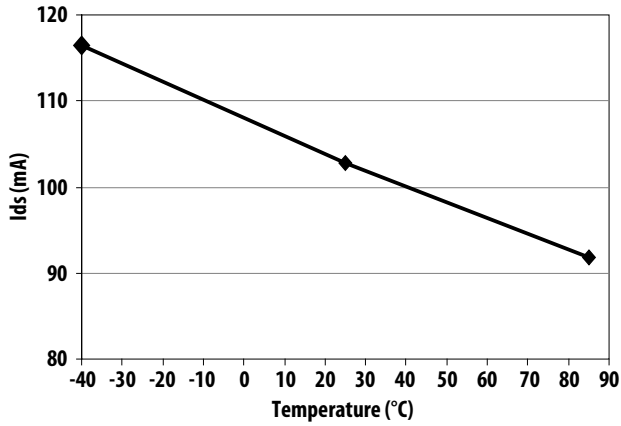


Figure 6. Ids over Temperature

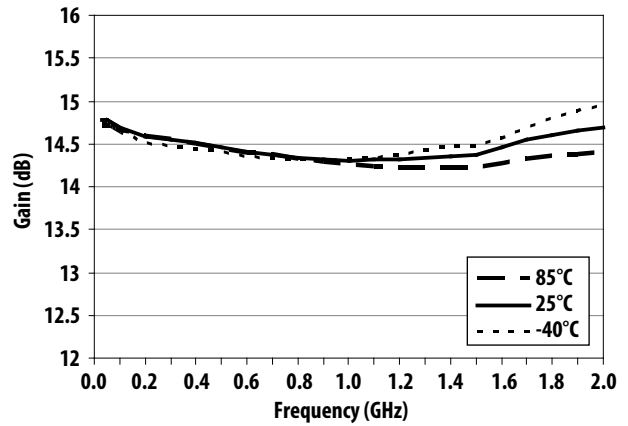


Figure 7. Gain over Frequency and Temperature

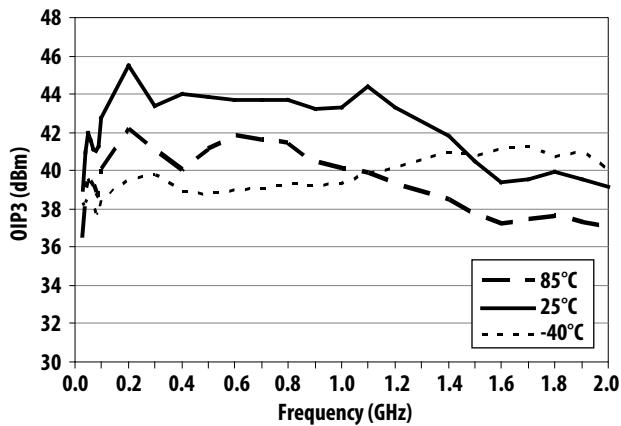


Figure 8. OIP3 over Frequency and Temperature

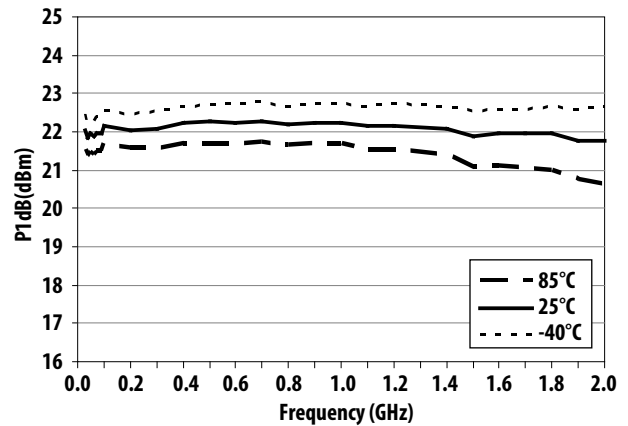


Figure 9. P1dB over Frequency and Temperature

Typical Performance (40MHz – 2GHz)

TA = +25°C, Vdd = 5V, Input Signal = CW. Application Test Circuit is shown in Figure 30 and Table 1.

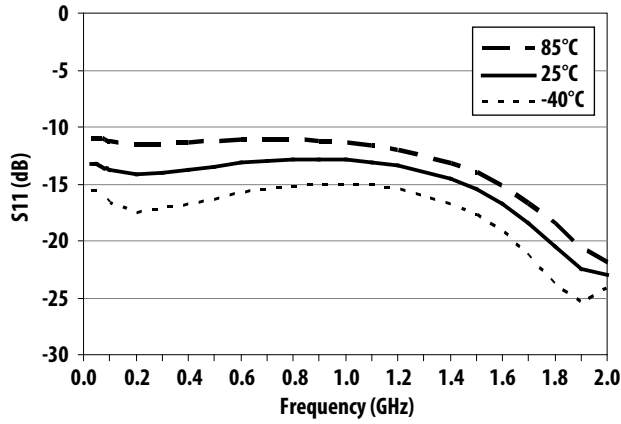


Figure 10. S11 over Frequency and Temperature

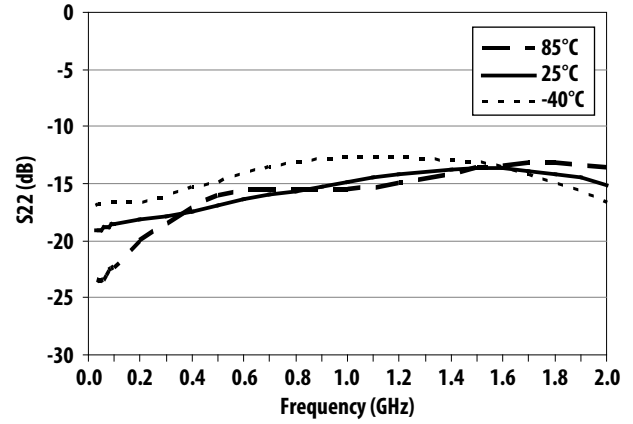


Figure 11. S22 over Frequency and Temperature

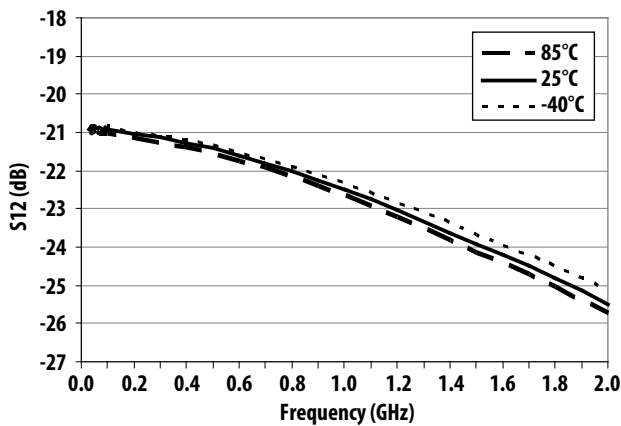


Figure 12. S12 over Frequency and Temperature

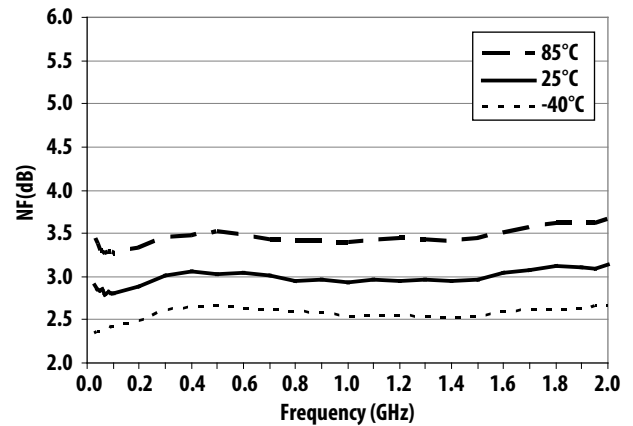


Figure 13. Noise Figure over Frequency and Temperature

Typical Performance (0.2GHz – 3GHz)

TA = +25°C, Vdd = 5V, Input Signal = CW. Application Test Circuit is shown in Figure 30 and Table 2.

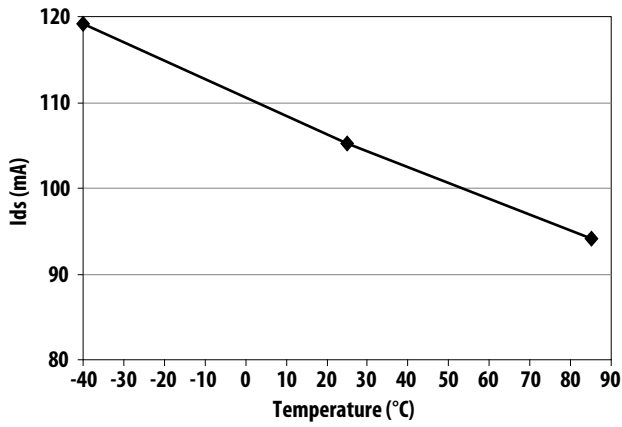


Figure 14. Ids over Temperature

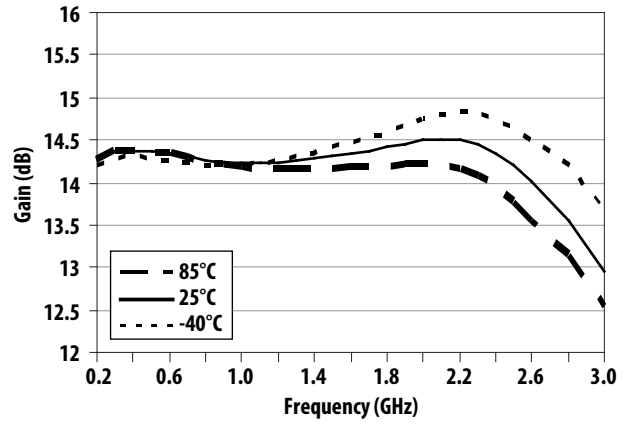


Figure 15. Gain over Frequency and Temperature

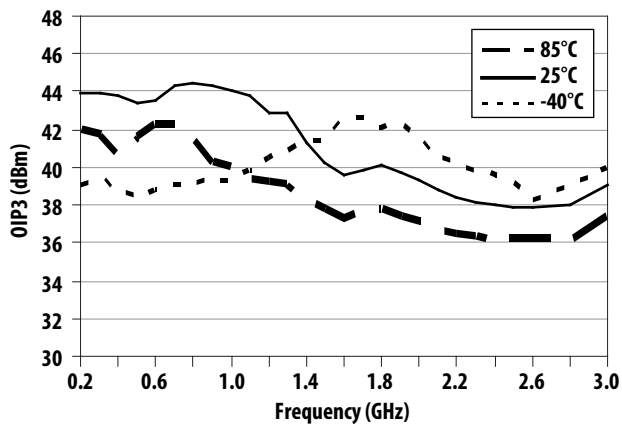


Figure 16. OIP3 over Frequency and Temperature

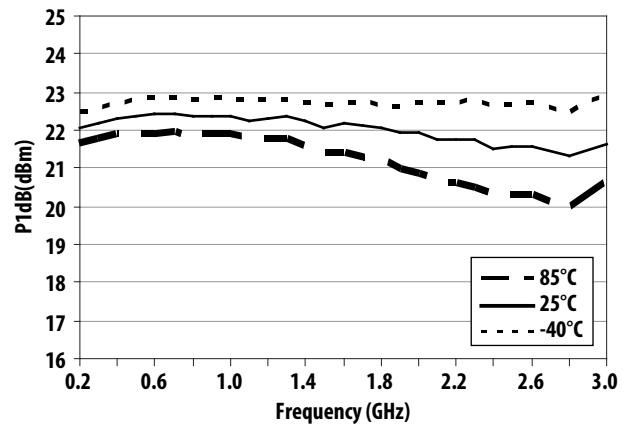


Figure 17. P1dB over Frequency and Temperature

Typical Performance (0.2GHz – 3GHz)

TA = +25°C, Vdd = 5V, Input Signal = CW. Application Test Circuit is shown in Figure 30 and Table 2.

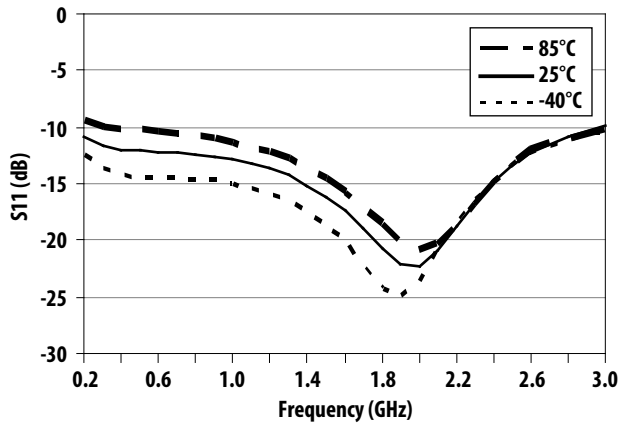


Figure 18. S11 over Frequency and Temperature

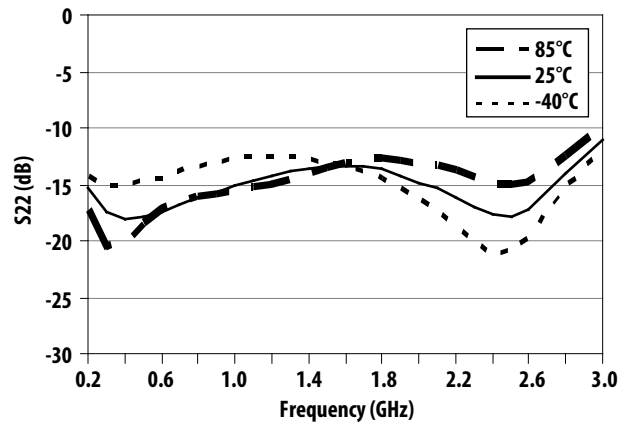


Figure 19. S22 over Frequency and Temperature

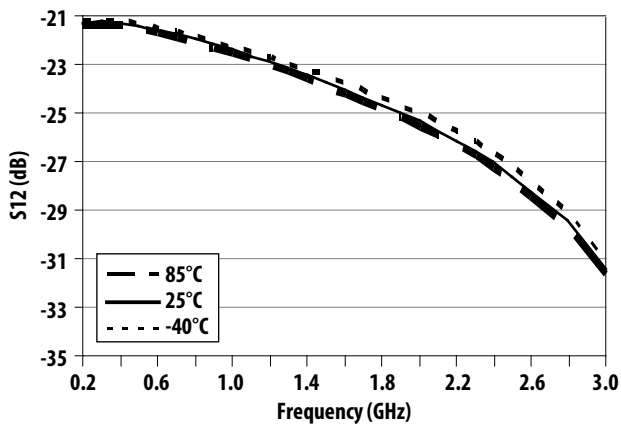


Figure 20. S12 over Frequency and Temperature

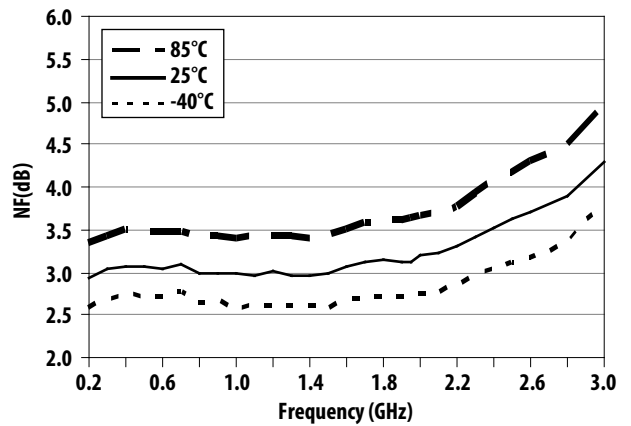


Figure 21. Noise Figure over Frequency and Temperature

Typical Performance (1.5GHz – 2.6GHz)

TA = +25°C, Vdd = 5V, Input Signal = CW. Application Test Circuit is shown in Figure 30 and Table 3.

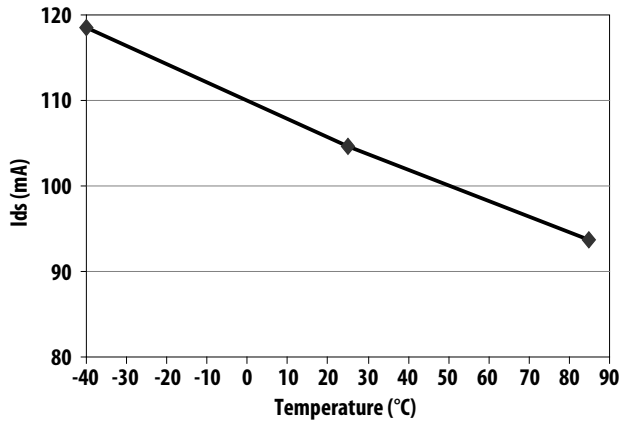


Figure 22. Ids over Temperature

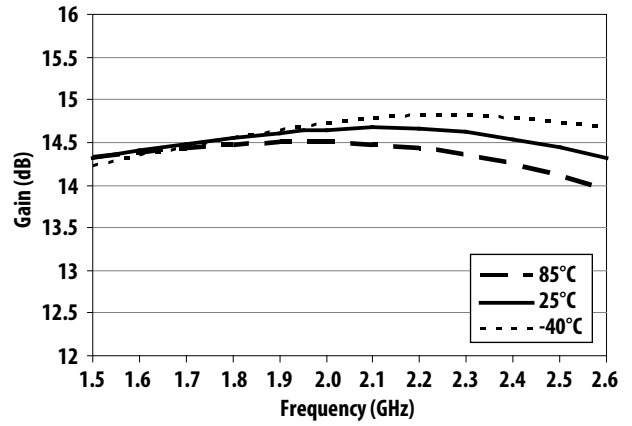


Figure 23. Gain over Frequency and Temperature

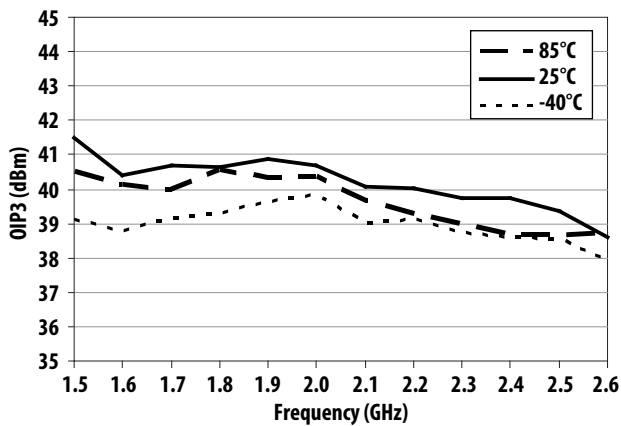


Figure 24. OIP3 over Frequency and Temperature

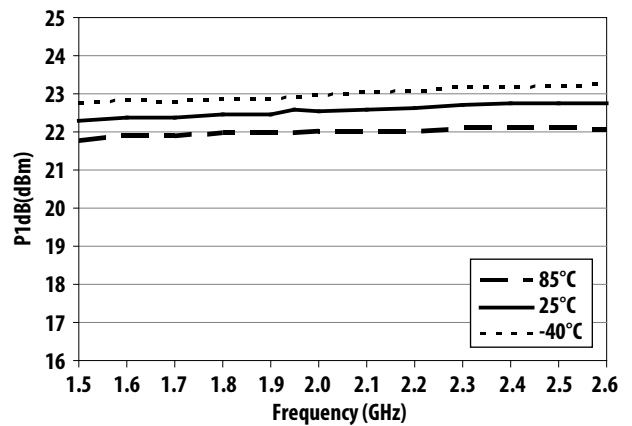


Figure 25. P1dB over Frequency and Temperature

Typical Performance (1.5GHz – 2.6GHz)

TA = +25°C, Vdd = 5V, Input Signal = CW. Application Test Circuit is shown in Figure 30 and Table 3.

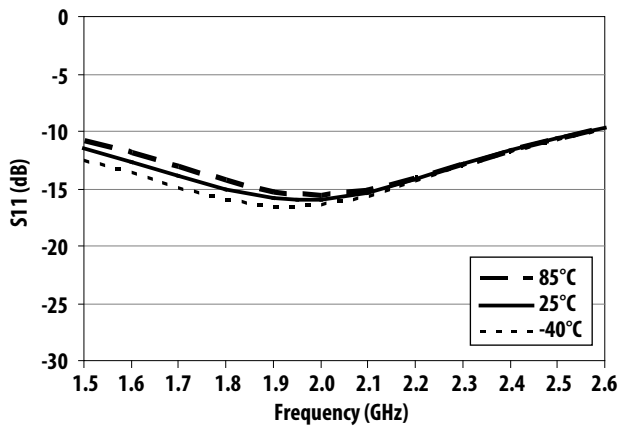


Figure 26. S11 over Frequency and Temperature

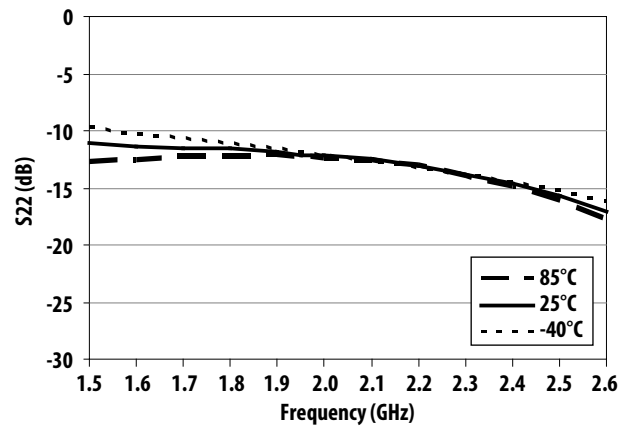


Figure 27. S22 over Frequency and Temperature

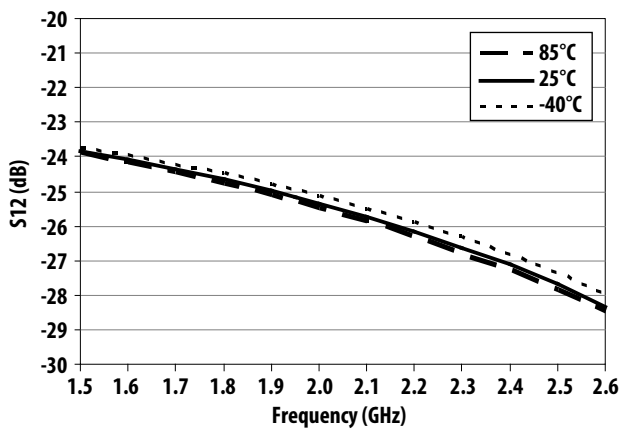


Figure 28. S12 over Frequency and Temperature

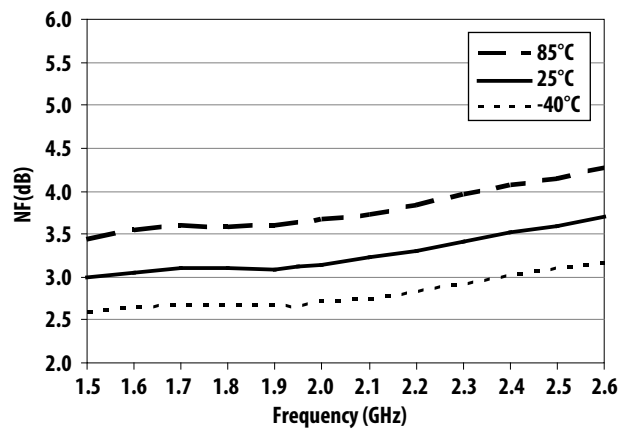


Figure 29. Noise Figure over Frequency and Temperature

Application Schematic Components Table and Demo Board


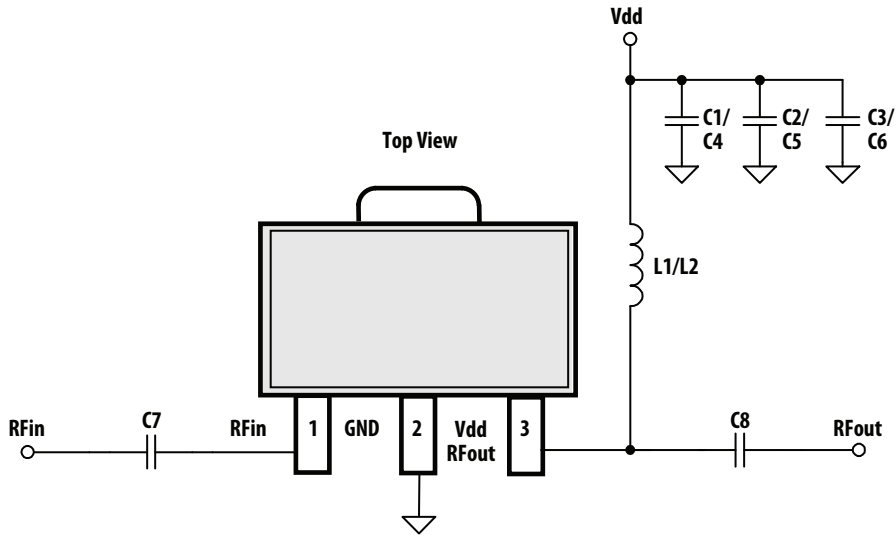


Figure 30. Application Schematic

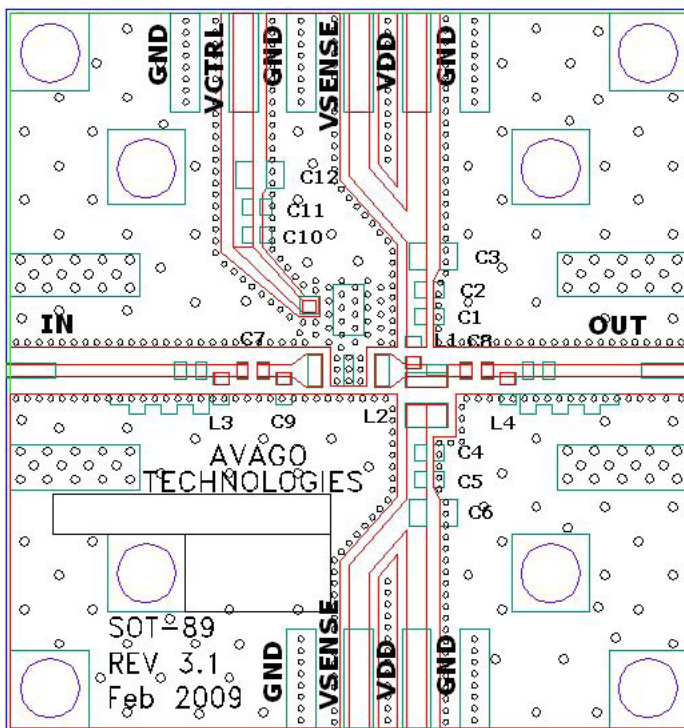

- Recommended PCB material is 10 mils Rogers RO4350, with FR4 backing for mechanical strength.
- Suggested component values may vary according to layout and PCB material.

Figure 31. Demo board Layout

Demo board Part List

Table 1. 40 MHz – 2 GHz Application Schematic Components

| Circuit Symbol | Size | Value | Part Number | Description |
|----------------|------|-------|-----------------------------|--------------------------|
| L2 | 0805 | 820nH | LLQ2012-series (Toko) | Wire Wound Chip Inductor |
| C4 | 0402 | 100pF | GRM1555C1H101JZ01B (Murata) | Ceramic Chip Capacitor |
| C5 | 0402 | 0.1uF | GRM155R71C104KA88D (Murata) | Ceramic Chip Capacitor |
| C6 | 0805 | 2.2uF | GRM21BR61E225KA12L (Murata) | Ceramic Chip Capacitor |
| C7 | 0402 | 0.1uF | GRM155R71C104KA88D (Murata) | Ceramic Chip Capacitor |
| C8 | 0402 | 0.1uF | GRM155R71C104KA88D (Murata) | Ceramic Chip Capacitor |

Table 2. 0.2 GHz – 3 GHz Application Schematic Components

| Circuit Symbol | Size | Value | Part Number | Description |
|----------------|------|-------|-----------------------------|------------------------|
| L1 | 0402 | 100nH | LL1005-FHLR10J (Toko) | MLC Inductor |
| C1 | 0402 | 10pF | GRM1555C1H100JZ01B (Murata) | Ceramic Chip Capacitor |
| C2 | 0402 | 0.1uF | GRM155R71C104KA88D (Murata) | Ceramic Chip Capacitor |
| C3 | 0805 | 2.2uF | GRM21BR61E225KA12L (Murata) | Ceramic Chip Capacitor |
| C7 | 0402 | 100pF | GRM1555C1H101JZ01B (Murata) | Ceramic Chip Capacitor |
| C8 | 0402 | 100pF | GRM1555C1H101JZ01B (Murata) | Ceramic Chip Capacitor |

Table 3. 1.5 GHz – 2.6 GHz Application Schematic Components

| Circuit Symbol | Size | Value | Part Number | Description |
|----------------|------|-------|-----------------------------|------------------------|
| L1 | 0402 | 5.6nH | LL1005-FHL5N6S (Toko) | MLC Inductor |
| C1 | 0402 | 100pF | GRM1555C1H101JZ01B (Murata) | Ceramic Chip Capacitor |
| C2 | 0402 | 0.1uF | GRM155R71C104KA88D (Murata) | Ceramic Chip Capacitor |
| C3 | 0805 | 2.2uF | GRM21BR61E225KA12L (Murata) | Ceramic Chip Capacitor |
| C7 | 0402 | 20pF | GRM1555C1H200JZ01B (Murata) | Ceramic Chip Capacitor |
| C8 | 0402 | 20pF | GRM1555C1H200JZ01B (Murata) | Ceramic Chip Capacitor |

Test Circuit for S-Parameter and Noise Parameter

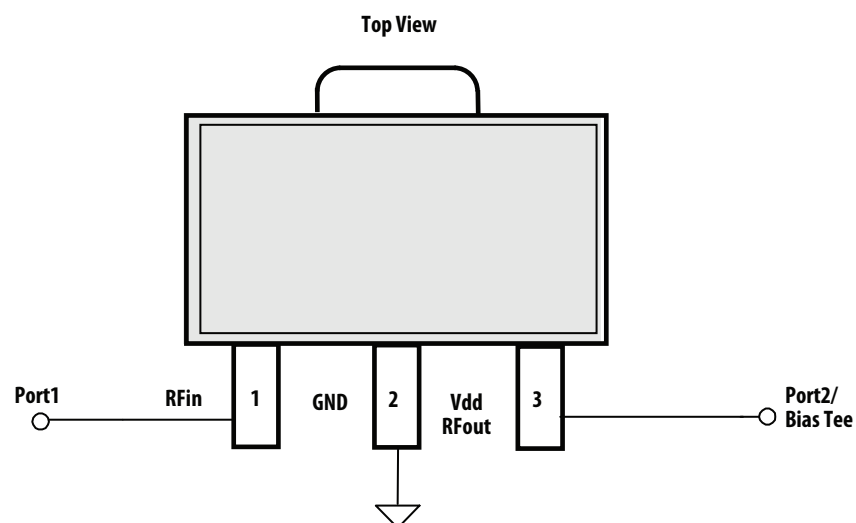


Figure 32. S-parameter and Noise parameter test circuit


Typical S-Parameter (Vdd=5V, T=25°C, 50 ohm)

| Freq (GHz) | S11 (dB) | S11 (ang) | S21 (dB) | S21 (ang) | S12 (dB) | S12 (ang) | S22 (dB) | S22 (ang) |
|------------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|
| 0.04 | -12.99 | -32.00 | 15.06 | 168.04 | -20.92 | 5.28 | -16.84 | -127.51 |
| 0.1 | -14.08 | -27.40 | 14.79 | 169.90 | -20.96 | -2.48 | -19.24 | -154.22 |
| 0.2 | -14.01 | -38.85 | 14.76 | 165.35 | -21.03 | -8.75 | -19.58 | -162.15 |
| 0.3 | -13.91 | -53.66 | 14.74 | 159.56 | -21.12 | -14.11 | -19.26 | -164.02 |
| 0.4 | -13.77 | -68.63 | 14.73 | 153.53 | -21.22 | -19.09 | -18.74 | -163.03 |
| 0.5 | -13.35 | -83.56 | 14.73 | 147.37 | -21.33 | -23.96 | -18.11 | -160.98 |
| 0.6 | -13.00 | -97.71 | 14.73 | 141.14 | -21.47 | -28.71 | -17.39 | -160.35 |
| 0.7 | -12.72 | -111.41 | 14.73 | 134.86 | -21.62 | -33.44 | -16.68 | -161.36 |
| 0.8 | -12.52 | -124.63 | 14.74 | 128.51 | -21.80 | -38.09 | -16.06 | -163.41 |
| 0.9 | -12.39 | -137.62 | 14.76 | 122.08 | -22.00 | -42.67 | -15.52 | -166.34 |
| 1 | -12.34 | -150.05 | 14.78 | 115.62 | -22.22 | -47.13 | -15.24 | -169.82 |
| 1.1 | -12.41 | -161.87 | 14.82 | 109.17 | -22.44 | -51.53 | -15.28 | -173.97 |
| 1.2 | -12.54 | -175.41 | 14.84 | 102.50 | -22.70 | -55.82 | -14.89 | -179.03 |
| 1.3 | -12.69 | 170.65 | 14.85 | 95.82 | -22.99 | -60.06 | -14.57 | 175.40 |
| 1.4 | -12.82 | 156.26 | 14.87 | 89.03 | -23.31 | -64.12 | -14.31 | 169.62 |
| 1.5 | -12.93 | 141.66 | 14.88 | 82.19 | -23.64 | -68.01 | -14.12 | 163.81 |
| 1.6 | -13.01 | 126.78 | 14.89 | 75.26 | -23.99 | -71.72 | -14.00 | 157.96 |
| 1.7 | -13.03 | 111.68 | 14.90 | 68.25 | -24.35 | -75.22 | -13.93 | 152.01 |
| 1.8 | -13.01 | 96.50 | 14.90 | 61.16 | -24.71 | -78.44 | -13.94 | 146.11 |
| 1.9 | -12.95 | 81.20 | 14.90 | 53.95 | -25.07 | -81.61 | -14.00 | 140.34 |
| 2 | -12.88 | 65.77 | 14.90 | 46.65 | -25.43 | -84.49 | -14.15 | 134.63 |
| 2.1 | -12.81 | 50.14 | 14.89 | 39.20 | -25.77 | -87.34 | -14.40 | 129.04 |
| 2.2 | -12.70 | 34.17 | 14.87 | 31.61 | -26.12 | -90.10 | -14.76 | 123.74 |
| 2.3 | -12.58 | 17.76 | 14.83 | 23.90 | -26.47 | -92.75 | -15.29 | 118.58 |
| 2.4 | -12.41 | 0.95 | 14.78 | 16.00 | -26.81 | -95.33 | -16.00 | 113.77 |
| 2.5 | -12.16 | -16.14 | 14.71 | 7.96 | -27.17 | -98.00 | -16.96 | 109.37 |
| 2.6 | -11.80 | -33.20 | 14.61 | -0.24 | -27.55 | -100.74 | -18.30 | 105.50 |
| 2.7 | -11.33 | -49.82 | 14.49 | -8.55 | -28.00 | -103.33 | -20.25 | 102.35 |
| 2.8 | -10.76 | -65.59 | 14.34 | -17.05 | -28.53 | -105.61 | -23.31 | 101.97 |
| 2.9 | -10.13 | -80.17 | 14.15 | -25.68 | -29.14 | -107.36 | -28.97 | 113.12 |
| 3 | -9.48 | -93.20 | 13.93 | -34.41 | -29.83 | -107.91 | -32.62 | -162.21 |
| 4 | -4.21 | -168.28 | 7.93 | -120.56 | -27.04 | -106.92 | -5.05 | 172.01 |
| 5 | -3.59 | 147.25 | 0.81 | -166.87 | -26.54 | -152.31 | -5.03 | 119.44 |
| 6 | -3.85 | 96.49 | -4.08 | 149.56 | -27.32 | 163.02 | -5.99 | 64.27 |
| 7 | -2.69 | 44.14 | -9.83 | 107.31 | -29.75 | 120.51 | -4.59 | 18.14 |
| 8 | -1.77 | 16.03 | -14.96 | 78.14 | -31.67 | 91.43 | -3.79 | -4.64 |
| 9 | -1.75 | -9.43 | -17.88 | 50.07 | -31.40 | 63.78 | -4.06 | -28.88 |
| 10 | -1.78 | -50.02 | -20.61 | 13.00 | -31.03 | 27.56 | -3.96 | -68.59 |
| 11 | -1.13 | -83.66 | -24.77 | -17.84 | -32.33 | -2.54 | -2.84 | -99.28 |
| 12 | -0.68 | -93.53 | -27.85 | -31.54 | -32.97 | -16.55 | -2.41 | -112.27 |
| 13 | -0.60 | -96.96 | -28.26 | -42.20 | -31.56 | -29.12 | -3.06 | -124.68 |
| 14 | -0.75 | -111.43 | -27.18 | -66.26 | -29.27 | -55.40 | -5.12 | -151.90 |
| 15 | -0.78 | -137.85 | -27.02 | -107.10 | -28.39 | -98.30 | -10.11 | 172.41 |
| 16 | -0.60 | -158.35 | -29.80 | -158.40 | -30.72 | -150.20 | -13.09 | -114.20 |
| 17 | -0.46 | -169.66 | -36.11 | 159.22 | -36.78 | 166.86 | -4.23 | -127.84 |
| 18 | -0.46 | -177.82 | -41.41 | 126.91 | -42.05 | 133.28 | -2.40 | -147.29 |
| 19 | -0.56 | 173.41 | -43.20 | 81.20 | -44.00 | 83.71 | -2.16 | -162.89 |
| 20 | -0.76 | 158.69 | -40.61 | 50.84 | -41.28 | 51.14 | -2.26 | -173.39 |

Typical Noise Parameters (Vdd=5V, T=25°C, 50 ohm)

| Freq (GHz) | Fmin (dB) | Γ_{opt} Mag | Γ_{opt} Ang | Rn/Z0 |
|-------------------|------------------|--------------------------------------|--------------------------------------|--------------|
| 0.4 | 3.04 | 0.203 | 13.20 | 0.522 |
| 0.9 | 2.80 | 0.205 | 14.50 | 0.466 |
| 1.0 | 2.87 | 0.208 | 16.30 | 0.468 |
| 1.7 | 2.82 | 0.211 | 19.80 | 0.496 |
| 1.85 | 2.81 | 0.214 | 20.80 | 0.512 |
| 2.0 | 2.83 | 0.217 | 26.10 | 0.526 |
| 2.5 | 3.05 | 0.280 | 51.60 | 0.59 |
| 3.0 | 3.84 | 0.356 | 95.30 | 0.596 |
| 3.5 | 4.27 | 0.468 | 142.00 | 0.362 |
| 4.0 | 5.18 | 0.537 | 174.50 | 0.234 |
| 4.5 | 5.20 | 0.522 | -163.90 | 0.29 |
| 5.0 | 6.16 | 0.534 | -142.24 | 0.618 |

SOT89 Package Dimensions

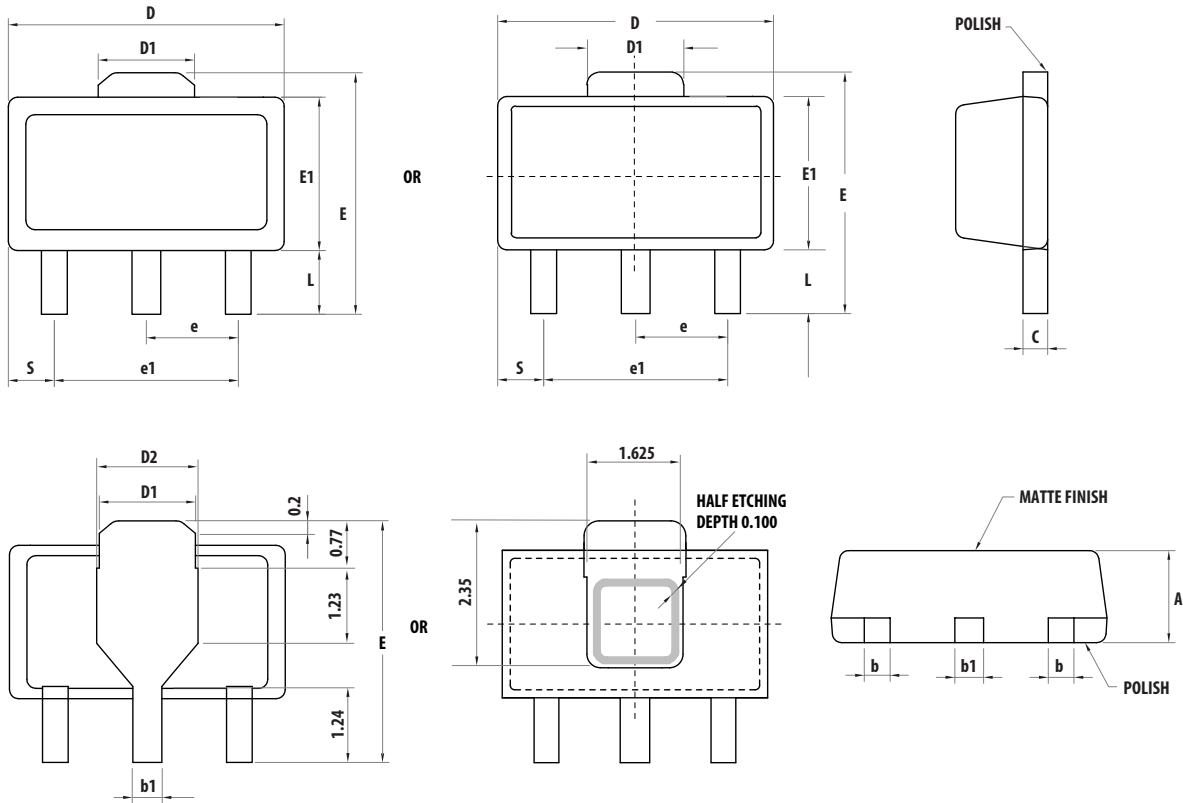


| Symbols | Dimensions in mm | | | Dimensions in inches | | |
|---------|------------------|---------|---------|----------------------|---------|---------|
| | Minimum | Nominal | Maximum | Minimum | Nominal | Maximum |
| A | 1.40 | 1.50 | 1.60 | 0.055 | 0.059 | 0.063 |
| L | 0.89 | 1.04 | 1.20 | 0.0350 | 0.041 | 0.047 |
| b | 0.36 | 0.42 | 0.48 | 0.014 | 0.016 | 0.018 |
| b1 | 0.41 | 0.47 | 0.53 | 0.016 | 0.018 | 0.030 |
| C | 0.38 | 0.40 | 0.43 | 0.014 | 0.015 | 0.017 |
| D | 4.40 | 4.50 | 4.60 | 0.173 | 0.177 | 0.181 |
| D1 | 1.40 | 1.60 | 1.75 | 0.055 | 0.062 | 0.069 |
| D2 | 1.45 | 1.65 | 1.80 | 0.055 | 0.062 | 0.069 |
| E | 3.94 | - | 4.25 | 0.155 | - | 0.167 |
| E1 | 2.40 | 2.50 | 2.60 | 0.094 | 0.098 | 0.102 |
| e1 | 2.90 | 3.00 | 3.10 | 0.114 | 0.118 | 0.122 |
| S | 0.65 | 0.75 | 0.85 | 0.026 | 0.030 | 0.034 |
| e | 1.40 | 1.50 | 1.60 | 0.054 | 0.059 | 0.063 |


Part Number Ordering Information

| Part Number | No. of Devices | Container |
|----------------|----------------|----------------|
| MGA-30689-BLKG | 100 | antistatic bag |
| MGA-30689-TR1G | 3000 | 13" Tape/ Reel |

Device Orientation

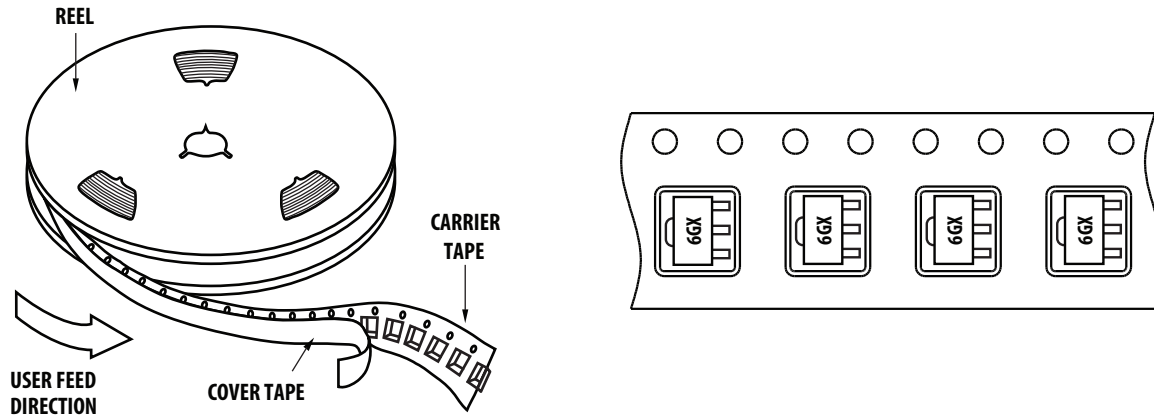

Tape Dimensions

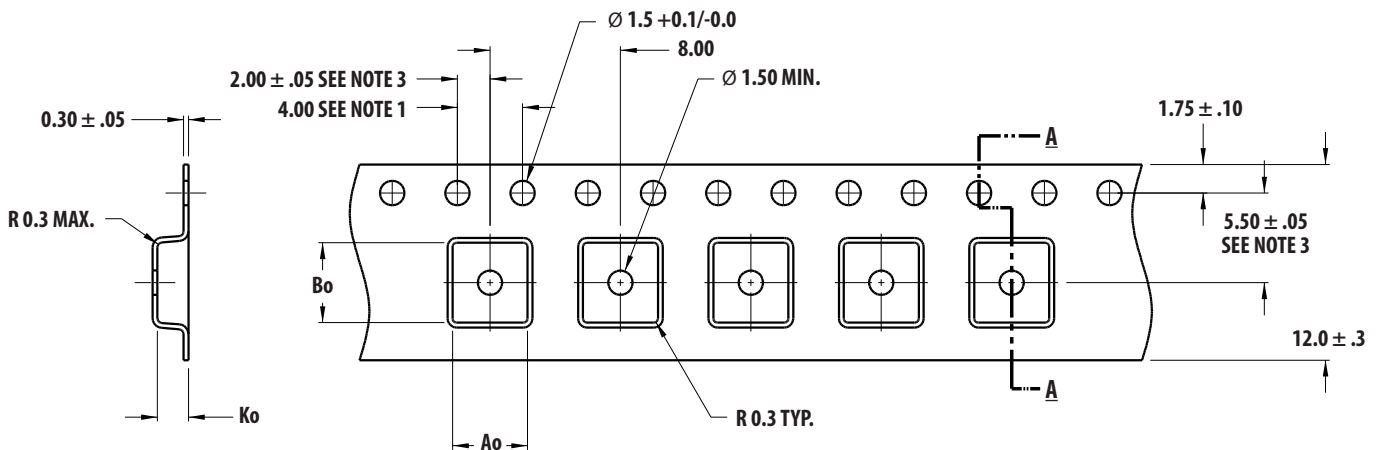

SECTION A - A


$Ao = 4.60$
 $Bo = 4.90$
 $Ko = 1.90$

DIMENSIONS IN MM

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
2. CAMBER IN COMPLIANCE WITH EIA 481
3. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE

Reel Dimensions – 13" Reel

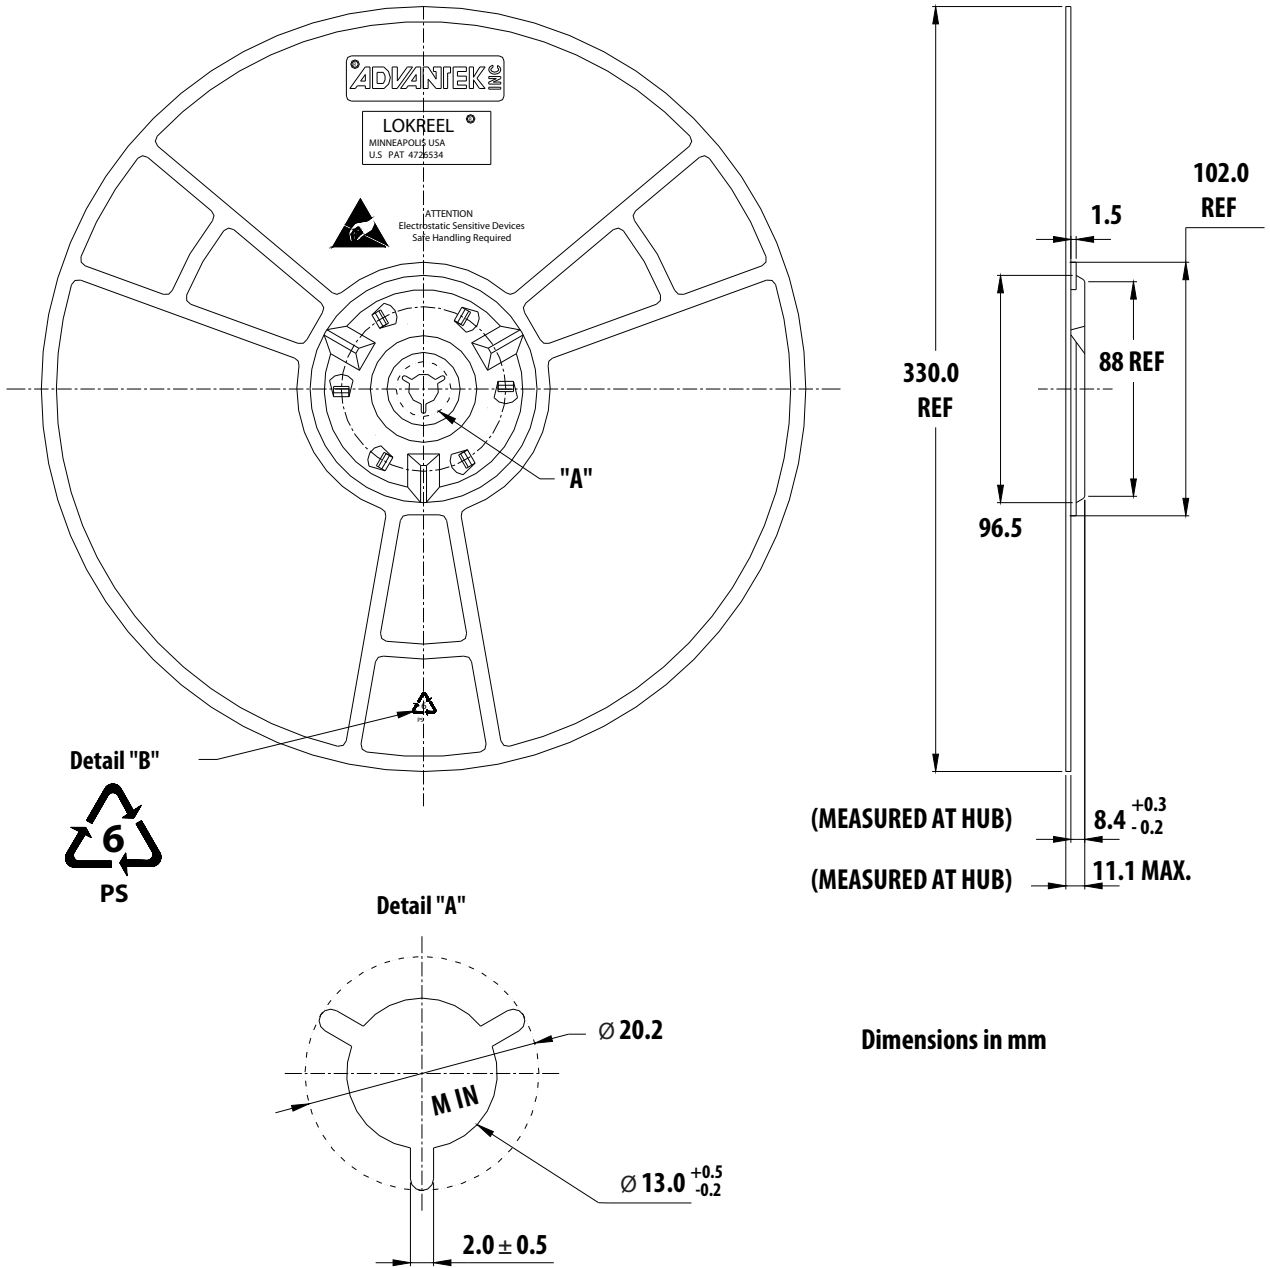

Dimensions in mm

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries. Data subject to change. Copyright © 2005-2013 Avago Technologies. All rights reserved. AV02-1876EN - May 23, 2013

