

KR Electronics

General Description


KR 2901 is a 110 MHz bandpass filter. The filter has a typical 1 dB bandwidth of 16 MHz. Other passband frequencies are available. Please consult the factory.

Features


- 110 MHz Center Frequency
- 16 MHz 1 dB Bandwidth
- SMA Connectors
- 50 Ω Source and Load

Typical Performance

Passband Amplitude & Group Delay
(1 dB/div and 10 nsec/div)

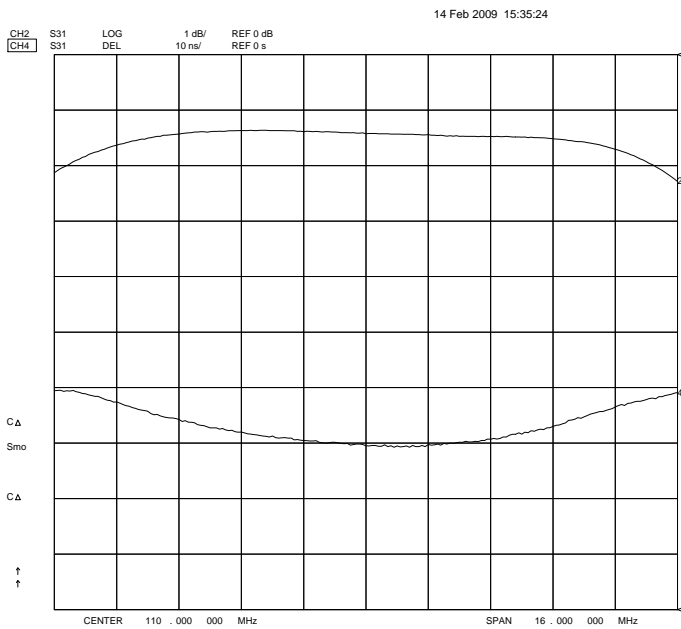

Overall Response
(10 dB/div)

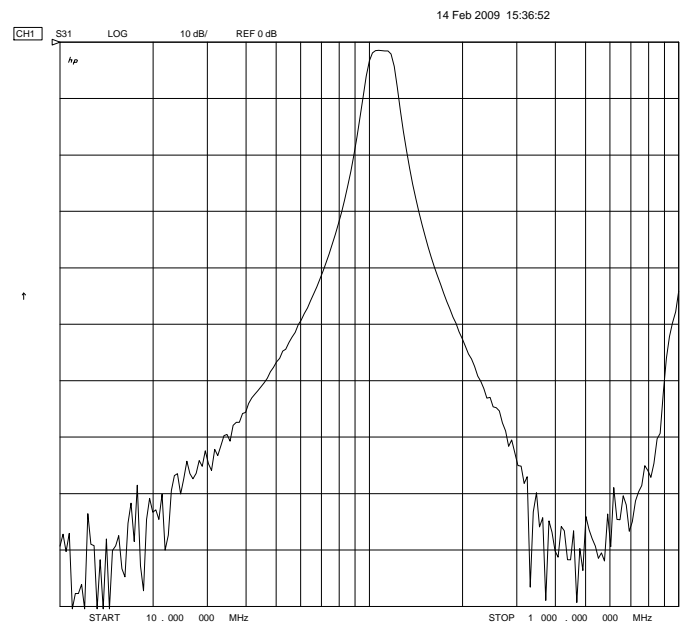

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 2901

Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	110 MHz
Insertion Loss	< 3 dB (1.5 dB typical)
1 dB Bandwidth	16 MHz typical
3 dB Bandwidth	21 MHz typical
40 dB Bandwidth	98 MHz typical
60 dB Bandwidth	192 MHz typical
Source and Load	50 Ω

Physical Dimensions

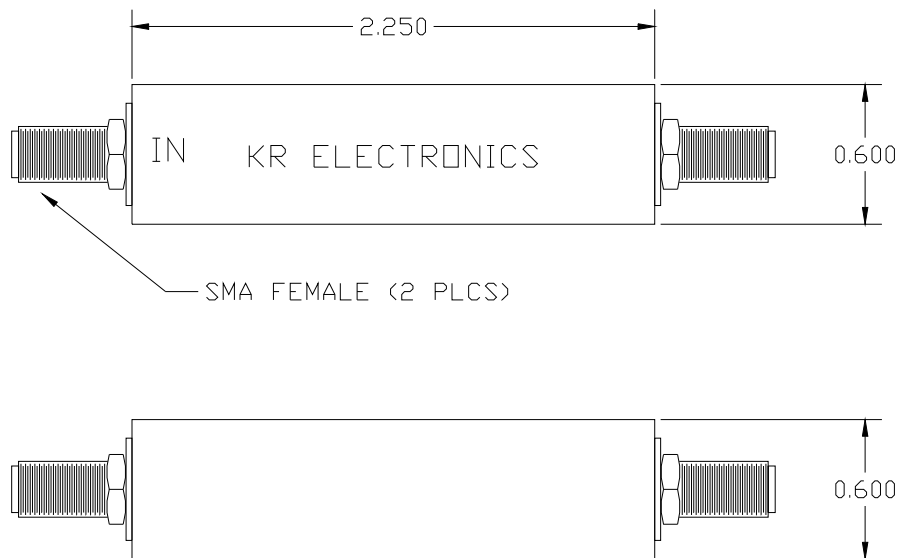

Dimensions in inches
Metal Case

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982